

# Compact Hydraulic Cylinders

Series CHE / CHD

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding







#### **Series HMI**

- Bore Sizes 25 through 200mm
- · ISO 6020/2 Interchangeable
- 12 Standard Mounting Styles
- · 210 Bar Hydraulic Service



#### Series 3L

- Bore Sizes 1.00" through 8.00"
- · Removable Rod Gland
- 15 Standard Mounting Styles
- 1,000 psi Nominal Hydraulic Service



#### **Position Indicating Switches**

- Head or cap mounted inductive and magnetic principal switches sense end-of-stroke
- Tie rod mounted switches actuated by a magnetic piston sense mid-stroke
- · Available Series 2H, 3L and 2A

In line with our policy of continuing product improvement, specifications and information contained in this catalog are subject to change.

Copyright ©2023 by Parker Hannifin Corporation. All rights reserved.

PRINTED IN THE U.S.A.

#### **⚠ WARNING**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from the Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having expertise. It is important that you analyze all aspects of your application, including consequences of any failure and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

#### Offer of Sale

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by provisions stated on a separate page of the document entitled 'Offer of Sale'.



### **Table of Contents**

# **Table of Contents**

| Description  | Page  | Section   |
|--|-------|-----------|
| Series CHE Aluminum Body Compact Hydraulic CylindersCylinder Features3Cylinder Weights and Force4Model Code & Standard Specifications5Mounting Styles6-13Global Position Sensing Switches14Solid State Switches/Wiring Connection15Reed Switches/Wiring Connection16-17Switch Mounting / End-of-Stroke Location18CPS Sensors19-20Cordsets21                      | 3-21  | CHE       |
| Series CHD Steel Body Compact Hydraulic Cylinders           Cylinder Features         22           Cylinder Weights and Force         23           Model Code & Standard Specifications         24           Mounting Styles         25-42           End-Of-Stroke Switch – EPS-C         43           C & CN Mount Manifold Port Interface Machining         44 | 22-44 | СНД       |
| Series CHE / CHDMinimum Rod Extension45Cylinder Mounting46-47Parts Identification48Seal Kits/Gland & Cap Spanner Holes49Cylinder Safety Guide50-51Manufacturing Locations52Offer of Sale53   | 45-53 | CHE / CHD |



# **Choose Series CHE & CHD Compact Hydraulic Cylinders**



# When mounting space is at a premium and the application demands a high force cylinder...




**Series CHE** is your choice when either End-Of-Stroke, mid-Stroke or continuous cylinder position indication is required and when operating pressures are up to 140 bar (depending on bore size).



**Series CHD** steel body cylinders are your best choice for high force requirements with operating pressures up to 207 bar. Available foot mounting with manifold ports enhances machine design flexibility. Optional End-Of-Stroke position indication is available.


#### **Series CHE Cylinder Features**

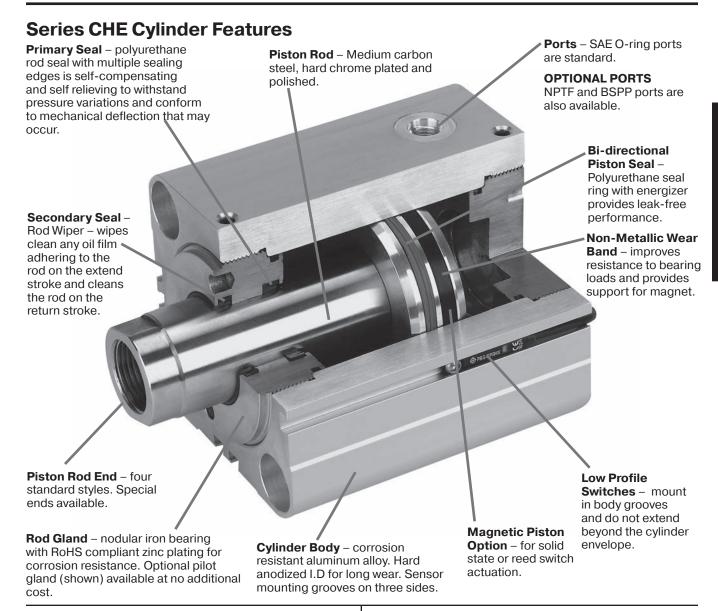


## **CHE Compact Hydraulic Cylinders...**

have a lower profile than tie rod construction cylinders with switches installed.

Optional Pilot Gland... offers added bearing area to increase service life and also improves alignment of cylinder and load.

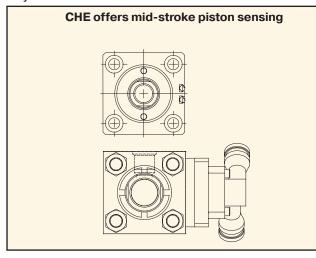

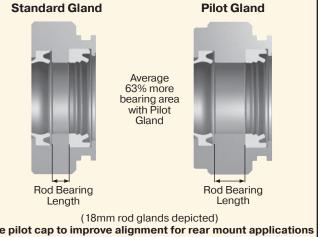

Use pilot cap to improve alignment for rear mount applications

#### Cylinder Weights and Force

#### Series CHE

#### **Theoretical Push and Pull Forces**

The cylinder output forces are derived from the formula:

$$F = \underbrace{Px A}_{10000}$$

Where F = Force in kN.

P = Pressure at the cylinder in bar.

A = Effective area of cylinder piston in square mm.

To determine the bore size for the application take the following steps.

#### 1. Select the Operating Pressure column closest to that desired.

- 2. In the same column, identify the force required to move the load (always rounding up). If the piston rod is in compression use the 'Push' row and if the piston rod is in tension use the 'Pull' row.
- 3. In the row to the left is the bore required.

If the cylinder envelope dimensions are too large for the application, increase the operating pressure to the maximum pressure in the table below, if possible, and repeat steps 1 - 3.

#### Push and Pull Force in kN

| Bore | Rod | Operating | Piston Area |      |      | Operation | ng Pressi | ure (Bar) |      |      |
|------|-----|-----------|-------------|------|------|-----------|-----------|-----------|------|------|
| Ø    | Ø   | Direction | (mm²)       | 20   | 40   | 60        | 80        | 100       | 120  | 140  |
| 20   | 12  | Push      | 314         | 0.63 | 1.26 | 1.88      | 2.51      | 3.14      | 3.77 | 4.40 |
| 20   | 12  | Pull      | 201         | 0.40 | 0.80 | 1.21      | 1.61      | 2.01      | 2.41 | 2.81 |
| 25   | 14  | Push      | 491         | 0.98 | 1.96 | 2.95      | 3.93      | 4.91      | 5.89 | 6.87 |
| 25   | 14  | Pull      | 337         | 0.67 | 1.35 | 2.02      | 2.70      | 3.37      | 4.04 | 4.72 |
| 32   | 18  | Push      | 804         | 1.61 | 3.22 | 4.83      | 6.43      | 8.04      | 9.65 | 11.3 |
| 32   | 10  | Pull      | 550         | 1.10 | 2.20 | 3.30      | 4.40      | 5.50      | 6.60 | 7.70 |
| 40   | 22  | Push      | 1,257       | 2.51 | 5.03 | 7.54      | 10.1      | 12.6      | 15.1 | 17.6 |
| 40   | ~~  | Pull      | 877         | 1.75 | 3.51 | 5.26      | 7.01      | 8.77      | 10.5 | 12.3 |
| 50   | 28  | Push      | 1,963       | 3.93 | 7.85 | 11.8      | 15.7      | 19.6      | 23.6 | -    |
| 50   | 20  | Pull      | 1,348       | 2.70 | 5.39 | 8.09      | 10.8      | 13.5      | 16.2 | -    |
| 63   | 36  | Push      | 3,117       | 6.23 | 12.5 | 18.7      | 24.9      | 31.2      | -    | -    |
| 03   | 30  | Pull      | 2,099       | 4.20 | 8.40 | 12.6      | 16.8      | 21.0      | -    | -    |
| 80   | 45  | Push      | 5,027       | 10.1 | 20.1 | 30.2      | 40.2      | 50.3      | -    | -    |
| 80   | 45  | Pull      | 3,436       | 6.87 | 13.7 | 20.6      | 27.5      | 34.4      | -    | -    |
| 100  | 56  | Push      | 7,854       | 15.7 | 31.4 | 47.1      | 62.8      | 78.5      | -    | -    |
| 100  | 50  | Pull      | 5,391       | 10.8 | 21.6 | 32.3      | 43.1      | 53.9      | -    | -    |

#### **Series CHE Pressure Rating**

| Bore | Maximum Working |
|------|-----------------|
| Ø    | Pressure in bar |
| 20   | 140             |
| 25   | 140             |
| 32   | 140             |
| 40   | 140             |
| 50   | 120             |
| 63   | 100             |
| 80   | 100             |
| 100  | 100             |

#### **Equivalents**

1 kN = 224.81 pounds force

1 bar = 14.50 psi

1 mm = .03937 inch

1 mm<sup>2</sup> = .00155 inch<sup>2</sup>

#### **Cylinder Weights**

To determine the weight of a Series CHE cylinder, first select the proper basic zero stroke weight for the mounting required, and then calculate the weight of

the cylinder stroke and add the result to the basic weight. For extra rod extension, use piston rod weights per mm in Table C.

**Table A** Single Rod End CHE Cylinder Weights in kg.

| Bore | Rod |         | Single Rod Cylinders |         |                   |              |           |                   |           |                   |              |  |  |  |  |  |  |
|------|-----|---------|----------------------|---------|-------------------|--------------|-----------|-------------------|-----------|-------------------|--------------|--|--|--|--|--|--|
| Ø    | Ø   | Basic \ | Neight               | at Zero | Stroke            | Per          | Basic \   | <b>Veight</b>     | at Zero   | Stroke            | Per          |  |  |  |  |  |  |
|      |     | 7       | Т                    | TN,     | TR                | mm<br>Stroke | J,        | Н                 | CA        |                   | mm<br>Stroke |  |  |  |  |  |  |
|      |     | PC 31   | PC B <sup>1</sup>    | PC 31   | PC B <sup>1</sup> | ou ono       | PC 31     | PC B <sup>1</sup> | PC 31     | PC B <sup>1</sup> | ou ono       |  |  |  |  |  |  |
| 20   | 12  | 0.24    | 0.25                 | 0.25    | 0.26              | 0.004        | 0.51      | 0.52              | 0.48      | 0.49              | 0.005        |  |  |  |  |  |  |
| 25   | 14  | 0.34    | 0.36                 | 0.35    | 0.37              | 0.005        | 0.71      | 0.73              | 0.69      | 0.71              | 0.006        |  |  |  |  |  |  |
| 32   | 18  | 0.62    | 0.66                 | 0.64    | 0.68              | 0.009        | 1.14      | 1.18              | 1.28      | 1.33              | 0.009        |  |  |  |  |  |  |
| 40   | 22  | 0.92    | 0.99                 | 0.95    | 1.02              | 0.011        | 1.86 1.93 |                   | 2.00      | 2.06              | 0.013        |  |  |  |  |  |  |
| 50   | 28  | 1.38    | 1.50                 | 1.44    | 1.55              | 0.015        | 2.97      | 3.09              | 3.12      | 3.24              | 0.017        |  |  |  |  |  |  |
| 63   | 36  | 2.33    | 2.54                 | 2.42    | 2.62              | 0.021        | 4.33      | 4.54              | 5.14      | 5.34              | 0.025        |  |  |  |  |  |  |
| 80   | 45  | 4.20    | 4.66                 | 4.34    | 4.80              | 0.031        | 7.68      | 8.14              | 8.67      | 9.13              | 0.036        |  |  |  |  |  |  |
| 100  | 56  | 8.02    | 8.86                 | 8.23    | 9.08              | 0.045        | 14.7      | 15.6              | .6 15.6 1 |                   | 0.051        |  |  |  |  |  |  |

**Table C** Piston rod weights in kg.

| Rod<br>Ø | Piston Rod<br>Weight per mm |
|----------|-----------------------------|
| 12       | 0.001                       |
| 14       | 0.001                       |
| 18       | 0.002                       |
| 22       | 0.003                       |
| 28       | 0.005                       |
| 36       | 0.008                       |
| 45       | 0.012                       |
| 56       | 0.019                       |
|          |                             |

#### **Table B** Double Rod End CHE Cylinder Weights in kg.

| Bore | Rod | Double Rod Cylinders |                   |         |                   |              |         |                   |                   |                   |       |  |  |  |  |  |
|------|-----|----------------------|-------------------|---------|-------------------|--------------|---------|-------------------|-------------------|-------------------|-------|--|--|--|--|--|
| Ø    | Ø   | Basic \              | Weight            | at Zero | Stroke            | Per          | Basic \ | Veight            | at Zero           | Stroke            | Per   |  |  |  |  |  |
|      |     | -                    | Т                 | Т       | N                 | mm<br>Stroke | •       | J                 | С                 | mm<br>Stroke      |       |  |  |  |  |  |
|      |     | PC 3 <sup>1</sup>    | PC B <sup>1</sup> | PC 31   | PC B <sup>1</sup> |              | PC 31   | PC B <sup>1</sup> | PC 3 <sup>1</sup> | PC B <sup>1</sup> |       |  |  |  |  |  |
| 20   | 12  | 0.26                 | 0.28              | 0.28    | 0.29              | 0.005        | 0.53    | 0.55              | 0.50              | 0.51              | 0.006 |  |  |  |  |  |
| 25   | 14  | 0.37                 | 0.40              | 0.39    | 0.41              | 0.007        | 0.75    | 0.77              | 0.72              | 0.75              | 0.008 |  |  |  |  |  |
| 32   | 18  | 0.68                 | 0.72              | 0.71    | 0.75              | 0.011        | 1.21    | 1.25              | 1.35              | 1.39              | 0.011 |  |  |  |  |  |
| 40   | 22  | 1.02                 | 1.09              | 1.06    | 1.13              | 0.014        | 1.97    | 2.04              | 2.10              | 2.17              | 0.016 |  |  |  |  |  |
| 50   | 28  | 1.59                 | 1.70              | 1.64    | 1.75              | 0.020        | 3.18    | 3.29              | 3.33              | 3.44              | 0.022 |  |  |  |  |  |
| 63   | 36  | 2.75                 | 2.95              | 2.84    | 3.04              | 0.029        | 4.75    | 4.95              | 5.56              | 5.76              | 0.033 |  |  |  |  |  |
| 80   | 45  | 5.00                 | 5.45              | 5.14    | 5.59              | 0.043        | 8.48    | 8.93              | 9.47              | 9.92              | 0.048 |  |  |  |  |  |
| 100  | 56  | 9.64                 | 10.5              | 9.86    | 10.7              | 0.065        | 16.3    | 17.2              | 17.2              | 18.1              | 0.071 |  |  |  |  |  |

#### Equivalent

1 kg = 2.2046 pounds


Note 1: PC 3 = with Piston Code 3 or 5 (Magnetic Piston), PC B = with Piston Code 9 or B (Non-Magnet Piston)



#### **Model Code & Standard Specifications**

#### **Series CHE**

#### **Model Ordering Code for CHE**

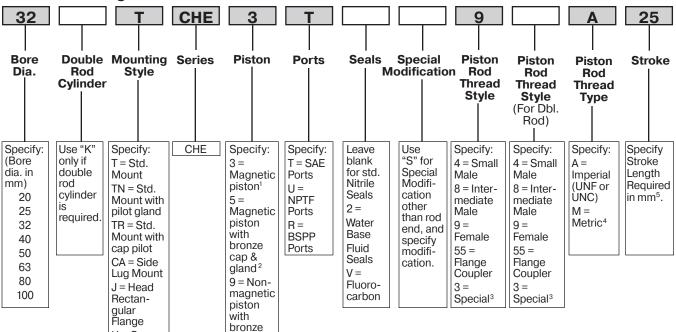

Shaded boxes identify required model number fields.

H = Cap

Rectan-

gular Flange

Order required Solid State or Reed Switches as separate items. See reed switch & solid state switch pages for specifications and part numbers.

cap.

& gland

B = Nonmagnetic piston.

- <sup>2</sup> Bronze cap and gland required for CPS linear cylinder position sensor (must be ordered separately).
- <sup>3</sup> To order thread style 3, specify "3" and give the desired dimensions for KK, A, and W (or WP or WR depending on mounting) or furnish a dimensioned sketch.
- <sup>4</sup> Always use M for rod style 55.
- <sup>5</sup> See Maximum Stroke chart at right.

#### **Maximum Stroke**

| Bore | Stroke <sup>6</sup> in mm    |  |  |  |  |  |  |  |  |  |  |
|------|------------------------------|--|--|--|--|--|--|--|--|--|--|
| Ø    | Mounting Styles<br>T, TN, TR | Bolt-on Mounting<br>Styles <sup>7</sup><br>J, H & CA |  |  |  |  |  |  |  |  |  |
| 20   | 100                          | 50   |  |  |  |  |  |  |  |  |  |
| 25   | 100                          | 75   |  |  |  |  |  |  |  |  |  |
| 32   | 150                          | 100  |  |  |  |  |  |  |  |  |  |
| 40   | 150                          | 100  |  |  |  |  |  |  |  |  |  |
| 50   | 150                          | 100  |  |  |  |  |  |  |  |  |  |
| 63   | 165                          | 100  |  |  |  |  |  |  |  |  |  |
| 80   | 165                          | 100  |  |  |  |  |  |  |  |  |  |
| 100  | 125                          | 100  |  |  |  |  |  |  |  |  |  |

Intermediate stroke's in 1mm increments are available.

#### **Standard Specifications**

- 6 Standard mounting styles
- Bore sizes 20mm to 100mm
- Piston Rod Diameter 12mm to 56mm
- · Single and double rod construction available
- Strokes up to 150mm depending on bore size

(see table above).

- Working pressure up to 140 bar (depending on bore size)
- Temperature range -23°C to +121°C (depending on seal class)
- Reference ISO 16656: 2004

| Seal Classes                                       | Typical Fluids  | Temperature Range  |
|--|---|--|
| 1 – Standard<br>Nitrile & Polyurethane             | Hydraulic Oil, MIL-H-5606 Oil   | -23°C (-10°F) to +100°C (+212°F)   |
| 2 – Optional<br>Water Base Fluid Seal              | Water-in-Oil Emulsion – Houghto-Safe 271,<br>620, 5040. Mobil Pyrogard D. Shell Irus 905.<br>Ucon Hydrolube J-4 | -23°C (-10°F) to +121°C (+250°F)   |
| 5 – Optional (at extra cost)<br>Fluorocarbon Seals | High Temperature  | -23°C (-10°F) to +121°C (+250°F) Class 5<br>seals may be operated up to +204°C (+400°F)<br>with reduced service life |


Note: Class 5 seals are not suitable for use with Skydrol fluid, but can be used with hydraulic oil if desired.




Des Plaines, Illinois USA

<sup>&</sup>lt;sup>7</sup> Longer strokes (up to maximum lengths for Mounting Styles T, TN & TR) are available at increased manufacturing lead times. Contact the factory.


#### Style T Through Bolt Mount – Single Rod End – 20mm to 100mm Bore Size



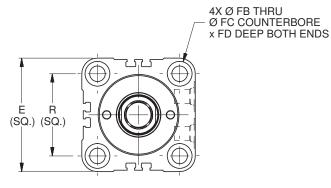

#### T Mount Single Rod End – Envelope and Mounting Dimensions


| Bore | E   |                 | EE   |       | EK EL |      | FB   | FC   | FD   | R   | W  | Add S | Stroke |
|------|-----|-----------------|------|-------|-------|------|------|------|------|-----|----|-------|--------|
| Ø    |     | SAE             | NPTF | BSP   |       |      | Ø    | Ø    |      |     |    | LB    | ZJ     |
| 20   | 43¹ | #2 <sup>2</sup> | 1/8  | G-1/8 | 6     | 16.5 | 5.5  | 9.5  | 5.4  | 30  | 8  | 43    | 51     |
| 25   | 49  | #2 <sup>2</sup> | 1/8  | G-1/8 | 8     | 17.5 | 5.5  | 9.5  | 5.4  | 36  | 8  | 45    | 53     |
| 32   | 62  | #4              | 1/4  | G-1/4 | 11    | 20.5 | 7    | 11   | 6.5  | 47  | 10 | 51    | 61     |
| 40   | 70  | #4              | 1/4  | G-1/4 | 12    | 21   | 9    | 14   | 8.6  | 52  | 10 | 55    | 65     |
| 50   | 80  | #4              | 1/4  | G-1/4 | 14    | 22.5 | 11   | 17.5 | 10.8 | 58  | 11 | 60    | 71     |
| 63   | 94  | #4              | 1/4  | G-1/4 | 17    | 26   | 13.5 | 20   | 13   | 69  | 13 | 67    | 80     |
| 80   | 114 | #6              | 3/8  | G-3/8 | 20    | 29.5 | 16   | 23   | 15.2 | 86  | 17 | 78    | 95     |
| 100  | 138 | #6              | 3/8  | G-3/8 | 25    | 35   | 18   | 26   | 17.5 | 106 | 26 | 96    | 122    |



Port Face Extension 20mm Bore Only

#### T Mount Single Rod End – Rod Dimensions

| Bore | ММ  |          |    |          |    |          | R  | od End   |    |          |    |    |       |     |    | Rod Extension Dimensions |    |    |  |
|------|-----|----------|----|----------|----|----------|----|----------|----|----------|----|----|-------|-----|----|--------------------------|----|----|--|
| Ø    | Rod | Style 9M |    | Style 4M |    | Style 9A |    | Style 4  | 1A | Style 8A |    |    | Style | 55M |    | Dimensions               |    |    |  |
|      |     | KK       | Α  | KK       | Α  | KK       | Α  | KK       | Α  | cc       | Α  | AD | AE    | AF  | AM | С                        | D  | NA |  |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10 | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6                        | 10 | 11 |  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12 | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6                        | 12 | 13 |  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15 | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8                        | 15 | 17 |  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20 | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8                        | 19 | 21 |  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24 | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9                        | 24 | 27 |  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30 | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11                       | 32 | 35 |  |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35 | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13                       | 39 | 43 |  |
| 100  | 56  | M42x4.5  | 45 | M42x2    | 56 | 1 1/2-12 | 45 | 1 1/2-12 | 56 | 1 3/4-12 | 70 | 42 | 16    | 35  | 52 | 22                       | 48 | 54 |  |

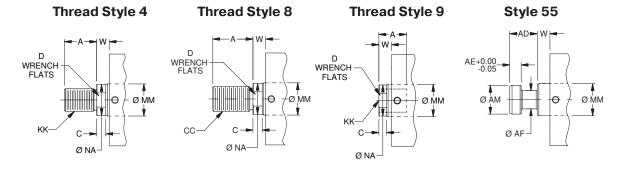




<sup>&</sup>lt;sup>1</sup> Port face on 20mm bore is extended 2mm. See port face extension drawing.

<sup>&</sup>lt;sup>2</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### Style T Through Bolt Mount - Double Rod End - 20mm to 100mm Bore Size

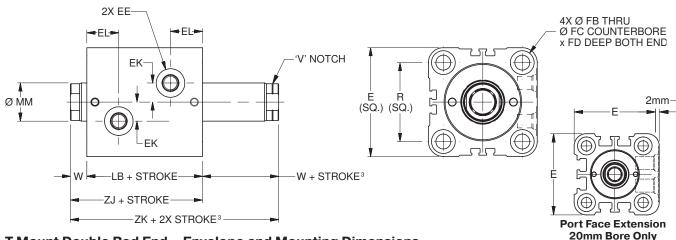


#### T Mount Double Rod End – Envelope and Mounting Dimensions

| Bore | E   |                 | EE   |       | EK | EL   | FB   | FC   | FD   | LB | R   | M <sub>3</sub> | Add S | troke | Add 2X Stroke   |
|------|-----|-----------------|------|-------|----|------|------|------|------|----|-----|----------------|-------|-------|-----------------|
| Ø    |     | SAE             | NPTF | BSP   |    |      | Ø    | Ø    |      |    |     |                | LB    | ZJ    | ZK <sup>3</sup> |
| 20   | 43¹ | #2 <sup>2</sup> | 1/8  | G-1/8 | 6  | 16.5 | 5.5  | 9.5  | 5.4  | 43 | 30  | 8              | 43    | 51    | 59              |
| 25   | 49  | #2 <sup>2</sup> | 1/8  | G-1/8 | 8  | 17.5 | 5.5  | 9.5  | 5.4  | 45 | 36  | 8              | 45    | 53    | 61              |
| 32   | 62  | #4              | 1/4  | G-1/4 | 11 | 20.5 | 7    | 11   | 6.5  | 51 | 47  | 10             | 51    | 61    | 71              |
| 40   | 70  | #4              | 1/4  | G-1/4 | 12 | 21   | 9    | 14   | 8.6  | 55 | 52  | 10             | 55    | 65    | 75              |
| 50   | 80  | #4              | 1/4  | G-1/4 | 14 | 22.5 | 11   | 17.5 | 10.8 | 60 | 58  | 11             | 60    | 71    | 82              |
| 63   | 94  | #4              | 1/4  | G-1/4 | 17 | 26   | 13.5 | 20   | 13   | 67 | 69  | 13             | 67    | 80    | 93              |
| 80   | 114 | #6              | 3/8  | G-3/8 | 20 | 29.5 | 16   | 23   | 15.2 | 78 | 86  | 17             | 78    | 95    | 112             |
| 100  | 138 | #6              | 3/8  | G-3/8 | 25 | 35   | 18   | 26   | 17.5 | 96 | 106 | 26             | 96    | 122   | 148             |

<sup>&</sup>lt;sup>1</sup> Port face on 20mm bore is extended 2mm. See port face extension drawing.

#### T Mount Double Rod End - Rod Dimensions

| Bore | ММ  |          | Rod End |          |    |                       |    |          |          |          |          |    |       |     |    |            |    | Rod Extension |  |  |
|------|-----|----------|---------|----------|----|-----------------------|----|----------|----------|----------|----------|----|-------|-----|----|------------|----|---------------|--|--|
| Ø    | Rod | Style 9  | M³      | Style 4M |    | Style 9A <sup>3</sup> |    | Style 4  | Style 4A |          | Style 8A |    | Style | 55M |    | Dimensions |    |               |  |  |
|      |     | KK       | Α       | KK       | Α  | KK                    | Α  | KK       | Α        | СС       | Α        | AD | AE    | AF  | AM | С          | D  | NA            |  |  |
| 20   | 12  | M8x1.25  | 10      | M8x1     | 14 | 5/16-24               | 10 | 5/16-24  | 14       | 3/8-24   | 16       | 8  | 3     | 6   | 11 | 6          | 10 | 11            |  |  |
| 25   | 14  | M10x1.5  | 12      | M10x1.25 | 16 | 3/8-24                | 12 | 3/8-24   | 16       | 1/2-20   | 18       | 12 | 4     | 8   | 13 | 6          | 12 | 13            |  |  |
| 32   | 18  | M12x1.75 | 15      | M12x1.25 | 18 | 7/16-20               | 15 | 7/16-20  | 18       | 9/16-18  | 25       | 16 | 6     | 10  | 16 | 8          | 15 | 17            |  |  |
| 40   | 22  | M16x2    | 20      | M16x1.5  | 22 | 5/8-18                | 20 | 5/8-18   | 22       | 3/4-16   | 30       | 20 | 8     | 12  | 20 | 8          | 19 | 21            |  |  |
| 50   | 28  | M20x2.5  | 24      | M20x1.5  | 28 | 3/4-16                | 24 | 3/4-16   | 28       | 7/8-14   | 35       | 24 | 10    | 16  | 25 | 9          | 24 | 27            |  |  |
| 63   | 36  | M27x3    | 30      | M27x2    | 36 | 1-14                  | 30 | 1-14     | 36       | 1 1/4-12 | 45       | 28 | 12    | 22  | 33 | 11         | 32 | 35            |  |  |
| 80   | 45  | M33x3.5  | 35      | M33x2    | 45 | 1 1/4-12              | 35 | 1 1/4-12 | 45       | 1 1/2-12 | 56       | 34 | 14    | 28  | 41 | 13         | 39 | 43            |  |  |
| 100  | 56  | M42x4.5  | 45      | M42x2    | 56 | 1 1/2-12              | 45 | 1 1/2-12 | 56       | 1 3/4-12 | 70       | 42 | 16    | 35  | 52 | 22         | 48 | 54            |  |  |

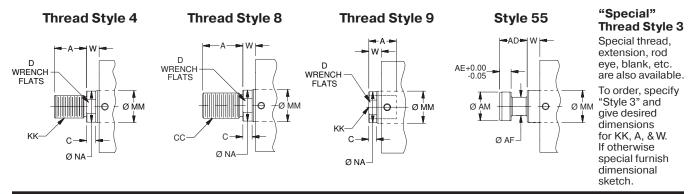




<sup>&</sup>lt;sup>2</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

<sup>&</sup>lt;sup>3</sup> Minimum 'W + Stroke' on V notch rod side may apply. See minimum rod extension page for details.

#### **Series CHE**

#### Styles TN and TR Through Bolt Mount with Pilot Gland or Pilot Cap -

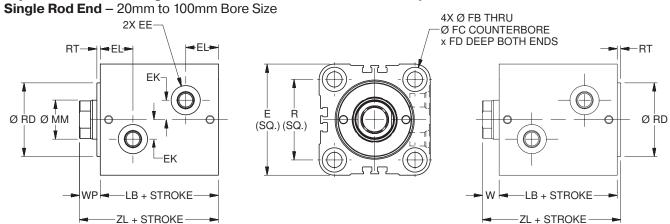

**Style TN Pilot Gland Mount** 

**Style TR Pilot Cap Mount** 

#### TN and TR Mount Single Rod End – Envelope and Mounting Dimensions


| Bore | E   |                 | EE   |       | EK | EL   | FB   | FC   | FD   | R   | RD Ø | RT | w  | WP | Add S | Stroke |
|------|-----|-----------------|------|-------|----|------|------|------|------|-----|------|----|----|----|-------|--------|
| Ø    |     | SAE             | NPTF | BSP   |    |      | Ø    | Ø    |      |     | f9   |    |    |    | LB    | ZL     |
| 20   | 43¹ | #2 <sup>2</sup> | 1/8  | G-1/8 | 6  | 16.5 | 5.5  | 9.5  | 5.4  | 30  | 24   | 3  | 8  | 11 | 43    | 54     |
| 25   | 49  | #2 <sup>2</sup> | 1/8  | G-1/8 | 8  | 17.5 | 5.5  | 9.5  | 5.4  | 36  | 27   | 3  | 8  | 11 | 45    | 56     |
| 32   | 62  | #4              | 1/4  | G-1/4 | 11 | 20.5 | 7    | 11   | 6.5  | 47  | 36   | 3  | 10 | 13 | 51    | 64     |
| 40   | 70  | #4              | 1/4  | G-1/4 | 12 | 21   | 9    | 14   | 8.6  | 52  | 43   | 3  | 10 | 13 | 55    | 68     |
| 50   | 80  | #4              | 1/4  | G-1/4 | 14 | 22.5 | 11   | 17.5 | 10.8 | 58  | 53   | 3  | 11 | 14 | 60    | 74     |
| 63   | 94  | #4              | 1/4  | G-1/4 | 17 | 26   | 13.5 | 20   | 13   | 69  | 66   | 3  | 13 | 16 | 67    | 83     |
| 80   | 114 | #6              | 3/8  | G-3/8 | 20 | 29.5 | 16   | 23   | 15.2 | 86  | 83   | 3  | 17 | 20 | 78    | 98     |
| 100  | 138 | #6              | 3/8  | G-3/8 | 25 | 35   | 18   | 26   | 17.5 | 106 | 103  | 3  | 26 | 29 | 96    | 125    |

<sup>&</sup>lt;sup>1</sup> Port face on 20mm bore is extended 2mm. See port face extension drawing on T Mount page.

#### TN and TR Mount Single Rod End - Rod Dimensions

| Bore | ММ  |          |    |          |    |          | R          | od End   |    |          |    |    |       |     |    |     | Exter |     |
|------|-----|----------|----|----------|----|----------|------------|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | М  | Style 4  | М  | Style 9  | 9 <b>A</b> | Style 4  | 1A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | Α  | KK       | Α  | KK       | Α          | KK       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10         | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12         | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15         | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20         | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24         | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30         | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35         | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |
| 100  | 56  | M42x4.5  | 45 | M42x2    | 56 | 1 1/2-12 | 45         | 1 1/2-12 | 56 | 1 3/4-12 | 70 | 42 | 16    | 35  | 52 | 22  | 48    | 54  |

#### **Rod End Dimensions**

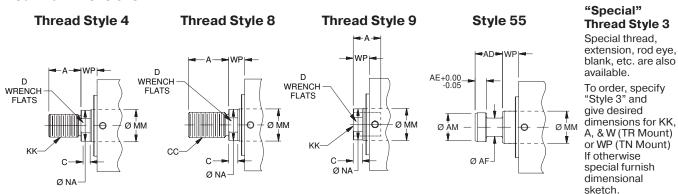


8

www.parker.com/schraderbellows



<sup>&</sup>lt;sup>2</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### Style TN Through Bolt Mount with Pilot Gland - Double Rod End - 20mm to 100mm Bore Size

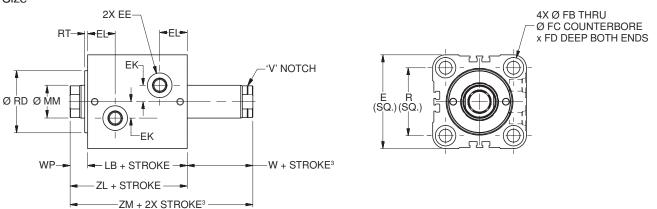


#### **TN Mount Double Rod End – Envelope and Mounting Dimensions**

| Bore | E   |                 | EE   |       | EK | EL   | FB   | FC   | FD   | R   | RD Ø | RT | M <sub>3</sub> | WP | Add S | troke | Add 2X Stroke   |
|------|-----|-----------------|------|-------|----|------|------|------|------|-----|------|----|----------------|----|-------|-------|-----------------|
| Ø    |     | SAE             | NPTF | BSP   |    |      | Ø    | Ø    |      |     | f9   |    |                |    | LB    | ZL    | ZM <sup>3</sup> |
| 20   | 43¹ | #2 <sup>2</sup> | 1/8  | G-1/8 | 6  | 16.5 | 5.5  | 9.5  | 5.4  | 30  | 24   | 3  | 8              | 11 | 43    | 54    | 62              |
| 25   | 49  | #2 <sup>2</sup> | 1/8  | G-1/8 | 8  | 17.5 | 5.5  | 9.5  | 5.4  | 36  | 27   | 3  | 8              | 11 | 45    | 56    | 64              |
| 32   | 62  | #4              | 1/4  | G-1/4 | 11 | 20.5 | 7    | 11   | 6.5  | 47  | 36   | 3  | 10             | 13 | 51    | 64    | 74              |
| 40   | 70  | #4              | 1/4  | G-1/4 | 12 | 21   | 9    | 14   | 8.6  | 52  | 43   | 3  | 10             | 13 | 55    | 68    | 78              |
| 50   | 80  | #4              | 1/4  | G-1/4 | 14 | 22.5 | 11   | 17.5 | 10.8 | 58  | 53   | 3  | 11             | 14 | 60    | 74    | 85              |
| 63   | 94  | #4              | 1/4  | G-1/4 | 17 | 26   | 13.5 | 20   | 13   | 69  | 66   | 3  | 13             | 16 | 67    | 83    | 96              |
| 80   | 114 | #6              | 3/8  | G-3/8 | 20 | 29.5 | 16   | 23   | 15.2 | 86  | 83   | 3  | 17             | 20 | 78    | 98    | 115             |
| 100  | 138 | #6              | 3/8  | G-3/8 | 25 | 35   | 18   | 26   | 17.5 | 106 | 103  | 3  | 26             | 29 | 96    | 125   | 151             |

<sup>&</sup>lt;sup>1</sup> Port face on 20mm bore is extended 2mm. See port face extension drawing on T Mount page.

#### **TN Mount Double Rod End – Rod Dimensions**

| Bore | ММ  |          |    |          |    |          | R          | od End   |    |          |    |    |       |     |    |     | Exter |     |
|------|-----|----------|----|----------|----|----------|------------|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | M³ | Style 4  | М  | Style 9  | <b>A</b> 3 | Style 4  | 1A | Style 8  | ВА |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | Α  | KK       | Α  | KK       | Α          | KK       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10         | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12         | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15         | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20         | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24         | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30         | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35         | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |
| 100  | 56  | M42x4.5  | 45 | M42x2    | 56 | 1 1/2-12 | 45         | 1 1/2-12 | 56 | 1 3/4-12 | 70 | 42 | 16    | 35  | 52 | 22  | 48    | 54  |

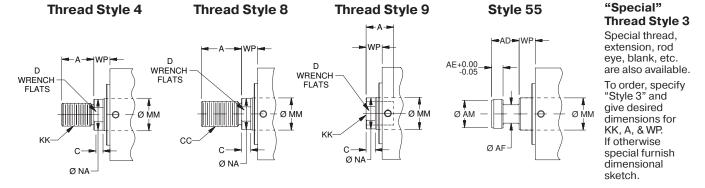




<sup>&</sup>lt;sup>2</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

<sup>&</sup>lt;sup>3</sup> Minimum 'W + Stroke' on V notch rod side may apply. See minimum rod extension page for details.

#### **Series CHE**

#### Styles J Rectangular Head Flange & H Rectangular Cap Flange Mounts –

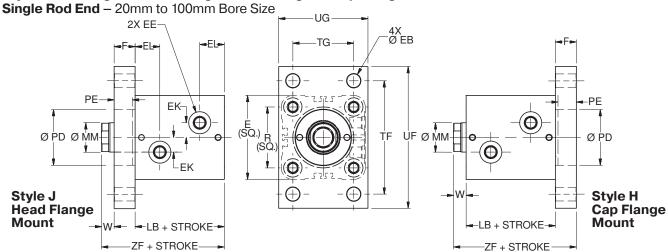


#### J & H Mounts Single Rod End - Envelope and Mounting Dimensions

| Bore | E   |                 | EE   |       | EK | EL   | F  | EB   | PDØ | PE | R   | TF  | TG  | UF  | UG  | W  | Add S | troke |
|------|-----|-----------------|------|-------|----|------|----|------|-----|----|-----|-----|-----|-----|-----|----|-------|-------|
| Ø    |     | SAE             | NPTF | BSP   |    |      |    | Ø    | Н9  |    |     |     |     |     |     |    | LB    | ZF    |
| 20   | 43¹ | #2 <sup>2</sup> | 1/8  | G-1/8 | 6  | 16.5 | 10 | 5.5  | 24  | 7  | 30  | 60  | 30  | 75  | 46  | 8  | 43    | 61    |
| 25   | 49  | #2 <sup>2</sup> | 1/8  | G-1/8 | 8  | 17.5 | 12 | 5.5  | 27  | 9  | 36  | 66  | 36  | 80  | 52  | 8  | 45    | 65    |
| 32   | 62  | #4              | 1/4  | G-1/4 | 11 | 20.5 | 12 | 6.8  | 36  | 9  | 47  | 80  | 40  | 95  | 62  | 10 | 51    | 73    |
| 40   | 70  | #4              | 1/4  | G-1/4 | 12 | 21   | 16 | 11   | 43  | 13 | 52  | 96  | 46  | 118 | 70  | 10 | 55    | 81    |
| 50   | 80  | #4              | 1/4  | G-1/4 | 14 | 22.5 | 20 | 13.5 | 53  | 17 | 58  | 108 | 58  | 135 | 85  | 11 | 60    | 91    |
| 63   | 94  | #4              | 1/4  | G-1/4 | 17 | 26   | 20 | 15   | 66  | 17 | 69  | 124 | 65  | 150 | 98  | 13 | 67    | 100   |
| 80   | 114 | #6              | 3/8  | G-3/8 | 20 | 29.5 | 25 | 17   | 83  | 21 | 86  | 154 | 87  | 185 | 118 | 17 | 78    | 120   |
| 100  | 138 | #6              | 3/8  | G-3/8 | 25 | 35   | 30 | 21.5 | 103 | 27 | 106 | 190 | 109 | 230 | 150 | 26 | 96    | 152   |

<sup>&</sup>lt;sup>1</sup> Port face on 20mm bore is extended 2mm. See port face extension drawing on T Mount page.

#### J & H Mounts Single Rod End - Rod Dimensions


| Bore | ММ  |          |    |          |    |          | R  | od End   |    |          |    |    |       |     |    |     | Exter |     |
|------|-----|----------|----|----------|----|----------|----|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | М  | Style 4  | М  | Style 9  | 9A | Style 4  | 1A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | Α  | KK       | Α  | KK       | Α  | KK       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10 | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12 | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15 | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20 | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24 | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30 | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35 | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |
| 100  | 56  | M42x4.5  | 45 | M42x2    | 56 | 1 1/2-12 | 45 | 1 1/2-12 | 56 | 1 3/4-12 | 70 | 42 | 16    | 35  | 52 | 22  | 48    | 54  |

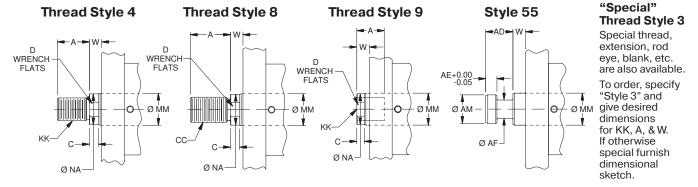



<sup>&</sup>lt;sup>2</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### Style J Rectangular Head Flange Mount - Double Rod End - 20mm to 100mm Bore Size

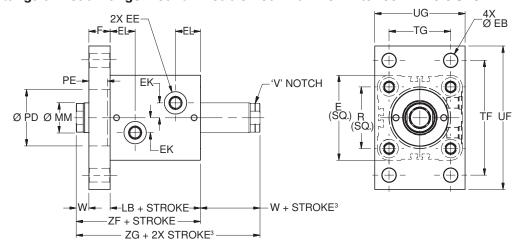


#### J Mount Double Rod End - Envelope and Mounting Dimensions

| Bore | Е   |                 | EE   |       | EK | EL   | F  | EB   | PD Ø | PE | R   | TF  | TG  | UF  | UG  | M <sub>3</sub> | Add S | troke | Add 2X Stroke   |
|------|-----|-----------------|------|-------|----|------|----|------|------|----|-----|-----|-----|-----|-----|----------------|-------|-------|-----------------|
| Ø    |     | SAE             | NPTF | BSP   |    |      |    | Ø    | Н9   |    |     |     |     |     |     |                | LB    | ZF    | ZG <sup>3</sup> |
| 20   | 43¹ | #2 <sup>2</sup> | 1/8  | G-1/8 | 6  | 16.5 | 10 | 5.5  | 24   | 7  | 30  | 60  | 30  | 75  | 46  | 8              | 43    | 61    | 69              |
| 25   | 49  | #2 <sup>2</sup> | 1/8  | G-1/8 | 8  | 17.5 | 12 | 5.5  | 27   | 9  | 36  | 66  | 36  | 80  | 52  | 8              | 45    | 65    | 73              |
| 32   | 62  | #4              | 1/4  | G-1/4 | 11 | 20.5 | 12 | 6.8  | 36   | 9  | 47  | 80  | 40  | 95  | 62  | 10             | 51    | 73    | 83              |
| 40   | 70  | #4              | 1/4  | G-1/4 | 12 | 21   | 16 | 11   | 43   | 13 | 52  | 96  | 46  | 118 | 70  | 10             | 55    | 81    | 91              |
| 50   | 80  | #4              | 1/4  | G-1/4 | 14 | 22.5 | 20 | 13.5 | 53   | 17 | 58  | 108 | 58  | 135 | 85  | 11             | 60    | 91    | 102             |
| 63   | 94  | #4              | 1/4  | G-1/4 | 17 | 26   | 20 | 15   | 66   | 17 | 69  | 124 | 65  | 150 | 98  | 13             | 67    | 100   | 113             |
| 80   | 114 | #6              | 3/8  | G-3/8 | 20 | 29.5 | 25 | 17   | 83   | 21 | 86  | 154 | 87  | 185 | 118 | 17             | 78    | 120   | 137             |
| 100  | 138 | #6              | 3/8  | G-3/8 | 25 | 35   | 30 | 21.5 | 103  | 27 | 106 | 190 | 109 | 230 | 150 | 26             | 96    | 152   | 178             |

<sup>&</sup>lt;sup>1</sup> Port face on 20mm bore is extended 2mm. See port face extension drawing on T Mount page.

#### J Mount Double Rod End - Rod Dimensions

| Bore | ММ  |          |    |          |    |          | R               | od End   |    |          |    |    |       |     |    |     | Exter |     |
|------|-----|----------|----|----------|----|----------|-----------------|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | M³ | Style 4  | М  | Style 9  | )A <sup>3</sup> | Style 4  | 4A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | Α  | KK       | Α  | KK       | Α               | KK       | Α  | СС       | Α  | AD | AE    | AF  | АМ | С   | D     | NA  |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10              | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12              | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15              | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20              | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24              | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30              | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35              | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |
| 100  | 56  | M42x4.5  | 45 | M42x2    | 56 | 1 1/2-12 | 45              | 1 1/2-12 | 56 | 1 3/4-12 | 70 | 42 | 16    | 35  | 52 | 22  | 48    | 54  |

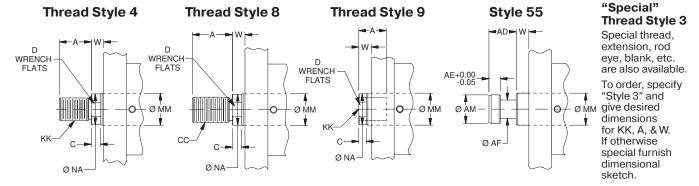




<sup>&</sup>lt;sup>2</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

<sup>&</sup>lt;sup>3</sup> Minimum 'W + Stroke' on V notch rod side may apply. See minimum rod extension page for details.

#### Style CA Side Lug Mount – Single Rod End – 20mm to 100mm Bore Size

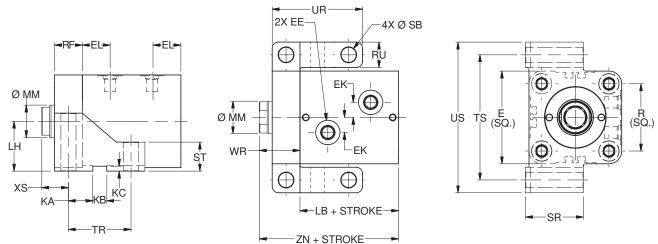


#### **CA Mount Single Rod End – Envelope and Mounting Dimensions**

| Bore | Е   |                 | EE   |       | EK | EL   | KA   | KB | кс   | LH | R   | RF | RU | SB   | SR | ST | TR | TS  | UR  | US  | WR | XS | Add S | Stroke |
|------|-----|-----------------|------|-------|----|------|------|----|------|----|-----|----|----|------|----|----|----|-----|-----|-----|----|----|-------|--------|
|      |     | SAE             | NPTF | BSP   |    |      |      |    |      |    |     |    |    | Ø    |    |    |    |     |     |     |    |    | LB    | ZN     |
| 20   | 43¹ | #2 <sup>2</sup> | 1/8  | G-1/8 | 6  | 16.5 | 12   | 5  | 2.75 | 24 | 30  | 10 | 10 | 5.5  | 25 | 10 | 29 | 58  | 39  | 68  | 18 | 13 | 43    | 61     |
| 25   | 49  | #22             | 1/8  | G-1/8 | 8  | 17.5 | 13.5 | 6  | 3.25 | 27 | 36  | 12 | 12 | 6.8  | 30 | 12 | 33 | 66  | 45  | 78  | 20 | 14 | 45    | 65     |
| 32   | 62  | #4              | 1/4  | G-1/4 | 11 | 20.5 | 16.5 | 8  | 3.75 | 34 | 47  | 16 | 15 | 9    | 35 | 15 | 41 | 82  | 57  | 97  | 26 | 18 | 51    | 77     |
| 40   | 70  | #4              | 1/4  | G-1/4 | 12 | 21   | 18.5 | 10 | 4.25 | 38 | 52  | 20 | 18 | 11   | 40 | 20 | 47 | 94  | 67  | 112 | 30 | 20 | 55    | 85     |
| 50   | 80  | #4              | 1/4  | G-1/4 | 14 | 22.5 | 21   | 12 | 4.25 | 43 | 58  | 24 | 22 | 13.5 | 50 | 25 | 54 | 108 | 78  | 130 | 35 | 23 | 60    | 95     |
| 63   | 94  | #4              | 1/4  | G-1/4 | 17 | 26   | 25   | 14 | 4.75 | 51 | 69  | 28 | 26 | 16   | 60 | 30 | 64 | 128 | 92  | 154 | 41 | 27 | 67    | 108    |
| 80   | 114 | #6              | 3/8  | G-3/8 | 20 | 29.5 | 30   | 16 | 5.25 | 61 | 86  | 32 | 30 | 18   | 70 | 35 | 76 | 152 | 108 | 182 | 49 | 33 | 78    | 127    |
| 100  | 138 | #6              | 3/8  | G-3/8 | 25 | 35   | 36.5 | 20 | 6.25 | 75 | 106 | 38 | 36 | 22   | 80 | 40 | 93 | 186 | 131 | 222 | 64 | 45 | 96    | 160    |

<sup>&</sup>lt;sup>1</sup> Port face on 20mm bore is extended 2mm. See port face extension drawing on T Mount page.

#### CA Mount Single Rod End – Rod Dimensions


| Bore | ММ  |          |    |          |    |          | R  | od End   |    |          |    |    |       |     |    |     | Exter |     |
|------|-----|----------|----|----------|----|----------|----|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | М  | Style 4  | М  | Style    | 9A | Style 4  | 4A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | Α  | KK       | Α  | KK       | Α  | KK       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10 | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12 | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15 | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20 | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24 | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30 | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35 | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |
| 100  | 56  | M42x4.5  | 45 | M42x2    | 56 | 1 1/2-12 | 45 | 1 1/2-12 | 56 | 1 3/4-12 | 70 | 42 | 16    | 35  | 52 | 22  | 48    | 54  |

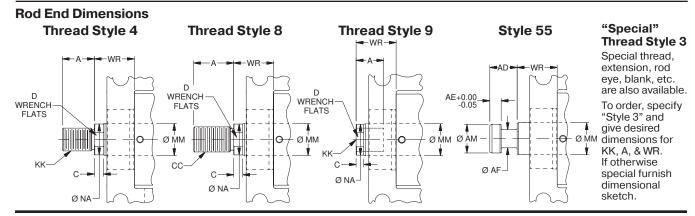



<sup>&</sup>lt;sup>2</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### Style CA Side Lug Mount - Double Rod End - 20mm to 100mm Bore Size

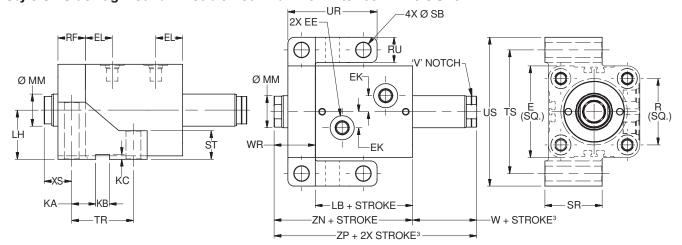

#### **CA Mount Double Rod End – Envelope and Mounting Dimensions**

| Bore<br>Ø | E   |                 | EE   |       | EK | EL   | KA   | КВ | кс   | LH | R   | RF | RU | SB<br>Ø | SR | ST | TR | TS  | UR  | US  | W³ | WR | xs | Ac<br>Str | dd<br>oke | Add 2X<br>Stroke |
|-----------|-----|-----------------|------|-------|----|------|------|----|------|----|-----|----|----|---------|----|----|----|-----|-----|-----|----|----|----|-----------|-----------|------------------|
|           |     | SAE             | NPTF | BSP   |    |      |      |    |      |    |     |    |    |         |    |    |    |     |     |     |    |    |    | LB        | ZN        | ZP <sup>3</sup>  |
| 20        | 43¹ | #2 <sup>2</sup> | 1/8  | G-1/8 | 6  | 16.5 | 12   | 5  | 2.75 | 24 | 30  | 10 | 10 | 5.5     | 25 | 10 | 29 | 58  | 39  | 68  | 8  | 18 | 13 | 43        | 61        | 69               |
| 25        | 49  | #2 <sup>2</sup> | 1/8  | G-1/8 | 8  | 17.5 | 13.5 | 6  | 3.25 | 27 | 36  | 12 | 12 | 6.8     | 30 | 12 | 33 | 66  | 45  | 78  | 8  | 20 | 14 | 45        | 65        | 73               |
| 32        | 62  | #4              | 1/4  | G-1/4 | 11 | 20.5 | 16.5 | 8  | 3.75 | 34 | 47  | 16 | 15 | 9       | 35 | 15 | 41 | 82  | 57  | 97  | 10 | 26 | 18 | 51        | 77        | 87               |
| 40        | 70  | #4              | 1/4  | G-1/4 | 12 | 21   | 18.5 | 10 | 4.25 | 38 | 52  | 20 | 18 | 11      | 40 | 20 | 47 | 94  | 67  | 112 | 10 | 30 | 20 | 55        | 85        | 95               |
| 50        | 80  | #4              | 1/4  | G-1/4 | 14 | 22.5 | 21   | 12 | 4.25 | 43 | 58  | 24 | 22 | 13.5    | 50 | 25 | 54 | 108 | 78  | 130 | 11 | 35 | 23 | 60        | 95        | 106              |
| 63        | 94  | #4              | 1/4  | G-1/4 | 17 | 26   | 25   | 14 | 4.75 | 51 | 69  | 28 | 26 | 16      | 60 | 30 | 64 | 128 | 92  | 154 | 13 | 41 | 27 | 67        | 108       | 121              |
| 80        | 114 | #6              | 3/8  | G-3/8 | 20 | 29.5 | 30   | 16 | 5.25 | 61 | 86  | 32 | 30 | 18      | 70 | 35 | 76 | 152 | 108 | 182 | 17 | 49 | 33 | 78        | 127       | 144              |
| 100       | 138 | #6              | 3/8  | G-3/8 | 25 | 35   | 36.5 | 20 | 6.25 | 75 | 106 | 38 | 36 | 22      | 80 | 40 | 93 | 186 | 131 | 222 | 26 | 64 | 45 | 96        | 160       | 186              |

<sup>&</sup>lt;sup>1</sup> Port face on 20mm bore is extended 2mm. See port face extension drawing on T Mount page.

#### **CA Mount Double Rod End – Rod Dimensions**

| Bore | ММ  |          |    |          |    |          | R               | od End   |    |          |    |    |       |     |    |     | Exter |     |
|------|-----|----------|----|----------|----|----------|-----------------|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | M³ | Style 4  | М  | Style 9  | )A <sup>3</sup> | Style 4  | 1A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | Α  | KK       | Α  | KK       | Α               | KK       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10              | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12              | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15              | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20              | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24              | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30              | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35              | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |
| 100  | 56  | M42x4.5  | 45 | M42x2    | 56 | 1 1/2-12 | 45              | 1 1/2-12 | 56 | 1 3/4-12 | 70 | 42 | 16    | 35  | 52 | 22  | 48    | 54  |

#### **Rod End Dimensions** "Special" **Thread Style 9 Thread Style 4** Thread Style 8 Style 55 Thread Style 3 -WR Special thread, extension, rod WR eye, blank, etc. are also available. D AE+0.00 -0.05 WRENCH WRENCH WRENCH To order, specify FLATS **FLATS** FLATS "Style 3" and give desired ØMM ØAM ØММ ØMM dimensions for V. KK, A, & WR. If otherwise CC. C-Ø AF special furnish C-ØNA dimensional sketch. Ø NA



<sup>&</sup>lt;sup>2</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

<sup>&</sup>lt;sup>3</sup> Minimum 'W + Stroke' on V notch rod side may apply. See minimum rod extension page for details.

# **Global Position Sensing Switches**



- Low Profile Keeps Switch Within Cylinder Envelope
- · Both Reed and Solid State Switch Versions
- · Switches Available World-Wide
- Solid State Switches use GMR Technology
- 3 Different Connection Styles
- Allow Position Sensing Anywhere Along Cylinder Stroke
- CE Approved



#### **Solid State Switches / Wiring Connection**

#### **Series CHE**

# Global Drop-In Solid State Switches ( ( UL)






| Wiring                       | PNP Switch |           |            | PNP Switch<br>High Temperature |
|------------------------------|------------|-----------|------------|--------------------------------|
| 3m Flying Leads              | P8SAGPFAX  | P8SAGNFAX | P8SAGPFAXS | P8S-GPFLH <sup>1</sup>         |
| 10m Flying Leads             | P8SAGPFDX  | P8SAGNFDX | NI /A      | NI /A                          |
| 0.3m Lead with 8mm Connector | P8SAGPCHX  | P8SAGNCHX | N/A        | N/A                            |

High Temperature switch is not UL Listed.

#### **Specifications**

| Switch Classification  | Standard<br>PNP or NPN          | ATEX Certified PNP                 | High Temperature PNP                 |
|--|---------------------------------|------------------------------------|--------------------------------------|
| Туре   | Electronic                      | Electronic                         | Electronic                           |
| Output Function  | Normally Open                   | Normally Open                      | Normally Open                        |
| Switch Output  | PNP/NPN                         | PNP                                | PNP                                  |
| Operating Voltage  | 10 - 30VDC                      | 10 - 30VDC                         | 10 - 30VDC                           |
| Continuous Current   | 100 mA max.                     | 50 mA max.                         | 200 mA max.                          |
| Magnetic Field Sensitivity                                   | 2.6 - 3.3mT                     | 2.8 mT                             | 25 Gauss                             |
| Switching Frequency  | 1 kHz                           | 1 kHz                              | 10 kHz                               |
| Power Consumption  | 8 mA max.                       | 10 mA max.                         | 15 mA max.                           |
| Voltage Drop   | 2 VDC max.                      | 2.2 VDC max.                       | 3.1 VDC max.                         |
| Ripple   | 10% of Operating<br>Voltage     | 10% of Operating<br>Voltage        | 15% of Operating<br>Voltage          |
| Hysteresis   | 1.5 mm max.                     | 1.5 mm max.                        | 1.5 mm max.                          |
| Repeatability  | 0.1 mm max.                     | 0.1 mm max.                        | 0.1 mm max.                          |
| EMC  | EN 60 947-5-2                   | EN 60 947-5-2                      | EN 60 947-5-2                        |
| Short-circuit Protection                                     | Yes                             | Yes                                | Yes                                  |
| Power-up Pulse Suppression                                   | Yes                             | Yes                                | Yes                                  |
| Reverse Polarity Protection                                  | Yes                             | Yes                                | Yes                                  |
| Enclosure Rating   | IP67                            | IP67                               | IP67                                 |
| Shock and Vibration Stress                                   | 30g, 11 ms,<br>10 to 55Hz, 1 mm | 30g, 11 ms,<br>10 to 55Hz, 1 mm    | 30g, 11 ms,<br>10 to 55Hz, 1 mm      |
| Operating Temperature Range -30°C to +80°C (-22°F to +176°F) |                                 | -20°C to +50°C<br>(-4°F to +122°F) | -25°C to +105°C<br>(-13°F to +221°F) |
| Housing Material   | PA 12 Black                     | PA 12 Black                        | Aluminum                             |
| Connector Cable  | PUR                             | PUR                                | PUR                                  |
| Connector  | PUR                             | _                                  | _                                    |
| Approval for ATEX  | _                               | 3D/3G                              | _                                    |

Global solid state switch outputs may be influenced by an external magnetic field. Care must be taken to avoid external magnetic field exposure.

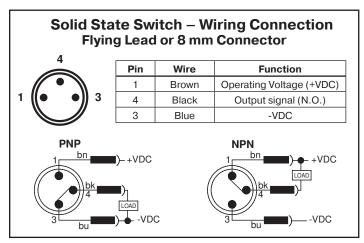



Des Plaines, Illinois USA

#### Series CHE

## Global Drop-In Reed Switches ( ( ( UL)



| Wiring                       | Reed Switch |
|------------------------------|-------------|
| 3m Flying Leads              | P8SAGRFAX   |
| 10m Flying Leads             | P8SAGEFRX   |
| 0.3m Lead with 8mm Connector | P8SAGRCHX   |

#### Specifications

| Specifications              |                                 |
|-----------------------------|---------------------------------|
| Type                        | 2-Wire Reed                     |
| Output Function             | Normally Open                   |
| Operating Voltage           | 5 - 30 VDC                      |
| Switching Power             | 6 W                             |
|                             |                                 |
| Response Sensitivity        | 2.1 - 3.4mT                     |
| Switching Frequency         | 400 Hz                          |
| Voltage Drop                | 3.5 VDC max.                    |
| Ripple                      | 10% of Operating Voltage        |
| Hysteresis                  | 1.5 mm max.                     |
| Repeatability               | 0.2 mm max.                     |
| EMC                         | EN 60 947-5-2                   |
| Reverse Polarity Protection | No                              |
| Enclosure Rating            | IP 67                           |
| Shock and Vibration Stress  | 30g, 11 ms, 10 to 55 Hz, 1 mm   |
| Operating Temperature Range | -30°C to +80°C (-22°F to 176°F) |
| Housing Material            | PA 12 Black                     |
| Connector Cable             | PUR                             |
| Connector                   | PUR                             |
|                             | Type                            |


| Reed Switch – Wiring Connection |     |       |                                 |  |
|---------------------------------|-----|-------|---------------------------------|--|
| Flying Lead or 8 mm Connector   |     |       |                                 |  |
| 4                               | Pin | Wire  | Function                        |  |
|                                 | 1   | Brown | Operating<br>Voltage (+V)       |  |
| 1 ((• •)) 3                     | 4   | Black | Not Used                        |  |
|                                 | 3   | Blue  | Output Signal<br>(-V or Ground) |  |

Global Reed Switch output may be influenced by external magnetic fields. Care must be taken to avoid external magnetic field exposure.

#### **Circuit for Switching Contact Protection (Inductive Loads)**

#### (Required for proper operation 24V DC)

Put Diode parallel to loads following polarity as shown below.



D: Diode: select a Diode with the breakdown voltage and current rating according to the load.

Typical Example—100 Volt, 1 Amp Diode CR: Relay coil (under 0.5W coil rating)

#### (Recommended for longer life 120 VAC)


Put a resistor and capacitor in parallel with the load. Select the resistor and capacitor according to the load.

#### Typical Example:

CR: Relay coil (under 2W coil rating)

Resistor 1 K - 5 K, 1/4 W

Capacitor 0.1 F, 600 V



#### / Caution

- Use an ampmeter to test reed switch current. Testing devices such as incandescent light bulbs may subject the reed sensor to high in-rush loads.
- NOTE: When checking an unpowered reed switch for continuity with a digital ohmmeter the resistance reading will change from infinity to a very large resistance (2 M ohm) when the sensor is activated. This is due to the presence of a diode in the reed switch.
- Anti-magnetic shielding is recommended for reed switches exposed to high external RF or magnetic fields.
- The magnetic field strength of the piston magnet is designed to operate with our switches. Other manufacturers' switches may not operate correctly in conjunction with these magnets.
- Use relay coils for reed switch contact protection.

- The operation of some 120 VAC PLC's (especially some older Allen-Bradley PLC's) can overload the reed switch. The switch may fail to release after the piston magnet has passed. This problem may be corrected by the placement of a 700 to 1K OHM resistor between the switch and the PLC input terminal. Consult the manufacturer of the PLC for appropriate circuit.
- Switches with long wire leads (greater than 15 feet) can cause capacitance build-up and sticking will result. Attach a resistor in series with the reed switches (the resistor should be installed as close as possible to the switches). The resistor should be selected such that R (ohms) >E/0.3.
- Global reed switch outputs may be influenced by an external magnetic field. Care must be taken to avoid external magnetic field exposure.




16


#### **Dimensions**

#### **Dimensions in mm (inch)**


#### PNP, NPN Output 10 to 30 V DC



#### Reed Output 5 to 30 V AC/DC




#### NAMUR ATEX 1G, 1D, ATEX 3G, 3D





- ① Connection
- Fixing screw
   Indication LED
- Position of sensor element; short overrun distance: 2 mm; long overrun distance: 1.7 mm

#### **Connector M8R**



#### **Switch Mounting / End-of-Stroke Location Series CHE**

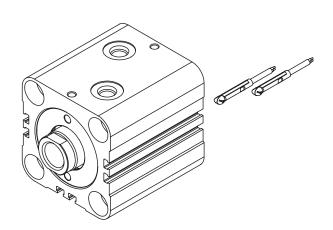



- 1. Slide the switch into any of the six mounting grooves provided.
- 2. For end of stroke sensing, position the triangle △on the switch at the specific distance from the cylinder body end as listed in the table below.
- 3. Locate the switch as required for intermediate stroke position sensing.
- 4. Turn the locking screw clockwise to secure the switch in place.


#### **Minimum Stroke for Cylinders with Switches**


| All Bores | One Switch | Two Switches |
|-----------|------------|--------------|
| All Bores | 5mm        | 10mm         |

#### **Switch Location for End-of-Stroke Sensing**

| Bore | Α    | В    |
|------|------|------|
| 20   | 24   | 18.5 |
| 25   | 25   | 19.5 |
| 32   | 28   | 22.5 |
| 40   | 31   | 23.5 |
| 50   | 33.5 | 26   |
| 63   | 37   | 29.5 |
| 80   | 42.5 | 35   |
| 100  | 53   | 42.5 |

#### Without Adapter directly in T-Slot

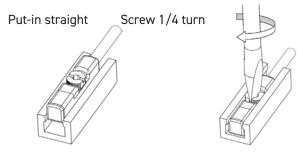

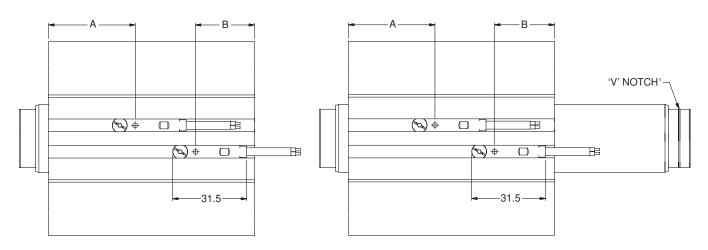

<sup>1</sup>The rod side for switch location 'B', on double rod end cylinders, is identified by a 'V' notch in the 'NA' diameter of rod end styles #4, #8, and #9. The 'V' notch will be in the 'AM' diameter of rod end style #55.



Des Plaines, Illinois USA

#### **CPS Cylinder Position Sensor** – with analog output

The CPS is a linear position sensor that can be used to measure the distance of Series CHE cylinder magnetic piston movement. Bronze cap and gland material (as specified with piston code 5 in the model number) are also required for proper functioning of the CPS. The Cylinder Position Sensor is available in four maximum measuring ranges – 32 mm, 64 mm, 96

| Maximum<br>Sensing Range | Part Number | Wiring          |
|--------------------------|-------------|-----------------|
| 32 mm                    | CPS-32      |                 |
| 64 mm                    | CPS-64      | 0.3m cable with |
| 96 mm                    | CPS-96      | 4-pin 8 mm      |
| 128 mm                   | CPS-128     | connector       |
| 160 mm                   | CPS-160     |                 |

|                  |   |   |   | -  |   |   |    |   |   |   |
|------------------|---|---|---|----|---|---|----|---|---|---|
| S                | n | Δ | C | IŤ | r | 2 | tı | റ | n | 9 |
| $\mathbf{\circ}$ | ~ | · | v |    | · | u |    | v |   | J |


| opcomoations                       |                                 |
|------------------------------------|---------------------------------|
| Type                               | Electronic                      |
| Supply Voltage                     | 15 – 30 VDC                     |
| Analog Output - Current            | 4 – 20 mA                       |
| Analog Output - Voltage            | 0 – 10 VDC                      |
| Max. Load Resistance - Currer      | nt Output500 Ohm                |
| Max. Load Resistance - Voltag      | e Output 2 kOhm                 |
| Idle Current typ                   | 25 mA                           |
|                                    | ± 1 mm                          |
|                                    | DC 4-Wire                       |
|                                    | 1 ms                            |
|                                    | 0.05 mm                         |
| Linearity typ                      | 0.3 mm                          |
| Repeat accuracy typ                | 0.1 mm                          |
| Piston Speed                       | 3m/s Maximum                    |
|                                    | 10% of Operating Voltage        |
| EMC                                | EN 60 947-5-7                   |
| Short Circuit Protection           | Yes                             |
| Overload Protection                | Yes                             |
| Reverse Polarity Protection        | Yes                             |
| Enclosure Rating                   | IP 67                           |
|                                    | . 30g, 11 ms, 10 to 55 Hz, 1 mm |
| <b>Operating Temperature Range</b> | 25°C to +70°C (-4°F to +158°F)  |
|                                    | PA Strengthened                 |
|                                    | PUR                             |
| Connector                          | PUR Cable w/8 mm connector      |
|                                    |                                 |

#### **Dimensions**

| L1<br>Sensing Range | L2  | L3  |
|---------------------|-----|-----|
| 32                  | 45  | 40  |
| 64                  | 77  | 72  |
| 96                  | 109 | 104 |
| 128                 | 141 | 136 |
| 160                 | 173 | 168 |

mm, 128 mm and 160 mm. The electrical zero and end points within each range are adjustable using the Teach-In button. Current (4 to 20 mA) and voltage (0 – 10 VDC) analog outputs are selectable through wiring connection and reverse acting of each output is achieved by reversing the zero and end points.



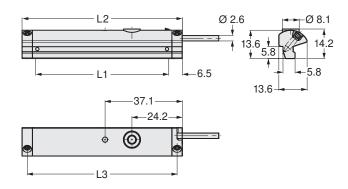

#### CPS Wiring Connection 8 mm 4-Pin Connector



| Pin | Wire  | Function                 |
|-----|-------|--------------------------|
| 1   | Brown | Operating Voltage (+VDC) |
| 3   | Blue  | -VDC                     |
| 4   | Black | 0 -10 VDC Output         |
| 2   | White | 4 – 20 mA Output         |



#### **Series CHE**

#### **Operating Instructions**

- Read the operating instructions before starting operation.
- Connection, assembly, and settings should be accomplished only by competent technicians.
- This sensor does not qualify as a safety component in accordance with EU machine guidelines.
- Use power source according to IEC/DIN EN 60204-1.
- Do not use ferrite components in the direct environment of the CPS.

#### **Proper Use**

The measurement signal is output via analog voltage or current. The yellow LED lights when the piston is within the measurement range (signal strength indicator). The desired Zero Point and End Point of the measurement range can be set precisely via the Teach-In button.

#### **Starting Operation**

#### 1. Positioning and securing the sensor:

Connect the sensor to operating voltage (see Specifications and Wiring Connection diagram). Insert the sensor into the cylinder mounting slot from above. Move the piston into the desired Zero Point position. The yellow LED lights when the piston is in the measurement range. Move the sensor along the slot until the LED switches off. Move the sensor back again until the LED lights. Secure the sensor appropriately. The measurement range does not need to be set. If the user does not Teach-In the measurement range, the maximum possible range is used as a default.

#### 2. Teach-In of measurement range (option):

Move the piston into the desired Zero Point position. Press the teach button for 2 seconds; LED blinks (3x/second). Release the Teach-In button; the Zero Point is stored. Set the piston position for the "End Point" of the measurement range. Press the Teach-In button: the

"End Point" of the measurement range is stored.

Note: If the Zero Point is external to the measurement range, the Teach-In procedure is aborted and the LED blinks quickly as a result (6x/s). If the Teach-In procedure is not concluded, there is a timeout after 90 seconds; the last taught-in measurement range is active.

#### 3. Check of the taught-in measurement range:

Move the piston and check the set measurement range using the LED. If necessary, correct the desired measurement range via a renewed Teach-In procedure.

# 4. Reset the measurement range to the default setting:

Press and hold the Teach-In button for at least 5 seconds. The sensor is reset to the default setting (max. measurement range).

#### Maintenance

Parker CPS magnetic cylinder sensors do not require any maintenance. It is recommend that the screw connections and plug-in connections be checked at regular intervals.

#### **Minimum Stroke**

To ensure that both CPS mounting screws engage in the cylinder body, the minimum stroke for each bore and sensor combination must be observed.

| Bore |        | oke    |        |         |         |
|------|--------|--------|--------|---------|---------|
| Ø    | CPS-32 | CPS-64 | CPS-96 | CPS-128 | CPS-160 |
| 20   | 2      | 34     | N/A    | N/A     | N/A     |
| 25   | _      | 32     | 64     | 96      | N/A     |
| 32   | _      | 26     | 58     | 90      | 122     |
| 40   | _      | 22     | 54     | 86      | 118     |
| 50   | _      | 17     | 49     | 81      | 113     |
| 63   | _      | 10     | 42     | 74      | 106     |
| 80   | _      | _      | 31     | 63      | 95      |
| 100  | _      | _      | 13     | 45      | 77      |

#### **Cordset for CPS Sensors**


The 4-pin, 8 mm threaded connector on this cordset can be used only with CPS Sensors.

#### **Cordset Specifications**

| ou accepcomoa     |  |
|-------------------|--|
| Connector         | Oil resistant polyurethane body<br>material, PA 6 (Nylon) contact carrier,<br>spacings to VDE 0110 Group C |
| Contacts          | Gold plated brass  |
| Cord Construction | Oil resistant black PUR jacket, non-<br>wicking, non-hygroscopic, 300V.                                    |
| Cable             |  |
|                   | end is stripped and tinned.  |
| Conductors        | Extra high flex stranding, PVC insulation.   |
| Temperature       | -40°C to +90°C (-40°F to +176°F)   |
| Protection        | NEMA 6 / IP67  |
| Cable Length      | 2m (6.56 ft) or 5m (16.40 ft)  |

#### 8 mm 4-Pin Connector

| Cable Length | Part Number |
|--------------|-------------|
| 5 meters     | 096043T005  |
| 2 meters     | 096043T002  |

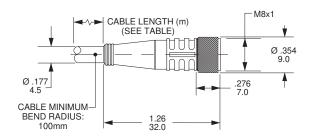



#### **Series CHE**

#### **8mm Cordset for Global Switches**

A female connector is available for all switches with the male 8mm quick connect option. The cordsets are available with a right angle or straight connector. Cordset part numbers are listed below.

#### **8mm Cordset**


| Cable Length | Threaded<br>Connector | Snap On<br>Connector |
|--------------|-----------------------|----------------------|
| 5 meters     | 086620T005            | 086620S005           |
| 2 meters     | 086620T002            | 086620S002           |

#### **Cordset Specifications**


| Connector         | Oil resistant polyurethane body<br>material, PA 6 (Nylon) contact carrier,<br>spacings to VDE 0110 Group C, (150<br>AC/DC) |
|-------------------|--|
| Contacts          | Gold plated beryllium copper, machined from solid stock  |
| Coupling Method   | Snap-Lock or chrome plated brass nut   |
| Cord Construction | Oil resistant black PUR jacket, non-wicking, non-hygroscopic, 300V.  |


Cable end is stripped and tinned. Conductors ..... Extra high flex stranding, PVC insulation Temperature.....-40 to 194°F (-40 to 90°C) Protection ......NEMA 1, 3, 4, 6P and IEC 1P67 Cable Length...........6.56 ft (2m) or 16.4 ft (5m)

#### 8mm Snap-On Straight Connector

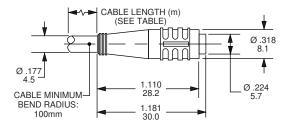

#### **8mm Threaded Straight Connector**

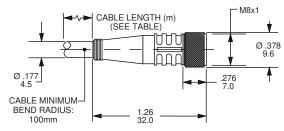


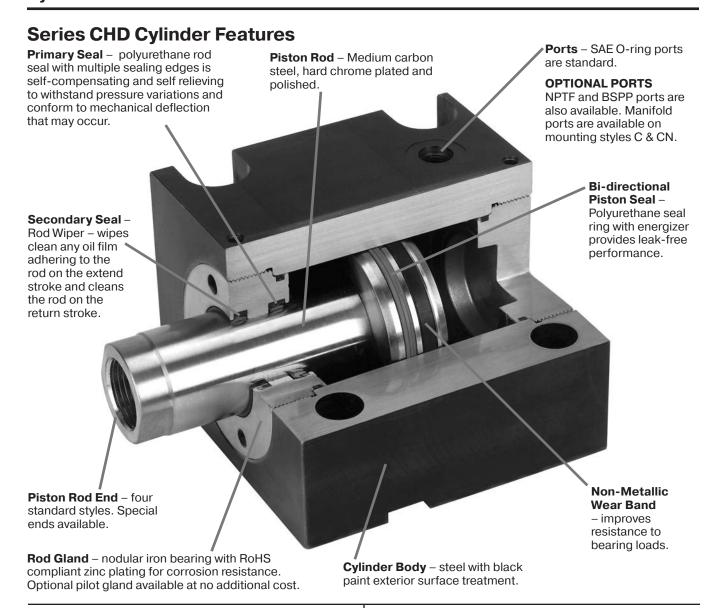


# CHD Compact Hydraulic Cylinders..

require less mounting space than conventional tie rod cylinders.

**Optional Pilot Gland...** offers added bearing area to increase service life and also improves alignment of cylinder and load.

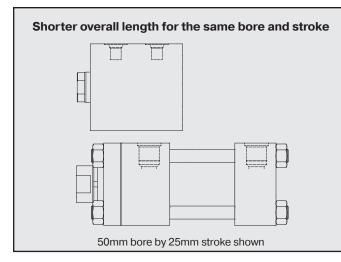

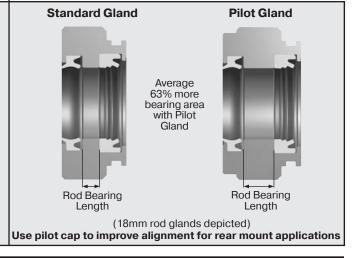

Series CHD

Operating Pressure (Bar)

#### **Theoretical Push and Pull Forces**

The cylinder output forces are derived from the formula:

> F = PxA10000

Where F = Force in kN.

P = Pressure at the cylinder in bar.

Operating Piston

Direction Area

A = Effective area of cylinder piston in square mm.

To determine the bore size for the application take the

## following steps Push and Pull Force in kN

Rod

Ø

**Bore** Ø

| Ø   | Ø     | Direction | (mm²) | 50   | 75   | 100  | 125  | 150  | 175  | 207  |
|---|-------|-----------|-------|------|------|------|------|------|------|------|
| 20  | 12    | Push      | 314   | 1.57 | 2.36 | 3.14 | 3.93 | 4.71 | 5.50 | 6.50 |
| 20  | 12    | Pull      | 201   | 1.01 | 1.51 | 2.01 | 2.51 | 3.02 | 3.52 | 4.16 |
| 25  | 14    | Push      | 491   | 2.45 | 3.68 | 4.91 | 6.14 | 7.36 | 8.59 | 10.2 |
| 25  | 14    | Pull      | 337   | 1.68 | 2.53 | 3.37 | 4.21 | 5.05 | 5.90 | 6.97 |
| 32  | 18    | Push      | 804   | 4.02 | 6.03 | 8.04 | 10.1 | 12.1 | 14.1 | 16.6 |
| 32  | 10    | Pull      | 550   | 2.75 | 4.12 | 5.50 | 6.87 | 8.25 | 9.62 | 11.4 |
| 40  | 00    | Push      | 1,257 | 6.28 | 9.42 | 12.6 | 15.7 | 18.8 | 22.0 | 26.0 |
| 40  | 22    | Pull      | 877   | 4.38 | 6.57 | 8.8  | 11.0 | 13.1 | 15.3 | 18.1 |
| 50  | 28    | Push      | 1,963 | 9.82 | 14.7 | 19.6 | 24.5 | 29.5 | 34.4 | 40.6 |
| 50  |       | Pull      | 1,348 | 6.74 | 10.1 | 13.5 | 16.8 | 20.2 | 23.6 | 27.9 |
| 63  | 36    | Push      | 3,117 | 15.6 | 23.4 | 31.2 | 39.0 | 46.8 | 54.6 | 64.5 |
| 03  | 30    | Pull      | 2,099 | 10.5 | 15.7 | 21.0 | 26.2 | 31.5 | 36.7 | 43.5 |
| 80  | 80 45 | Push      | 5,027 | 25.1 | 37.7 | 50.3 | 62.8 | 75.4 | 88.0 | 104  |
| 00  | 45    | Pull      | 3,436 | 17.2 | 25.8 | 34.4 | 43.0 | 51.5 | 60.1 | 71.1 |
| Pull 3,436   17.2   25.8   34.4   43.0   51.5   60.1   71.1 |       |           |       |      |      |      |      |      |      |      |

- 1. Select the Operating Pressure column closest to that desired.
- 2. In the same column, identify the force required to move the load (always rounding up). If the piston rod is in compression use the 'Push' row and if the piston rod is in tension use the 'Pull' row.
- 3. In the row to the left is the bore required.

If the cylinder envelope dimensions are too large for the application, increase the operating pressure to the maximum pressure in the table below, if possible, and repeat steps 1 - 3.

#### **Series CHD Pressure Rating**

| Bore<br>Ø | Maximum Working<br>Pressure in bar |
|-----------|------------------------------------|
| 20        | 207                                |
| 25        | 207                                |
| 32        | 207                                |
| 40        | 207                                |
| 50        | 207                                |
| 63        | 207                                |
| 80        | 207                                |

#### **Equivalents**

1 kN = 224.81 pounds force

1 bar = 14.50 psi

1 mm = .03937 inch

1 mm<sup>2</sup> = .00155 inch<sup>2</sup>

#### Cylinder Weights

To determine the weight of a Series CHD cylinder, first select the proper basic zero stroke weight for the mounting required, and then calculate the weight

Table A Single Rod End CHD Cylinder Weights in kg.

of the cylinder stroke and add the result to the basic weight. For extra rod extension, use piston rod weights per

mm in Table C.

Table C Piston rod weights in kg.

| Rod<br>Ø | Piston Rod<br>Weight per mm |
|----------|-----------------------------|
| 12       | 0.001                       |
| 14       | 0.001                       |
| 18       | 0.002                       |
| 22       | 0.003                       |
| 28       | 0.005                       |
| 36       | 0.008                       |
| 45       | 0.012                       |
|          |                             |

| Bore | Rod |       | Single Rod Cylinders |         |                   |              |                   |              |      |            |              |
|------|-----|-------|----------------------|---------|-------------------|--------------|-------------------|--------------|------|------------|--------------|
| Ø    | Ø   | Basic | Weigh                | t at Ze | ro Stroke         | Per          | Basic Weight      | Per          |      | Weight     | Per          |
|      |     | Т     | TN,<br>TR            | A, M    | AN, AR,<br>MN, MR | mm<br>Stroke | at Zero<br>Stroke | mm<br>Stroke |      | ero<br>oke | mm<br>Stroke |
|      |     |       |                      |         | ,                 |              | J, H              |              | С    | CN         |              |
| 20   | 12  | 0.57  | 0.58                 | 0.61    | 0.62              | 0.013        | 0.84              | 0.013        | -    | -          | -            |
| 25   | 14  | 0.80  | 0.81                 | 0.84    | 0.85              | 0.016        | 1.17              | 0.017        | 0.71 | 0.73       | 0.015        |
| 32   | 18  | 1.39  | 1.42                 | 1.45    | 1.48              | 0.024        | 1.92              | 0.025        | 1.41 | 1.43       | 0.026        |
| 40   | 22  | 1.87  | 1.90                 | 1.97    | 2.01              | 0.029        | 2.81              | 0.031        | 1.93 | 1.96       | 0.033        |
| 50   | 28  | 2.61  | 2.67                 | 2.79    | 2.85              | 0.036        | 4.20              | 0.038        | 2.82 | 2.88       | 0.044        |
| 63   | 36  | 4.11  | 4.20                 | 4.34    | 4.42              | 0.047        | 6.11              | 0.051        | 4.69 | 4.78       | 0.063        |
| 80   | 45  | 7.19  | 7.33                 | 7.49    | 7.62              | 0.067        | 10.7              | 0.072        | -    | -          | -            |

Table B Double Rod End CHD Cylinder Weights in kg

| Table | able b Double hou Elia Cho Cyllider Weights II kg. |                             |                      |                             |        |       |                             |        |      |                  |           |
|-------|--|-----------------------------|----------------------|-----------------------------|--------|-------|-----------------------------|--------|------|------------------|-----------|
| Bore  | Rod  |                             | Double Rod Cylinders |                             |        |       |                             |        |      |                  |           |
| Ø     | Ø  | Basic Weight at Zero Stroke |                      | Basic Weight at Zero Stroke |        | 1     | Basic Weight at Zero Stroke |        | l    | Weight<br>Stroke | Per<br>mm |
|       |  | Т                           | TN                   | A, M                        | AN, MN | 1     |                             | Stroke |      |                  | Stroke    |
|       |  |                             |                      |                             |        |       | J                           |        | С    | CN               |           |
| 20    | 12   | 0.60                        | 0.61                 | 0.64                        | 0.65   | 0.013 | 0.87                        | 0.014  | -    | -                | -         |
| 25    | 14   | 0.83                        | 0.85                 | 0.87                        | 0.89   | 0.017 | 1.21                        | 0.018  | 0.75 | 0.77             | 0.016     |
| 32    | 18   | 1.46                        | 1.48                 | 1.52                        | 1.54   | 0.026 | 1.98                        | 0.027  | 1.47 | 1.50             | 0.028     |
| 40    | 22   | 1.97                        | 2.01                 | 2.08                        | 2.11   | 0.032 | 2.92                        | 0.034  | 2.03 | 2.07             | 0.036     |
| 50    | 28   | 2.81                        | 2.87                 | 2.99                        | 3.05   | 0.041 | 4.40                        | 0.043  | 3.02 | 3.08             | 0.049     |
| 63    | 36   | 4.52                        | 4.61                 | 4.75                        | 4.83   | 0.055 | 6.53                        | 0.059  | 5.10 | 5.19             | 0.071     |
| 80    | 45   | 7.99                        | 8.12                 | 8.28                        | 8.42   | 0.080 | 11.5                        | 0.085  | -    | -                | -         |


#### **Equivalent**

1 kg = 2.2046 pounds



#### Series CHD

#### **Model Ordering Code for CHD**

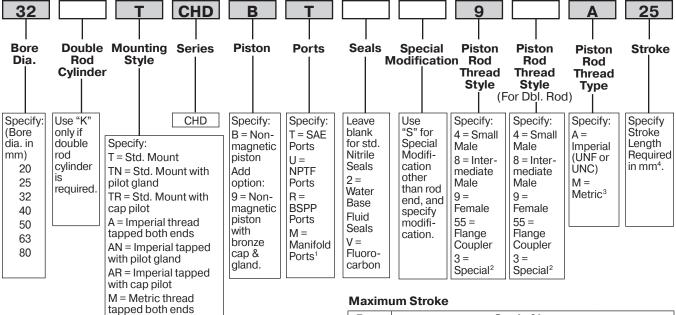

| Bore | Stro  |                              |   |  |
|------|---|------------------------------|---|--|
| Ø    | Mounting Styles T,<br>TN, TR, A, AN, AR,<br>M, MN, MR | Mounting<br>Styles<br>C & CN | Bolt-on<br>Mounting<br>Styles <sup>6</sup> J<br>& H |  |
| 20   | 50  | N/A                          | 50  |  |
| 25   | 60  | 50                           | 60  |  |
| 32   | 115   | 100                          | 100   |  |
| 40   | 115   | 100                          | 100   |  |
| 50   | 125   | 100                          | 100   |  |
| 63   | 115   | 100                          | 100   |  |
| 80   | 115   | N/A                          | 100   |  |

<sup>&</sup>lt;sup>4</sup> See Maximum Stroke Chart above.

Shaded boxes identify required model number fields.

pilot gland

Flange

Flange

MN = Metric tapped with pilot gland MR = Metric tapped with cap pilot C = Foot Mount CN = Foot Mount with

J = Head Rectangular

H = Cap Rectangular

#### **Standard Specifications**

- 13 Standard mounting styles
- Bore sizes 20mm to 80mm
- Piston Rod Diameter 12mm to 45mm
- Single and double rod construction available
- Strokes up to 100mm depending on bore size (see table above)
- Working pressure up to 207 bar
- Temperature range -23°C to +121°C (depending on seal class)
- Reference ISO 16656: 2004

| Seal Classes                                       | Typical Fluids  | Temperature Range  |
|--|---|--|
| 1 – Standard<br>Nitrile & Polyurethane             | Hydraulic Oil, MIL-H-5606 Oil   | -23°C (-10°F) to +100°C (+212°F)   |
| 2 – Optional<br>Water Base Fluid Seal              | Water-in-Oil Emulsion – Houghto-Safe 271,<br>620, 5040. Mobil Pyrogard D. Shell Irus 905.<br>Ucon Hydrolube J-4 | -23°C (-10°F) to +121°C (+250°F)   |
| 5 – Optional (at extra cost)<br>Fluorocarbon Seals | High Temperature  | -23°C (-10°F) to +121°C (+250°F) Class 5 seals may be operated up to +204°C (+400°F) with reduced service life |

Note: Class 5 seals are not suitable for use with Skydrol fluid, but can be used with hydraulic oil if desired.



<sup>&</sup>lt;sup>5</sup> Intermediate strokes in 1mm increments are available.


<sup>&</sup>lt;sup>6</sup> Longer strokes (up to maximum lengths for Mounting Styles T, TN, TR, A, AN, AR, M, MN & MR) are available at increased manufacturing lead times. Contact the factory.


<sup>&</sup>lt;sup>1</sup> Manifold ports are only available on Foot Mounting Styles C & CN. See Mounting Styles C & CN Dimension Pages for minimum stroke with Manifold Ports.

<sup>&</sup>lt;sup>2</sup> To order thread style 3, specify "3" and give the desired dimensions for KK, A, and W (or WP depending on mounting) or furnish a dimensioned sketch.

<sup>&</sup>lt;sup>3</sup> Always use M for rod style 55.

#### Style T Through Bolt Mount - Single Rod End - 20mm to 80mm Bore Size



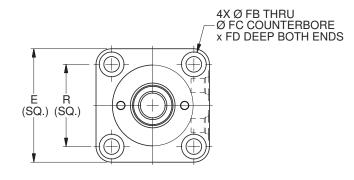

#### T Mount Single Rod End – Envelope and Mounting Dimensions


| Bore | Е   |     | EE   |       | EK | EL   | FB   | FC   | FD   | R  | W  | Add S | troke |
|------|-----|-----|------|-------|----|------|------|------|------|----|----|-------|-------|
| Ø    |     | SAE | NPTF | BSP   |    |      | Ø    | Ø    |      |    |    | LB    | ZJ    |
| 20   | 44  | #2¹ | 1/8  | G-1/8 | 6  | 16.5 | 5.5  | 9.5  | 5.4  | 30 | 8  | 43    | 51    |
| 25   | 50  | #2¹ | 1/8  | G-1/8 | 8  | 17.5 | 5.5  | 9.5  | 5.4  | 36 | 8  | 45    | 53    |
| 32   | 62  | #4  | 1/4  | G-1/4 | 11 | 20.5 | 7    | 11   | 6.5  | 47 | 10 | 51    | 61    |
| 40   | 70  | #4  | 1/4  | G-1/4 | 12 | 21   | 9    | 14   | 8.6  | 52 | 10 | 55    | 65    |
| 50   | 80  | #4  | 1/4  | G-1/4 | 14 | 22.5 | 11   | 17.5 | 10.8 | 58 | 11 | 60    | 71    |
| 63   | 94  | #4  | 1/4  | G-1/4 | 17 | 26   | 13.5 | 20   | 13   | 69 | 13 | 67    | 80    |
| 80   | 114 | #6  | 3/8  | G-3/8 | 20 | 29.5 | 16   | 23   | 15.2 | 86 | 17 | 78    | 95    |

¹ Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### T Mount Single Rod End - Rod Dimensions

| Bore | ММ  |          |    |          |    |          | Roc | l Thread |    |          |    |    |       |     |    |     | Exter |     |
|------|-----|----------|----|----------|----|----------|-----|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | М  | Style 4  | М  | Style 9  | 9A  | Style    | 4A | Style    | 8A |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | Α  | KK       | Α  | KK       | Α   | KK       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10  | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12  | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15  | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20  | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24  | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30  | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35  | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |

#### **Rod End Dimensions**

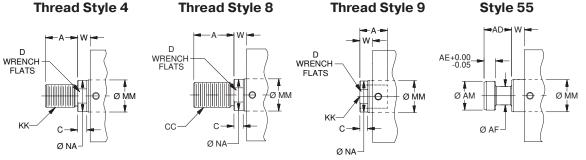

#### "Special" Thread Style 3


Special thread, extension, rod eye, blank, etc. are also available.

To order, specify "Style 3" and give desired dimensions for KK, A, & W. If otherwise special furnish dimensional sketch.



#### **Series CHD**

#### Style T Through Bolt Mount – Double Rod End – 20mm to 80mm Bore Size

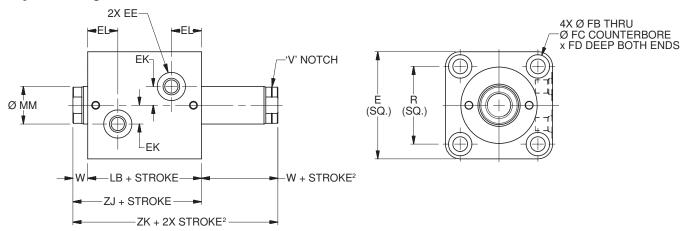

#### T Mount Double Rod End – Envelope and Mounting Dimensions


| Bore | E   |     | EE   |       | EK | EL   | FB   | FC   | FD   | R  | W² | Add S | Stroke | Add 2X Stroke   |
|------|-----|-----|------|-------|----|------|------|------|------|----|----|-------|--------|-----------------|
| Ø    |     | SAE | NPTF | BSP   |    |      | Ø    | Ø    |      |    |    | LB    | ZJ     | ZK <sup>2</sup> |
| 20   | 44  | #2¹ | 1/8  | G-1/8 | 6  | 16.5 | 5.5  | 9.5  | 5.4  | 30 | 8  | 43    | 51     | 59              |
| 25   | 50  | #2¹ | 1/8  | G-1/8 | 8  | 17.5 | 5.5  | 9.5  | 5.4  | 36 | 8  | 45    | 53     | 61              |
| 32   | 62  | #4  | 1/4  | G-1/4 | 11 | 20.5 | 7    | 11   | 6.5  | 47 | 10 | 51    | 61     | 71              |
| 40   | 70  | #4  | 1/4  | G-1/4 | 12 | 21   | 9    | 14   | 8.6  | 52 | 10 | 55    | 65     | 75              |
| 50   | 80  | #4  | 1/4  | G-1/4 | 14 | 22.5 | 11   | 17.5 | 10.8 | 58 | 11 | 60    | 71     | 82              |
| 63   | 94  | #4  | 1/4  | G-1/4 | 17 | 26   | 13.5 | 20   | 13   | 69 | 13 | 67    | 80     | 93              |
| 80   | 114 | #6  | 3/8  | G-3/8 | 20 | 29.5 | 16   | 23   | 15.2 | 86 | 17 | 78    | 95     | 112             |

<sup>&</sup>lt;sup>1</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### T Mount Double Rod End - Rod Dimensions

| Bore | ММ  |          |    |          |    |          | R               | lod End  |    |          |    |    |       |     |    |     | Exter |     |
|------|-----|----------|----|----------|----|----------|-----------------|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | M² | Style 4  | М  | Style 9  | )A <sup>2</sup> | Style 4  | 4A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | Α  | KK       | Α  | KK       | Α               | кк       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10              | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12              | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15              | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20              | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24              | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30              | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35              | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |

#### **Rod End Dimensions**

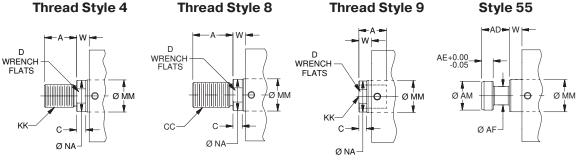

# "Special" Thread Style 3

Special thread, extension, rod eye, blank, etc. are also available.


To order, specify "Style 3" and give desired dimensions for KK, A, & W. If otherwise special furnish dimensional sketch.



<sup>&</sup>lt;sup>2</sup> Minimum 'W + Stroke' on V notch rod side may apply. See minimum rod extension page for details.

**Series CHD** 

# Styles TN and TR Through Bolt Mount with Pilot Gland or Pilot Cap –

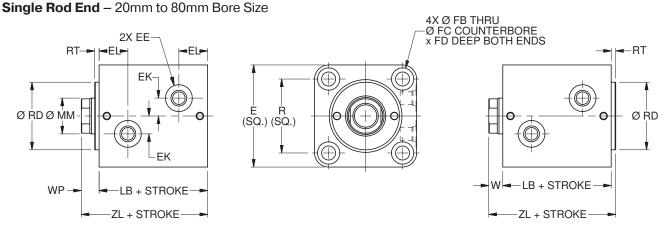

**Style TN Pilot Gland Mount** 

Style TR Pilot Cap Mount

#### TN and TR Mount Single Rod End - Envelope and Mounting Dimensions


|      |     |     | •    |       |    | _    |      |      | _    |    |      |    |    |    |       |        |
|------|-----|-----|------|-------|----|------|------|------|------|----|------|----|----|----|-------|--------|
| Bore | E   |     | EE   |       | EK | EL   | FB   | FC   | FD   | R  | RD Ø | RT | W  | WP | Add S | Stroke |
| Ø    |     | SAE | NPTF | BSP   |    |      | Ø    | Ø    |      |    | f9   |    |    |    | LB    | ZL     |
| 20   | 44  | #2¹ | 1/8  | G-1/8 | 6  | 16.5 | 5.5  | 9.5  | 5.4  | 30 | 24   | 3  | 8  | 11 | 43    | 54     |
| 25   | 50  | #21 | 1/8  | G-1/8 | 8  | 17.5 | 5.5  | 9.5  | 5.4  | 36 | 27   | 3  | 8  | 11 | 45    | 56     |
| 32   | 62  | #4  | 1/4  | G-1/4 | 11 | 20.5 | 7    | 11   | 6.5  | 47 | 36   | 3  | 10 | 13 | 51    | 64     |
| 40   | 70  | #4  | 1/4  | G-1/4 | 12 | 21   | 9    | 14   | 8.6  | 52 | 43   | 3  | 10 | 13 | 55    | 68     |
| 50   | 80  | #4  | 1/4  | G-1/4 | 14 | 22.5 | 11   | 17.5 | 10.8 | 58 | 53   | 3  | 11 | 14 | 60    | 74     |
| 63   | 94  | #4  | 1/4  | G-1/4 | 17 | 26   | 13.5 | 20   | 13   | 69 | 66   | 3  | 13 | 16 | 67    | 83     |
| 80   | 114 | #6  | 3/8  | G-3/8 | 20 | 29.5 | 16   | 23   | 15.2 | 86 | 83   | 3  | 17 | 20 | 78    | 98     |

¹ Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### TN and TR Mount Single Rod End – Rod Dimensions

| Bore | ММ  |          |    |          |    |          | F          | lod End  |    |          |    |    |       |     |    |     | Exter |     |
|------|-----|----------|----|----------|----|----------|------------|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | М  | Style 4  | М  | Style 9  | 9 <b>A</b> | Style 4  | 4A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | Α  | KK       | Α  | кк       | Α          | KK       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10         | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12         | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15         | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20         | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24         | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30         | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35         | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |

#### **Rod End Dimensions**

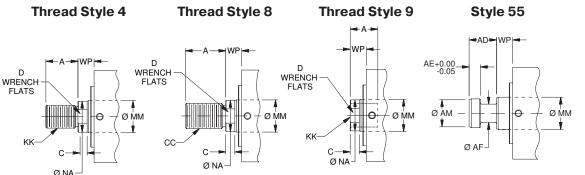


#### "Special" Thread Style 3

Special thread, extension, rod eye, blank, etc. are also available. To order, specify "Style 3" and give desired

"Style 3" and give desired dimensions for KK, A, & W (TR Mount) or WP (TN Mount) If otherwise special furnish dimensional sketch.



#### Style TN Through Bolt Mount with Pilot Gland – Double Rod End – 20mm to 80mm Bore Size

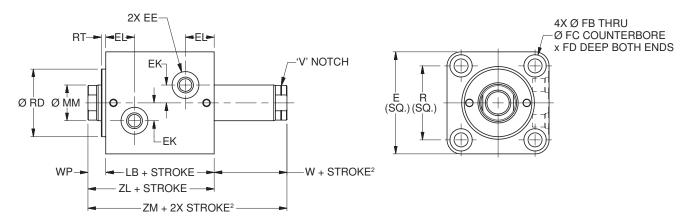


#### **TN Mount Double Rod End – Envelope and Mounting Dimensions**

| Bore | E   |     | EE   |       | EK | EL   | FB   | FC   | FD   | R  | RD Ø | RT | W² | WP | Add S | troke | Add 2X Stroke   |
|------|-----|-----|------|-------|----|------|------|------|------|----|------|----|----|----|-------|-------|-----------------|
| Ø    |     | SAE | NPTF | BSP   |    |      | Ø    | Ø    |      |    | f9   |    |    |    | LB    | ZL    | ZM <sup>2</sup> |
| 20   | 44  | #2¹ | 1/8  | G-1/8 | 6  | 16.5 | 5.5  | 9.5  | 5.4  | 30 | 24   | 3  | 8  | 11 | 43    | 54    | 62              |
| 25   | 50  | #2¹ | 1/8  | G-1/8 | 8  | 17.5 | 5.5  | 9.5  | 5.4  | 36 | 27   | 3  | 8  | 11 | 45    | 56    | 64              |
| 32   | 62  | #4  | 1/4  | G-1/4 | 11 | 20.5 | 7    | 11   | 6.5  | 47 | 36   | 3  | 10 | 13 | 51    | 64    | 74              |
| 40   | 70  | #4  | 1/4  | G-1/4 | 12 | 21   | 9    | 14   | 8.6  | 52 | 43   | 3  | 10 | 13 | 55    | 68    | 78              |
| 50   | 80  | #4  | 1/4  | G-1/4 | 14 | 22.5 | 11   | 17.5 | 10.8 | 58 | 53   | 3  | 11 | 14 | 60    | 74    | 85              |
| 63   | 94  | #4  | 1/4  | G-1/4 | 17 | 26   | 13.5 | 20   | 13   | 69 | 66   | 3  | 13 | 16 | 67    | 83    | 96              |
| 80   | 114 | #6  | 3/8  | G-3/8 | 20 | 29.5 | 16   | 23   | 15.2 | 86 | 83   | 3  | 17 | 20 | 78    | 98    | 115             |

<sup>&</sup>lt;sup>1</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### **TN Mount Double Rod End - Rod Dimensions**


| Bore | ММ  |          |                |          |    |          | R               | lod End  |    |          |    |    |       |     |    |     | Exter |     |
|------|-----|----------|----------------|----------|----|----------|-----------------|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | M <sup>2</sup> | Style 4  | М  | Style 9  | )A <sup>2</sup> | Style 4  | 1A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons |
|      | ~   | KK       | Α              | KK       | Α  | KK       | Α               | KK       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 20   | 12  | M8x1.25  | 10             | M8x1     | 14 | 5/16-24  | 10              | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12             | M10x1.25 | 16 | 3/8-24   | 12              | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15             | M12x1.25 | 18 | 7/16-20  | 15              | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20             | M16x1.5  | 22 | 5/8-18   | 20              | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24             | M20x1.5  | 28 | 3/4-16   | 24              | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30             | M27x2    | 36 | 1-14     | 30              | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35             | M33x2    | 45 | 1 1/4-12 | 35              | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |

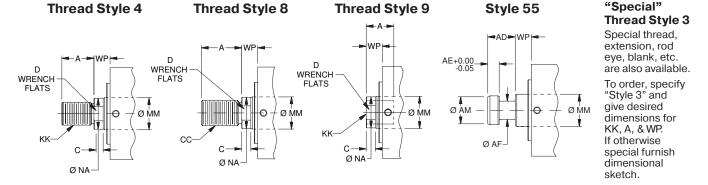




<sup>&</sup>lt;sup>2</sup> Minimum 'W + Stroke' on V notch rod side may apply. See minimum rod extension page for details.

#### Style A Imperial Tapped Both Ends Mount - Single Rod End - 20mm to 80mm Bore Size



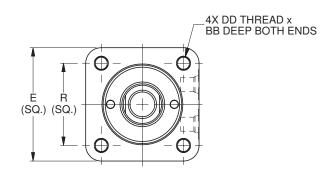

#### A Mount Single Rod End – Envelope and Mounting Dimensions


|      | _    |                  | -   |      | •   |       |    |      |    |    |       |       |
|------|------|------------------|-----|------|-----|-------|----|------|----|----|-------|-------|
| Bore | ВВ   | DD               | E   |      | EE  |       | EK | EL   | R  | w  | Add S | troke |
| Ø    |      |                  |     | SAE  | NPT | BSP   |    |      |    |    | LB    | ZJ    |
| 20   | 10.1 | 10-32 UNF - 2B   | 44  | # 2¹ | 1/8 | G-1/8 | 6  | 16.5 | 30 | 8  | 43    | 51    |
| 25   | 10.5 | 10-32 UNF - 2B   | 50  | # 21 | 1/8 | G-1/8 | 8  | 17.5 | 36 | 8  | 45    | 53    |
| 32   | 12.5 | 1/4-28 UNF - 2B  | 62  | #4   | 1/4 | G-1/4 | 11 | 20.5 | 47 | 10 | 51    | 61    |
| 40   | 16.6 | 5/16-24 UNF - 2B | 70  | #4   | 1/4 | G-1/4 | 12 | 21   | 52 | 10 | 55    | 65    |
| 50   | 20.8 | 3/8-24 UNF - 2B  | 80  | #4   | 1/4 | G-1/4 | 14 | 22.5 | 58 | 11 | 60    | 71    |
| 63   | 24.3 | 1/2-20 UNF - 2B  | 94  | #4   | 1/4 | G-1/4 | 17 | 26   | 69 | 13 | 67    | 80    |
| 80   | 28.8 | 5/8-18 UNF - 2B  | 114 | #6   | 3/8 | G-3/8 | 20 | 29.5 | 86 | 17 | 78    | 95    |

<sup>&</sup>lt;sup>1</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### A Mount Single Rod End – Rod Dimensions

| Bore | ММ  |          |    |          |    |          | R          | od End   |    |          |    |    |       |     |    | Rod | Exter | nsion |
|------|-----|----------|----|----------|----|----------|------------|----------|----|----------|----|----|-------|-----|----|-----|-------|-------|
| Ø    | Rod | Style 9  | М  | Style 4  | М  | Style    | 9 <b>A</b> | Style 4  | 4A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons   |
|      |     | KK       | Α  | KK       | Α  | кк       | Α          | KK       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA    |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10         | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11    |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12         | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13    |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15         | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17    |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20         | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21    |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24         | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27    |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30         | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35    |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35         | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43    |

#### **Rod End Dimensions**

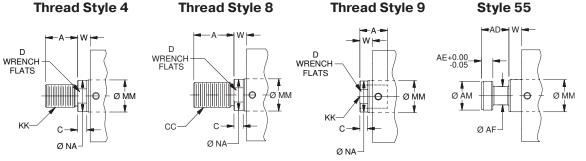


# "Special" Thread Style 3

Special thread, extension, rod eye, blank, etc. are also available.

To order, specify "Style 3" and give desired dimensions for KK, A, & W. If otherwise special furnish dimensional sketch.



#### Style A Imperial Tapped Both Ends Mount - Double Rod End - 20mm to 80mm Bore Size

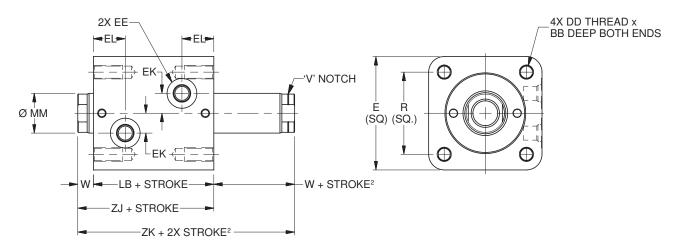


#### A Mount Double Rod End – Envelope and Mounting Dimensions

| Bore | ВВ   | DD               | E   |      | EE  |       | EK | EL   | R  | W² | Add S | troke | Add 2X Stroke   |
|------|------|------------------|-----|------|-----|-------|----|------|----|----|-------|-------|-----------------|
| Ø    |      |                  |     | SAE  | NPT | BSP   |    |      |    |    | LB    | ZJ    | ZK <sup>2</sup> |
| 20   | 10.1 | 10-32 UNF - 2B   | 44  | # 2¹ | 1/8 | G-1/8 | 6  | 16.5 | 30 | 8  | 43    | 51    | 59              |
| 25   | 10.5 | 10-32 UNF - 2B   | 50  | # 21 | 1/8 | G-1/8 | 8  | 17.5 | 36 | 8  | 45    | 53    | 61              |
| 32   | 12.5 | 1/4-28 UNF - 2B  | 62  | #4   | 1/4 | G-1/4 | 11 | 20.5 | 47 | 10 | 51    | 61    | 71              |
| 40   | 16.6 | 5/16-24 UNF - 2B | 70  | #4   | 1/4 | G-1/4 | 12 | 21   | 52 | 10 | 55    | 65    | 75              |
| 50   | 20.8 | 3/8-24 UNF - 2B  | 80  | #4   | 1/4 | G-1/4 | 14 | 22.5 | 58 | 11 | 60    | 71    | 82              |
| 63   | 24.3 | 1/2-20 UNF - 2B  | 94  | #4   | 1/4 | G-1/4 | 17 | 26   | 69 | 13 | 67    | 80    | 93              |
| 80   | 28.8 | 5/8-18 UNF - 2B  | 114 | #6   | 3/8 | G-3/8 | 20 | 29.5 | 86 | 17 | 78    | 95    | 112             |

<sup>&</sup>lt;sup>1</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### A Mount Double Rod End - Rod Dimensions


| Bore | ММ  |          |                |          |    |          | F            | od End   |    |          |    |    |       |     |    |     | Exten  |     |
|------|-----|----------|----------------|----------|----|----------|--------------|----------|----|----------|----|----|-------|-----|----|-----|--------|-----|
| Ø    | Rod | Style 9  | M <sup>2</sup> | Style 4  | М  | Style    | 9 <b>A</b> ² | Style    | 4A | Style    | 8A |    | Style | 55M |    | Din | nensio | ons |
|      |     | KK       |                |          |    | KK       | Α            | KK       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D      | NA  |
| 20   | 12  | M8x1.25  | 10             | M8x1     | 14 | 5/16-24  | 10           | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10     | 11  |
| 25   | 14  | M10x1.5  | 12             | M10x1.25 | 16 | 3/8-24   | 12           | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12     | 13  |
| 32   | 18  | M12x1.75 | 15             | M12x1.25 | 18 | 7/16-20  | 15           | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15     | 17  |
| 40   | 22  | M16x2    | 20             | M16x1.5  | 22 | 5/8-18   | 20           | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19     | 21  |
| 50   | 28  | M20x2.5  | 24             | M20x1.5  | 28 | 3/4-16   | 24           | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24     | 27  |
| 63   | 36  | M27x3    | 30             | M27x2    | 36 | 1-14     | 30           | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32     | 35  |
| 80   | 45  | M33x3.5  | 35             | M33x2    | 45 | 1 1/4-12 | 35           | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39     | 43  |

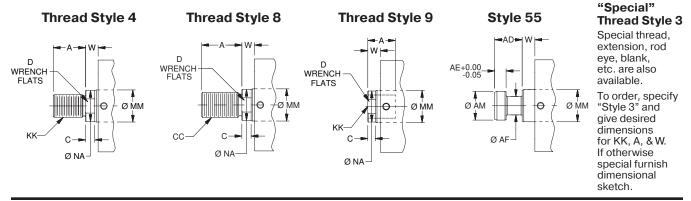



<sup>&</sup>lt;sup>2</sup> Minimum 'W + Stroke' on V notch rod side may apply. See minimum rod extension page for details.

# Styles AN and AR Imperial Tapped Both Ends Mounts with Pilot Gland or Pilot Cap – Single Rod End – 20mm to 80mm Bore Size

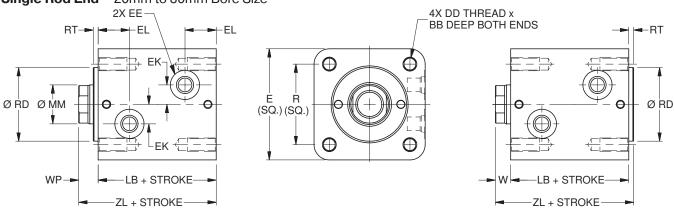

Style AN Imperial Tapped Both Ends Mount with Pilot Gland

Style AR Imperial Tapped Both Ends Mount with Pilot Cap

#### AN and AR Mount Single Rod End - Envelope and Mounting Dimensions


| Bore | ВВ   | DD               | E   |      | EE  |       | EK | EL   | R  | RD Ø | RT | w  | WP | Add S | troke |
|------|------|------------------|-----|------|-----|-------|----|------|----|------|----|----|----|-------|-------|
| Ø    |      |                  |     | SAE  | NPT | BSP   |    |      |    | f9   |    |    |    | LB    | ZL    |
| 20   | 10.1 | 10-32 UNF - 2B   | 44  | # 2¹ | 1/8 | G-1/8 | 6  | 16.5 | 30 | 24   | 3  | 8  | 11 | 43    | 54    |
| 25   | 10.5 | 10-32 UNF - 2B   | 50  | # 2¹ | 1/8 | G-1/8 | 8  | 17.5 | 36 | 27   | 3  | 8  | 11 | 45    | 56    |
| 32   | 12.5 | 1/4-28 UNF - 2B  | 62  | # 4  | 1/4 | G-1/4 | 11 | 20.5 | 47 | 36   | 3  | 10 | 13 | 51    | 64    |
| 40   | 16.6 | 5/16-24 UNF - 2B | 70  | # 4  | 1/4 | G-1/4 | 12 | 21   | 52 | 43   | 3  | 10 | 13 | 55    | 68    |
| 50   | 20.8 | 3/8-24 UNF - 2B  | 80  | #4   | 1/4 | G-1/4 | 14 | 22.5 | 58 | 53   | 3  | 11 | 14 | 60    | 74    |
| 63   | 24.3 | 1/2-20 UNF - 2B  | 94  | #4   | 1/4 | G-1/4 | 17 | 26   | 69 | 66   | 3  | 13 | 16 | 67    | 83    |
| 80   | 28.8 | 5/8-18 UNF - 2B  | 114 | #6   | 3/8 | G-3/8 | 20 | 29.5 | 86 | 83   | 3  | 17 | 20 | 78    | 98    |

¹ Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### AN and AR Mount Single Rod End - Rod Dimensions

| Bore | ММ  |          |    |          |    |          | R  | od End   |    |          |    |    |       |     |    | Rod Extension |            |    |  |
|------|-----|----------|----|----------|----|----------|----|----------|----|----------|----|----|-------|-----|----|---------------|------------|----|--|
| Ø    | Rod | Style 9  | М  | Style 4  | М  | Style    | 9A | Style 4  | 4A | Style    | ВА |    | Style | 55M |    | Din           | Dimensions |    |  |
|      |     | KK       | Α  | KK       |    |          | Α  | KK       | Α  | СС       | Α  | AD | AE    | AF  | АМ | С             | D          | NA |  |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10 | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6             | 10         | 11 |  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12 | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6             | 12         | 13 |  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15 | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8             | 15         | 17 |  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20 | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8             | 19         | 21 |  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24 | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9             | 24         | 27 |  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30 | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11            | 32         | 35 |  |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35 | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13            | 39         | 43 |  |

#### **Rod End Dimensions**

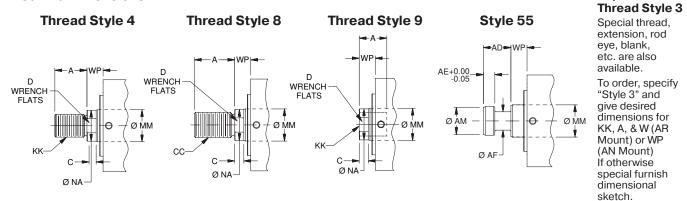




"Special"

#### **Series CHD**

#### Style AN Imperial Tapped Both Ends Mount with Pilot Gland - Double Rod End - 20mm to 80mm Bore

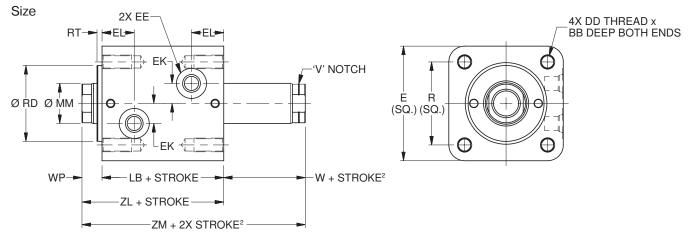

#### AN Mount Double Rod End – Envelope and Mounting Dimensions


| Bore | ВВ   | DD               | E   |      | EE   |       | EK | EL   | R  | RD Ø | RT | W <sup>2</sup> | WP | Add S | troke | Add 2X Stroke   |
|------|------|------------------|-----|------|------|-------|----|------|----|------|----|----------------|----|-------|-------|-----------------|
| Ø    |      |                  |     | SAE  | NPTF | BSP   |    |      |    | f9   |    |                |    | LB    | ZL    | ZM <sup>2</sup> |
| 20   | 10.1 | 10-32 UNF - 2B   | 44  | # 2¹ | 1/8  | G-1/8 | 6  | 16.5 | 30 | 24   | 3  | 8              | 11 | 43    | 54    | 62              |
| 25   | 10.5 | 10-32 UNF - 2B   | 50  | # 2¹ | 1/8  | G-1/8 | 8  | 17.5 | 36 | 27   | 3  | 8              | 11 | 45    | 56    | 64              |
| 32   | 12.5 | 1/4-28 UNF - 2B  | 62  | #4   | 1/4  | G-1/4 | 11 | 20.5 | 47 | 36   | 3  | 10             | 13 | 51    | 64    | 74              |
| 40   | 16.6 | 5/16-24 UNF - 2B | 70  | #4   | 1/4  | G-1/4 | 12 | 21   | 52 | 43   | 3  | 10             | 13 | 55    | 68    | 78              |
| 50   | 20.8 | 3/8-24 UNF - 2B  | 80  | #4   | 1/4  | G-1/4 | 14 | 22.5 | 58 | 53   | 3  | 11             | 14 | 60    | 74    | 85              |
| 63   | 24.3 | 1/2-20 UNF - 2B  | 94  | #4   | 1/4  | G-1/4 | 17 | 26   | 69 | 66   | 3  | 13             | 16 | 67    | 83    | 96              |
| 80   | 28.8 | 5/8-18 UNF - 2B  | 114 | #6   | 3/8  | G-3/8 | 20 | 29.5 | 86 | 83   | 3  | 17             | 20 | 78    | 98    | 115             |

<sup>&</sup>lt;sup>1</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### **AN Mount Double Rod End – Rod Dimensions**

| Bore | ММ  |          |    |          |    |          | R   | od End   |    |          |    |    |       |     |    |     | Exter | 1   |
|------|-----|----------|----|----------|----|----------|-----|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | M² | Style 4  | М  | Style 9  | )A² | Style 4  | 1A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | Α  | KK       |    |          | Α   | кк       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10  | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12  | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15  | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20  | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24  | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30  | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35  | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |

#### **Rod End Dimensions**

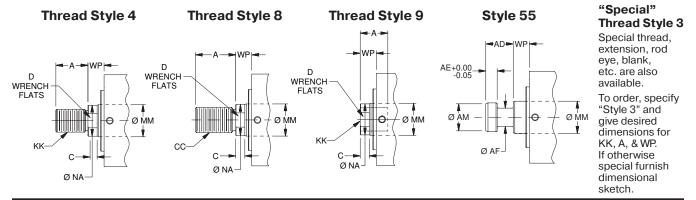





32

<sup>&</sup>lt;sup>2</sup> Minimum 'W + Stroke' on V notch rod side may apply. See minimum rod extension page for details.

#### Style M Metric Tapped Both Ends Mount - Single Rod End - 20mm to 80mm Bore Size



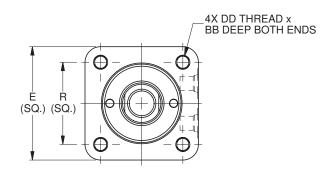

#### M Mount Single Rod End – Envelope and Mounting Dimensions


|      | •    |               | _   |      | _   |       |    |      |    |    |       |       |
|------|------|---------------|-----|------|-----|-------|----|------|----|----|-------|-------|
| Bore | ВВ   | DD            | E   |      | EE  |       | EK | EL   | R  | w  | Add S | troke |
| Ø    |      |               |     | SAE  | NPT | BSP   |    |      |    |    | LB    | ZJ    |
| 20   | 10   | M5x0.8 - 6H   | 44  | # 21 | 1/8 | G-1/8 | 6  | 16.5 | 30 | 8  | 43    | 51    |
| 25   | 10.4 | M5x0.8 - 6H   | 50  | # 21 | 1/8 | G-1/8 | 8  | 17.5 | 36 | 8  | 45    | 53    |
| 32   | 12.5 | M6x1 - 6H     | 62  | #4   | 1/4 | G-1/4 | 11 | 20.5 | 47 | 10 | 51    | 61    |
| 40   | 16.6 | M8x1.25 - 6H  | 70  | #4   | 1/4 | G-1/4 | 12 | 21   | 52 | 10 | 55    | 65    |
| 50   | 20.7 | M10x1.5 - 6H  | 80  | #4   | 1/4 | G-1/4 | 14 | 22.5 | 58 | 11 | 60    | 71    |
| 63   | 24.9 | M12x1.75 - 6H | 94  | #4   | 1/4 | G-1/4 | 17 | 26   | 69 | 13 | 67    | 80    |
| 80   | 29.0 | M14x2 - 6H    | 114 | #6   | 3/8 | G-3/8 | 20 | 29.5 | 86 | 17 | 78    | 95    |

<sup>&</sup>lt;sup>1</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### M Mount Single Rod End - Rod Dimensions

| Bore | ММ  |          |    |          |    |          | R          | od End   |    |          |    |    |       |     |    |     | Exter |     |
|------|-----|----------|----|----------|----|----------|------------|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | М  | Style 4  | М  | Style 9  | 9 <b>A</b> | Style 4  | 4A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | Α  | KK       | Α  | KK       | Α          | KK       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10         | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12         | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15         | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20         | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24         | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30         | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35         | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |

#### **Rod End Dimensions**

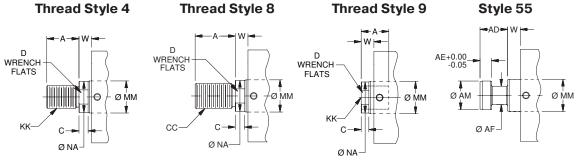


#### "Special" Thread Style 3

Special thread, extension, rod eye, blank, etc. are also available.

To order, specify "Style 3" and give desired dimensions for KK, A, & W. If otherwise special furnish dimensional sketch.



#### Style M Metric Tapped Both Ends Mount - Double Rod End - 20mm to 80mm Bore Size

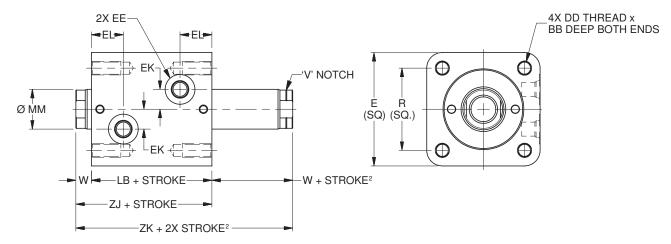

#### M Mount Double Rod End – Envelope and Mounting Dimensions


| Bore | ВВ   | DD            | Е   |      | EE  |       | EK | EL   | R  | W <sup>2</sup> | Add S | troke | Add 2X Stroke   |
|------|------|---------------|-----|------|-----|-------|----|------|----|----------------|-------|-------|-----------------|
|      |      |               |     | SAE  | NPT | BSP   |    |      |    |                | LB    | ZJ    | ZK <sup>2</sup> |
| 20   | 10   | M5x0.8 - 6H   | 44  | # 2¹ | 1/8 | G-1/8 | 6  | 16.5 | 30 | 8              | 43    | 51    | 59              |
| 25   | 10.4 | M5x0.8 - 6H   | 50  | # 2¹ | 1/8 | G-1/8 | 8  | 17.5 | 36 | 8              | 45    | 53    | 61              |
| 32   | 12.5 | M6x1 - 6H     | 62  | #4   | 1/4 | G-1/4 | 11 | 20.5 | 47 | 10             | 51    | 61    | 71              |
| 40   | 16.6 | M8x1.25 - 6H  | 70  | #4   | 1/4 | G-1/4 | 12 | 21   | 52 | 10             | 55    | 65    | 75              |
| 50   | 20.7 | M10x1.5 - 6H  | 80  | #4   | 1/4 | G-1/4 | 14 | 22.5 | 58 | 11             | 60    | 71    | 82              |
| 63   | 24.9 | M12x1.75 - 6H | 94  | # 4  | 1/4 | G-1/4 | 17 | 26   | 69 | 13             | 67    | 80    | 93              |
| 80   | 29.0 | M14x2 - 6H    | 114 | #6   | 3/8 | G-3/8 | 20 | 29.5 | 86 | 17             | 78    | 95    | 112             |

<sup>&</sup>lt;sup>1</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### **M Mount Double Rod End - Rod Dimensions**

| Bore | ММ  |          |                |          |    |          | R            | od End   |    |          |    |    |       |     |    |        | Exten |    |
|------|-----|----------|----------------|----------|----|----------|--------------|----------|----|----------|----|----|-------|-----|----|--------|-------|----|
| Ø    | Rod | Style 9  | M <sup>2</sup> | Style 4  | М  | Style 9  | 9 <b>A</b> ² | Style    | 4A | Style    | 8A |    | Style | 55M |    | Dimens |       |    |
|      |     | KK       | Α              | KK       | Α  | KK       | Α            | KK       | Α  | СС       | Α  | AD | AE    | AF  | AM | С      | D     | NA |
| 20   | 12  | M8x1.25  | 10             | M8x1     | 14 | 5/16-24  | 10           | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6      | 10    | 11 |
| 25   | 14  | M10x1.5  | 12             | M10x1.25 | 16 | 3/8-24   | 12           | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6      | 12    | 13 |
| 32   | 18  | M12x1.75 | 15             | M12x1.25 | 18 | 7/16-20  | 15           | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8      | 15    | 17 |
| 40   | 22  | M16x2    | 20             | M16x1.5  | 22 | 5/8-18   | 20           | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8      | 19    | 21 |
| 50   | 28  | M20x2.5  | 24             | M20x1.5  | 28 | 3/4-16   | 24           | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9      | 24    | 27 |
| 63   | 36  | M27x3    | 30             | M27x2    | 36 | 1-14     | 30           | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11     | 32    | 35 |
| 80   | 45  | M33x3.5  | 35             | M33x2    | 45 | 1 1/4-12 | 35           | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13     | 39    | 43 |

#### **Rod End Dimensions**

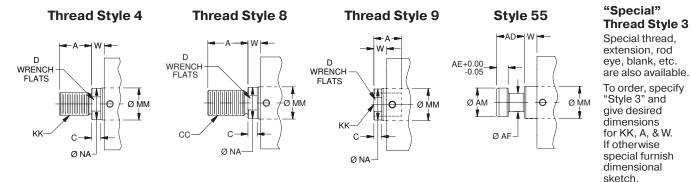




#### Schrader bellows

<sup>&</sup>lt;sup>2</sup> Minimum 'W + Stroke' on V notch rod side may apply. See minimum rod extension page for details.

MN and MR Mounts – Single Rod End

## Styles MN and MR Metric Tapped Both Ends Mounts with Pilot Gland or Pilot Cap – Single Rod End – 20mm to 80mm Bore Size

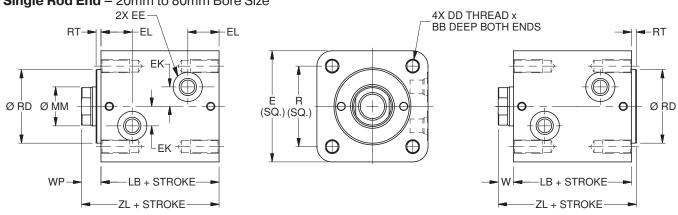

Style MN Metric Tapped Both Ends Mount with Pilot Gland

Style MR Metric Tapped Both Ends Mount with Pilot Cap

#### MN and MR Mount Single Rod End – Envelope and Mounting Dimensions


| Bore | ВВ   | DD            | E   |      | EE  |       | EK | EL   | R  | RDØ | RT | w  | WP | Add S | Stroke |
|------|------|---------------|-----|------|-----|-------|----|------|----|-----|----|----|----|-------|--------|
|      |      |               |     | SAE  | NPT | BSP   |    |      |    | f9  |    |    |    | LB    | ZL     |
| 20   | 10   | M5x0.8 - 6H   | 44  | # 2¹ | 1/8 | G-1/8 | 6  | 16.5 | 30 | 24  | 3  | 8  | 11 | 43    | 54     |
| 25   | 10.4 | M5x0.8 - 6H   | 50  | # 21 | 1/8 | G-1/8 | 8  | 17.5 | 36 | 27  | 3  | 8  | 11 | 45    | 56     |
| 32   | 12.5 | M6x1 - 6H     | 62  | #4   | 1/4 | G-1/4 | 11 | 20.5 | 47 | 36  | 3  | 10 | 13 | 51    | 64     |
| 40   | 16.6 | M8x1.25 - 6H  | 70  | #4   | 1/4 | G-1/4 | 12 | 21   | 52 | 43  | 3  | 10 | 13 | 55    | 68     |
| 50   | 20.7 | M10x1.5 - 6H  | 80  | #4   | 1/4 | G-1/4 | 14 | 22.5 | 58 | 53  | 3  | 11 | 14 | 60    | 74     |
| 63   | 24.9 | M12x1.75 - 6H | 94  | #4   | 1/4 | G-1/4 | 17 | 26   | 69 | 66  | 3  | 13 | 16 | 67    | 83     |
| 80   | 29.0 | M14x2 - 6H    | 114 | #6   | 3/8 | G-3/8 | 20 | 29.5 | 86 | 83  | 3  | 17 | 20 | 78    | 98     |

<sup>&</sup>lt;sup>1</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### MN and MR Mount Single Rod End - Rod Dimensions

| Bore | ММ  |          |    |          |    |          | R  | od End   |    |          |    |    |       |     |    |     |       | sion |
|------|-----|----------|----|----------|----|----------|----|----------|----|----------|----|----|-------|-----|----|-----|-------|------|
| Ø    | Rod | Style 9  | М  | Style 4  | М  | Style    | 9A | Style 4  | 4A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons  |
|      |     | KK       | Α  | KK       | Α  | KK       | Α  | KK       | Α  | СС       | Α  | AD | AE    | AF  | АМ | С   | D     | NA   |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10 | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11   |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12 | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13   |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15 | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17   |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20 | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21   |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24 | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27   |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30 | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35   |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35 | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43   |

#### **Rod End Dimensions**

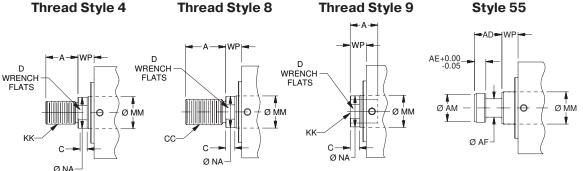

#### "Special" Thread Style 3


Special thread, extension, rod eye, blank, etc. are also available.

To order, specify "Style 3" and give desired dimensions for KK, A, & W (MR Mount) or WP (MN Mount) If otherwise special furnish dimensional sketch.



#### **Series CHD**

#### Style MN Metric Tapped Both Ends Mount with Pilot Gland - Double Rod End - 20mm to 80mm Bore

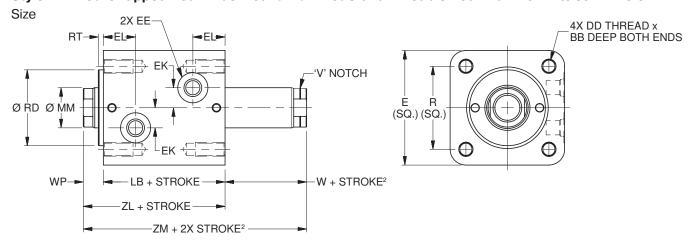

#### MN Mount Double Rod End – Envelope and Mounting Dimensions


| Bore | ВВ   | DD            | E   |      | EE   |       | EK | EL   | R  | RD Ø | RT | W <sup>2</sup> | WP | Add S | troke | Add 2X Stroke   |
|------|------|---------------|-----|------|------|-------|----|------|----|------|----|----------------|----|-------|-------|-----------------|
| Ø    |      |               |     | SAE  | NPTF | BSP   |    |      |    | f9   |    |                |    | LB    | ZL    | ZM <sup>2</sup> |
| 20   | 10   | M5x0.8 - 6H   | 44  | # 2¹ | 1/8  | G-1/8 | 6  | 16.5 | 30 | 24   | 3  | 8              | 11 | 43    | 54    | 62              |
| 25   | 10.4 | M5x0.8 - 6H   | 50  | # 2¹ | 1/8  | G-1/8 | 8  | 17.5 | 36 | 27   | 3  | 8              | 11 | 45    | 56    | 64              |
| 32   | 12.5 | M6x1 - 6H     | 62  | #4   | 1/4  | G-1/4 | 11 | 20.5 | 47 | 36   | 3  | 10             | 13 | 51    | 64    | 74              |
| 40   | 16.6 | M8x1.25 - 6H  | 70  | #4   | 1/4  | G-1/4 | 12 | 21   | 52 | 43   | 3  | 10             | 13 | 55    | 68    | 78              |
| 50   | 20.7 | M10x1.5 - 6H  | 80  | #4   | 1/4  | G-1/4 | 14 | 22.5 | 58 | 53   | 3  | 11             | 14 | 60    | 74    | 85              |
| 63   | 24.9 | M12x1.75 - 6H | 94  | #4   | 1/4  | G-1/4 | 17 | 26   | 69 | 66   | 3  | 13             | 16 | 67    | 83    | 96              |
| 80   | 29.0 | M14x2 - 6H    | 114 | #6   | 3/8  | G-3/8 | 20 | 29.5 | 86 | 83   | 3  | 17             | 20 | 78    | 98    | 115             |

<sup>&</sup>lt;sup>1</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### **MN Mount Double Rod End - Rod Dimensions**

| Bore | ММ  |          |                            |          |    |          | R              | od End   |    |          |    |    |       |     |    |     | Exter |     |
|------|-----|----------|----------------------------|----------|----|----------|----------------|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | M²                         | Style 4  | М  | Style 9  | A <sup>2</sup> | Style 4  | 1A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | <b>A KK A</b> 5 10 M8x1 14 |          | KK | Α        | KK             | Α        | СС | Α        | AD | AE | AF    | AM  | С  | D   | NA    |     |
| 20   | 12  | M8x1.25  | 10                         | M8x1     | 14 | 5/16-24  | 10             | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12                         | M10x1.25 | 16 | 3/8-24   | 12             | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15                         | M12x1.25 | 18 | 7/16-20  | 15             | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20                         | M16x1.5  | 22 | 5/8-18   | 20             | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24                         | M20x1.5  | 28 | 3/4-16   | 24             | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30                         | M27x2    | 36 | 1-14     | 30             | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35                         | M33x2    | 45 | 1 1/4-12 | 35             | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |

#### **Rod End Dimensions**

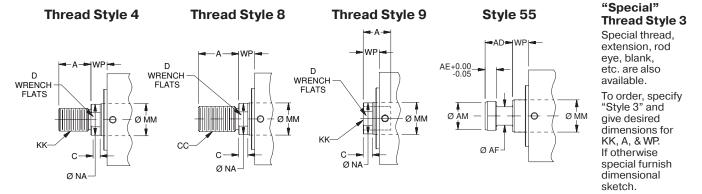




<sup>&</sup>lt;sup>2</sup> Minimum 'W + Stroke' on V notch rod side may apply. See minimum rod extension page for details.

#### Styles J Rectangular Head Flange & H Rectangular Cap Flange Mounts -

Single Rod End – 20mm to 80mm Bore Size

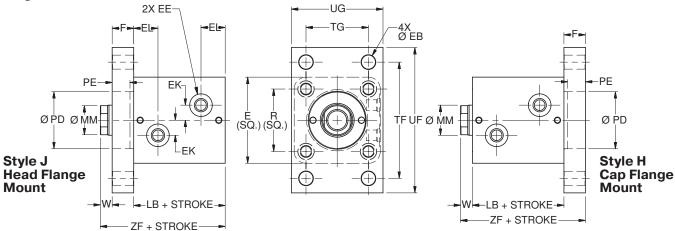

#### J & H Mounts Single Rod End - Envelope and Mounting Dimensions


| Bore | E   |     | EE   |       | EK | EL   | F  | EB Ø | PD Ø | PE | R  | TF  | TG | UF  | UG  | w  | Add S | troke |
|------|-----|-----|------|-------|----|------|----|------|------|----|----|-----|----|-----|-----|----|-------|-------|
| Ø    |     | SAE | NPTF | BSP   |    |      |    |      | Н9   |    |    |     |    |     |     |    | LB    | ZF    |
| 20   | 44  | #2¹ | 1/8  | G-1/8 | 6  | 16.5 | 10 | 5.5  | 24   | 7  | 30 | 60  | 30 | 75  | 46  | 8  | 43    | 61    |
| 25   | 50  | #2¹ | 1/8  | G-1/8 | 8  | 17.5 | 12 | 5.5  | 27   | 9  | 36 | 66  | 36 | 80  | 52  | 8  | 45    | 65    |
| 32   | 62  | #4  | 1/4  | G-1/4 | 11 | 20.5 | 12 | 6.8  | 36   | 9  | 47 | 80  | 40 | 95  | 62  | 10 | 51    | 73    |
| 40   | 70  | #4  | 1/4  | G-1/4 | 12 | 21   | 16 | 11   | 43   | 13 | 52 | 96  | 46 | 118 | 70  | 10 | 55    | 81    |
| 50   | 80  | #4  | 1/4  | G-1/4 | 14 | 22.5 | 20 | 13.5 | 53   | 17 | 58 | 108 | 58 | 135 | 85  | 11 | 60    | 91    |
| 63   | 94  | #4  | 1/4  | G-1/4 | 17 | 26   | 20 | 15   | 66   | 17 | 69 | 124 | 65 | 150 | 98  | 13 | 67    | 100   |
| 80   | 114 | #6  | 3/8  | G-3/8 | 20 | 29.5 | 25 | 17   | 83   | 21 | 86 | 154 | 87 | 185 | 118 | 17 | 78    | 120   |

<sup>&</sup>lt;sup>1</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### J & H Mounts Single Rod End – Rod Dimensions

| Bore | ММ  |          |    |          |    |          | F  | lod End  |    |          |    |    |       |     |    | Rod | Exter | sion |
|------|-----|----------|----|----------|----|----------|----|----------|----|----------|----|----|-------|-----|----|-----|-------|------|
| Ø    | Rod | Style 9  | М  | Style 4  | М  | Style 9  | 9A | Style 4  | 4A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons  |
|      |     | KK       | Α  | KK       | Α  | KK       | Α  | кк       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA   |
| 20   | 12  | M8x1.25  | 10 | M8x1     | 14 | 5/16-24  | 10 | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11   |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24   | 12 | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13   |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20  | 15 | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17   |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18   | 20 | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21   |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16   | 24 | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27   |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14     | 30 | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35   |
| 80   | 45  | M33x3.5  | 35 | M33x2    | 45 | 1 1/4-12 | 35 | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43   |

#### **Rod End Dimensions**

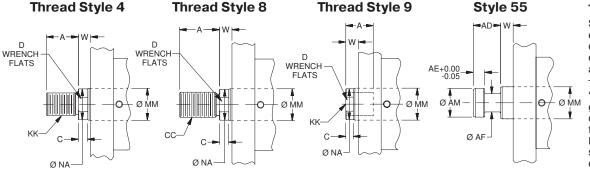


#### "Special" Thread Style 3

Special thread, extension, rod eye, blank, etc. are also available.
To order, specify "Style 3" and give desired dimensions for KK, A, & W. If otherwise special furnish dimensional sketch.

#### **Series CHD**

#### Style J Rectangular Head Flange Mount – Double Rod End – 20mm to 80mm Bore Size

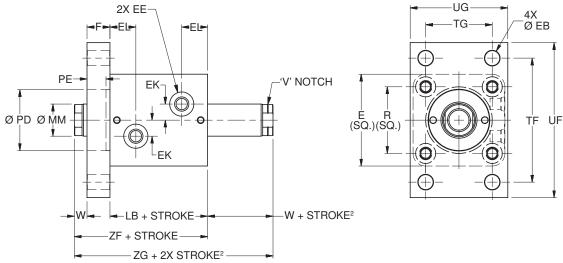

#### J Mount Double Rod End – Envelope and Mounting Dimensions


| Bore | E   |     | EE   |       | EK | EL   | F  | EB Ø | PD Ø | PE | R  | TF  | TG | UF  | UG  | W <sup>2</sup> | Add S | troke | Add 2X Stroke   |
|------|-----|-----|------|-------|----|------|----|------|------|----|----|-----|----|-----|-----|----------------|-------|-------|-----------------|
| Ø    |     | SAE | NPTF | BSP   |    |      |    |      | Н9   |    |    |     |    |     |     |                | LB    | ZF    | ZG <sup>2</sup> |
| 20   | 44  | #2¹ | 1/8  | G-1/8 | 6  | 16.5 | 10 | 5.5  | 24   | 7  | 30 | 60  | 30 | 75  | 46  | 8              | 43    | 61    | 69              |
| 25   | 50  | #2¹ | 1/8  | G-1/8 | 8  | 17.5 | 12 | 5.5  | 27   | 9  | 36 | 66  | 36 | 80  | 52  | 8              | 45    | 65    | 73              |
| 32   | 62  | #4  | 1/4  | G-1/4 | 11 | 20.5 | 12 | 6.8  | 36   | 9  | 47 | 80  | 40 | 95  | 62  | 10             | 51    | 73    | 83              |
| 40   | 70  | #4  | 1/4  | G-1/4 | 12 | 21   | 16 | 11   | 43   | 13 | 52 | 96  | 46 | 118 | 70  | 10             | 55    | 81    | 91              |
| 50   | 80  | #4  | 1/4  | G-1/4 | 14 | 22.5 | 20 | 13.5 | 53   | 17 | 58 | 108 | 58 | 135 | 85  | 11             | 60    | 91    | 102             |
| 63   | 94  | #4  | 1/4  | G-1/4 | 17 | 26   | 20 | 15   | 66   | 17 | 69 | 124 | 65 | 150 | 98  | 13             | 67    | 100   | 113             |
| 80   | 114 | #6  | 3/8  | G-3/8 | 20 | 29.5 | 25 | 17   | 83   | 21 | 86 | 154 | 87 | 185 | 118 | 17             | 78    | 120   | 137             |

<sup>&</sup>lt;sup>1</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### J Mount Double Rod End – Rod Dimensions

| Bore | ММ  |          |                      |          |    |          | R               | od End   |    |          |    |    |       |     |    |     | Exter |     |
|------|-----|----------|----------------------|----------|----|----------|-----------------|----------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | M²                   | Style 4  | М  | Style 9  | )A <sup>2</sup> | Style 4  | 1A | Style    | ВА |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | A KK A 25 10 M8x1 14 |          |    | KK       | Α               | KK       | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 20   | 12  | M8x1.25  | 10                   | M8x1     | 14 | 5/16-24  | 10              | 5/16-24  | 14 | 3/8-24   | 16 | 8  | 3     | 6   | 11 | 6   | 10    | 11  |
| 25   | 14  | M10x1.5  | 12                   | M10x1.25 | 16 | 3/8-24   | 12              | 3/8-24   | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15                   | M12x1.25 | 18 | 7/16-20  | 15              | 7/16-20  | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20                   | M16x1.5  | 22 | 5/8-18   | 20              | 5/8-18   | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24                   | M20x1.5  | 28 | 3/4-16   | 24              | 3/4-16   | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30                   | M27x2    | 36 | 1-14     | 30              | 1-14     | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |
| 80   | 45  | M33x3.5  | 35                   | M33x2    | 45 | 1 1/4-12 | 35              | 1 1/4-12 | 45 | 1 1/2-12 | 56 | 34 | 14    | 28  | 41 | 13  | 39    | 43  |

#### **Rod End Dimensions**

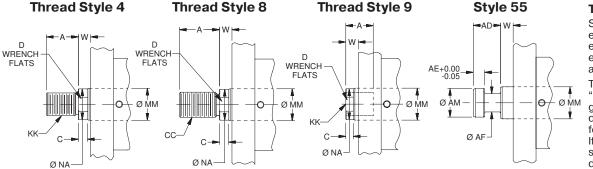


## "Special" Thread Style 3


Special thread, extension, rod eye, blank, etc. are also available.
To order, specify "Style 3" and give desired dimensions for KK, A, & W. If otherwise special furnish dimensional sketch.




<sup>&</sup>lt;sup>2</sup> Minimum 'W + Stroke' on V notch rod side may apply. See minimum rod extension page for details.

#### Style C Foot Mount - Single Rod End - 25mm to 63mm Bore Size







25mm & 32mm **BOLT HOLE DETAIL** 

<del>-</del>⊢EM

 $\oplus$ 

 $^{(\!8\!)}$ 

#### C Mount Single Rod End - Envelope and Mounting Dimensions

| Bore | Е  | ED |                  |     | EE    |               | EF | EK | EL   | EM   | KA  | КВ | кс   | KD   | KE  |
|------|----|----|------------------|-----|-------|---------------|----|----|------|------|-----|----|------|------|-----|
| Ø    |    | Ø  | SAE              | NPT | BSP   | Mani-<br>fold |    |    |      |      |     |    |      |      |     |
| 25   | 45 | 10 | # 2 <sup>1</sup> | 1/8 | G-1/8 | 3             | 2  | 7  | 17.5 | 15.8 | 8.5 | 8  | 3.25 | 3.75 | 45  |
| 32   | 56 | 10 | #4               | 1/4 | G-1/4 | 3             | 2  | 11 | 20.5 | 18.5 | 8   | 12 | 3.25 | 4.75 | 63  |
| 40   | 64 | 12 | #4               | 1/4 | G-1/4 | 3             | 2  | 12 | 21   | 19   | 8   | 12 | 3.25 | 4.75 | 70  |
| 50   | 74 | 15 | #4               | 1/4 | G-1/4 | 4             | 2  | 14 | 22.5 | 21   | 9   | 14 | 3.75 | 5.25 | 80  |
| 63   | 89 | 15 | #4               | 1/4 | G-1/4 | 4             | 2  | 17 | 26   | 24.5 | 11  | 16 | 4.25 | 5.75 | 100 |

<sup>&</sup>lt;sup>1</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### ΚM **MANIFOLD PORT OPTION DETAIL**

FM:

2X Ø ED x EF DEEP

FOR O-RING (INCLUDED)

4X Ø EE (QTY. 2X FOR 25mm AND 32mm)

CAUTION: KM key slot location is for manifold ports only. Do not use for top mounted ports. KA key slot location is for top mounted ports. Do not use for manifold ports.

#### C Mount Single Rod End - Rod Dimensions

| Bore | KM   | LH | SB   | sc   | SD   | TS | US  | vs | W  | XS | А  | dd Strok | æ  | Min. Stroke |
|------|------|----|------|------|------|----|-----|----|----|----|----|----------|----|-------------|
| Ø    |      |    | Ø    |      |      |    |     |    |    |    | LB | SS       | ZJ | For M Port  |
| 25   | 8.5  | 20 | 6.8  | 5.5  | 6.5  | 39 | 50  | 28 | 8  | 23 | 45 | 24.5     | 53 | 10          |
| 32   | 8    | 25 | 9    | 7    | 8.6  | 56 | 70  | 42 | 10 | 30 | 51 | 24       | 61 | 15          |
| 40   | 8    | 29 | 11   | 8.75 | 10.8 | 62 | 80  | -  | 10 | 30 | 55 | 23       | 65 | 15          |
| 50   | 13   | 34 | 13.5 | 10   | 13   | 74 | 94  | -  | 11 | 31 | 60 | 27       | 71 | 20          |
| 63   | 15.5 | 42 | 16   | 11.5 | 15.2 | 90 | 114 | -  | 13 | 33 | 67 | 32       | 80 | 20          |

#### C Mount Single Rod End - Rod Dimensions

| Bore | ММ  |          |    |          |    |         | F  | lod End |    |          |    |    |       |     |    |     | Exten |     |
|------|-----|----------|----|----------|----|---------|----|---------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | М  | Style 4  | М  | Style 9 | 9A | Style 4 | 1A | Style 8  | ВА |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | Α  | кк       | Α  | KK      | Α  | кк      | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24  | 12 | 3/8-24  | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20 | 15 | 7/16-20 | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18  | 20 | 5/8-18  | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16  | 24 | 3/4-16  | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14    | 30 | 1-14    | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |

#### **Rod End Dimensions**

**Thread Style 4** 


ØММ

D WRENCH **FLATS** 


Ø NA

# WRENCH FLATS Ø NA

Thread Style 8



**Thread Style 9** 



Style 55

#### "Special" Thread Style 3


Special thread, extension, rod eve, blank, etc. are also available. To order, specify "Style 3" and give desired dimensions for KK, A, & W. If otherwise special furnish dimensional sketch.



# Ø NA

#### C Mount – Double Rod End


#### Style C Foot Mount - Double Rod End - 25mm to 63mm Bore Size

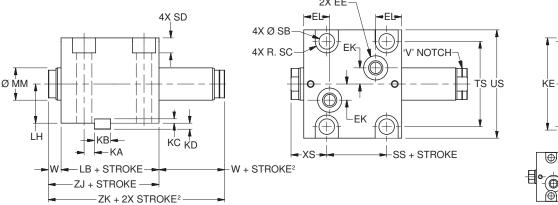


#### **C Mount Double Rod End – Envelope and Mounting Dimensions**

| Bore | Е  | ED |                  | I   | EE    |               | EF | EK | EL   | EM   | KA  | KB | KC   | KD   | KE  |
|------|----|----|------------------|-----|-------|---------------|----|----|------|------|-----|----|------|------|-----|
| Ø    |    | Ø  | SAE              | NPT | BSP   | Mani-<br>fold |    |    |      |      |     |    |      |      |     |
| 25   | 45 | 10 | # 2 <sup>1</sup> | 1/8 | G-1/8 | 3             | 2  | 7  | 17.5 | 15.8 | 8.5 | 8  | 3.25 | 3.75 | 45  |
| 32   | 56 | 10 | #4               | 1/4 | G-1/4 | 3             | 2  | 11 | 20.5 | 18.5 | 8   | 12 | 3.25 | 4.75 | 63  |
| 40   | 64 | 12 | #4               | 1/4 | G-1/4 | 3             | 2  | 12 | 21   | 19   | 8   | 12 | 3.25 | 4.75 | 70  |
| 50   | 74 | 15 | #4               | 1/4 | G-1/4 | 4             | 2  | 14 | 22.5 | 21   | 9   | 14 | 3.75 | 5.25 | 80  |
| 63   | 89 | 15 | #4               | 1/4 | G-1/4 | 4             | 2  | 17 | 26   | 24.5 | 11  | 16 | 4.25 | 5.75 | 100 |

<sup>&</sup>lt;sup>1</sup> Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.







#### MANIFOLD PORT OPTION DETAIL

CAUTION: KM key slot location is for manifold ports only. Do not use for top mounted ports. KA key slot location is for top mounted ports. Do not use for manifold ports.


#### C Mount Double Rod End – Rod Dimensions

| Bore | KM   | LH | SB   | sc   | SD   | TS | US  | vs | W <sup>2</sup> | XS | A  | dd Strol | ke | Add 2X Stroke   |            |
|------|------|----|------|------|------|----|-----|----|----------------|----|----|----------|----|-----------------|------------|
| Ø    |      |    | Ø    |      |      |    |     |    |                |    | LB | SS       | ZJ | ZK <sup>2</sup> | For M Port |
| 25   | 8.5  | 20 | 6.8  | 5.5  | 6.5  | 39 | 50  | 28 | 8              | 23 | 45 | 24.5     | 53 | 61              | 10         |
| 32   | 8    | 25 | 9    | 7    | 8.6  | 56 | 70  | 42 | 10             | 30 | 51 | 24       | 61 | 71              | 15         |
| 40   | 8    | 29 | 11   | 8.75 | 10.8 | 62 | 80  | -  | 10             | 30 | 55 | 23       | 65 | 75              | 15         |
| 50   | 13   | 34 | 13.5 | 10   | 13   | 74 | 94  | -  | 11             | 31 | 60 | 27       | 71 | 82              | 20         |
| 63   | 15.5 | 42 | 16   | 11.5 | 15.2 | 90 | 114 | _  | 13             | 33 | 67 | 32       | 80 | 93              | 20         |

#### C Mount Single Rod End - Rod Dimensions

| Bore | ММ  |          |    |          |    |         | Ro                    | d End   |    |          |    |    |       |     |    | Rod |       |     |
|------|-----|----------|----|----------|----|---------|-----------------------|---------|----|----------|----|----|-------|-----|----|-----|-------|-----|
| Ø    | Rod | Style 9  | M² | Style 4I | М  | Style 9 | <b>A</b> <sup>2</sup> | Style 4 | 4A | Style 8  | BA |    | Style | 55M |    | Din | nensi | ons |
|      |     | KK       | Α  | KK       | Α  | KK      | Α                     | KK      | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA  |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24  | 12                    | 3/8-24  | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13  |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20 | 15                    | 7/16-20 | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17  |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18  | 20                    | 5/8-18  | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21  |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16  | 24                    | 3/4-16  | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27  |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14    | 30                    | 1-14    | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35  |

#### **Rod End Dimensions**

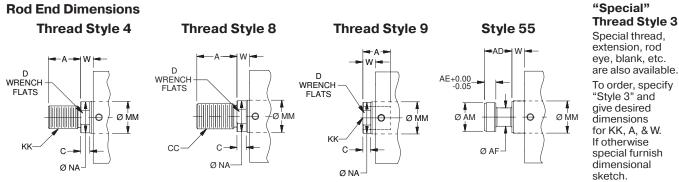






#### Schrader bellows

<sup>&</sup>lt;sup>2</sup> Minimum 'W + Stroke' on V notch rod side may apply. See minimum rod extension page for details.

#### Style CN Foot Mount with Pilot Gland - Single Rod End - 25mm to 63mm Bore Size








#### **CN Mount Single Rod End – Envelope and Mounting Dimensions**

| Bore | Е  | ED |      |     | EE    |               | EF | EK | EL   | EM   | KA  | KB | кс   | KD   | KE  |
|------|----|----|------|-----|-------|---------------|----|----|------|------|-----|----|------|------|-----|
| Ø    |    | Ø  | SAE  | NPT | BSP   | Man-<br>ifold |    |    |      |      |     |    |      |      |     |
| 25   | 45 | 10 | # 21 | 1/8 | G-1/8 | 3             | 2  | 7  | 17.5 | 15.8 | 8.5 | 8  | 3.25 | 3.75 | 45  |
| 32   | 56 | 10 | #4   | 1/4 | G-1/4 | 3             | 2  | 11 | 20.5 | 18.5 | 8   | 12 | 3.25 | 4.75 | 63  |
| 40   | 64 | 12 | #4   | 1/4 | G-1/4 | 3             | 2  | 12 | 21   | 19   | 8   | 12 | 3.25 | 4.75 | 70  |
| 50   | 74 | 15 | #4   | 1/4 | G-1/4 | 4             | 2  | 14 | 22.5 | 21   | 9   | 14 | 3.75 | 5.25 | 80  |
| 63   | 89 | 15 | #4   | 1/4 | G-1/4 | 4             | 2  | 17 | 26   | 24.5 | 11  | 16 | 4.25 | 5.75 | 100 |

¹ Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.



#### MANIFOLD PORT OPTION DETAIL

CAUTION: KM key slot location is for manifold ports only. Do not use for top mounted ports. KA key slot location is for top mounted ports. Do not use for manifold ports.

#### **CN Mount Single Rod End – Rod Dimensions**

| Bore | KM   | LH | RD Ø | RT | SB   | sc   | SD   | TS | US  | vs | WP | XN | A  | dd Strol | ke | Min. Stroke |
|------|------|----|------|----|------|------|------|----|-----|----|----|----|----|----------|----|-------------|
| Ø    |      |    | f9   |    | Ø    |      |      |    |     |    |    |    | LB | SS       | ZL | For M Port  |
| 25   | 8.5  | 20 | 27   | 3  | 6.8  | 5.5  | 6.5  | 39 | 50  | 28 | 11 | 26 | 45 | 24.5     | 56 | 10          |
| 32   | 8    | 25 | 36   | 3  | 9    | 7    | 8.6  | 56 | 70  | 42 | 13 | 33 | 51 | 24       | 64 | 15          |
| 40   | 8    | 29 | 43   | 3  | 11   | 8.75 | 10.8 | 62 | 80  | -  | 13 | 33 | 55 | 23       | 68 | 15          |
| 50   | 13   | 34 | 53   | 3  | 13.5 | 10   | 13   | 74 | 94  | -  | 14 | 34 | 60 | 27       | 74 | 20          |
| 63   | 15.5 | 42 | 66   | 3  | 16   | 11.5 | 15.2 | 90 | 114 | -  | 16 | 36 | 67 | 32       | 83 | 20          |

#### **CN Mount Single Rod End – Rod Dimensions**

| Bore | ММ  |          |    |          |    |         | R  | od End  |    |          |    |    |       |     |    | Rod | Exter | sion |
|------|-----|----------|----|----------|----|---------|----|---------|----|----------|----|----|-------|-----|----|-----|-------|------|
| Ø    | Rod | Style 9  | М  | Style 4  | М  | Style   | 9A | Style   | 4A | Style    | ВА |    | Style | 55M | -  | Din | nensi | ons  |
|      | Ø   | KK       | Α  | KK       | Α  | KK      | Α  | KK      | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA   |
| 25   | 14  | M10x1.5  | 12 | M10x1.25 | 16 | 3/8-24  | 12 | 3/8-24  | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13   |
| 32   | 18  | M12x1.75 | 15 | M12x1.25 | 18 | 7/16-20 | 15 | 7/16-20 | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17   |
| 40   | 22  | M16x2    | 20 | M16x1.5  | 22 | 5/8-18  | 20 | 5/8-18  | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21   |
| 50   | 28  | M20x2.5  | 24 | M20x1.5  | 28 | 3/4-16  | 24 | 3/4-16  | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27   |
| 63   | 36  | M27x3    | 30 | M27x2    | 36 | 1-14    | 30 | 1-14    | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35   |


#### **Rod End Dimensions** "Special" Thread Style 3 **Thread Style 4** Thread Style 8 **Thread Style 9** Style 55 Special thread, AD=IWPI= extension, rod eye, blank, etc. D WRENCH AE+0.00 -0.05 are also available. D WRENCH To order, specify WRENCH FLATS **FLATS** "Style 3" and givé desired ØMM ØММ dimensions for ØAM 0 ØMM øмм KK, A, & WP. If otherwise special furnish Ø AF dimensional Ø NA Ø NA Ø NA sketch.



#### Schrader Bellows

#### **Series CHD**

#### Style CN Foot Mount with Pilot Gland - Double Rod End - 25mm to 63mm Bore Size

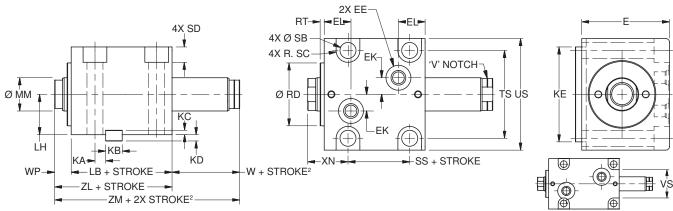


#### **CN Mount Double Rod End – Envelope and Mounting Dimensions**

| Bore | Е  | ED |      |     | EE    |               | EF | EK | EL   | EM   | KA  | KB | KC   | KD   | KE  |
|------|----|----|------|-----|-------|---------------|----|----|------|------|-----|----|------|------|-----|
| Ø    |    | Ø  | SAE  | NPT | BSP   | Mani-<br>fold |    |    |      |      |     |    |      |      |     |
| 25   | 45 | 10 | # 21 | 1/8 | G-1/8 | 3             | 2  | 7  | 17.5 | 15.8 | 8.5 | 8  | 3.25 | 3.75 | 45  |
| 32   | 56 | 10 | #4   | 1/4 | G-1/4 | 3             | 2  | 11 | 20.5 | 18.5 | 8   | 12 | 3.25 | 4.75 | 63  |
| 40   | 64 | 12 | #4   | 1/4 | G-1/4 | 3             | 2  | 12 | 21   | 19   | 8   | 12 | 3.25 | 4.75 | 70  |
| 50   | 74 | 15 | #4   | 1/4 | G-1/4 | 4             | 2  | 14 | 22.5 | 21   | 9   | 14 | 3.75 | 5.25 | 80  |
| 63   | 89 | 15 | #4   | 1/4 | G-1/4 | 4             | 2  | 17 | 26   | 24.5 | 11  | 16 | 4.25 | 5.75 | 100 |

¹ Parker Triple-Lok™ Straight Thread Connector SAE #2 to ¼" 37° flare can be used when this port thread is required. Contact your local Parker Tube Fitting distributor and specify part number 4-2 F5OX.

#### 25mm & 32mm BOLT HOLE DETAIL



#### MANIFOLD PORT OPTION DETAIL

CAUTION: KM key slot location is for manifold ports only. Do not use for top mounted ports. KA key slot location is for top mounted ports. Do not use for manifold ports.

#### **CN Mount Double Rod End – Envelope and Mounting Dimensions**

| Bore | КМ   | LH | RDØ | RT | SBØ  | sc   | SD   | TS | US  | vs | W <sup>2</sup> | WP | XN | Ad | d Stro | ke | Add 2X Stroke   |            |
|------|------|----|-----|----|------|------|------|----|-----|----|----------------|----|----|----|--------|----|-----------------|------------|
| Ø    |      |    | f9  |    |      |      |      |    |     |    |                |    |    | LB | SS     | ZL | ZM <sup>2</sup> | For M Port |
| 25   | 8.5  | 20 | 27  | 3  | 6.8  | 5.5  | 6.5  | 39 | 50  | 28 | 8              | 11 | 26 | 45 | 24.5   | 56 | 64              | 10         |
| 32   | 8    | 25 | 36  | 3  | 9    | 7    | 8.6  | 56 | 70  | 42 | 10             | 13 | 33 | 51 | 24     | 64 | 74              | 15         |
| 40   | 8    | 29 | 43  | 3  | 11   | 8.75 | 10.8 | 62 | 80  | -  | 10             | 13 | 33 | 55 | 23     | 68 | 78              | 15         |
| 50   | 13   | 34 | 53  | 3  | 13.5 | 10   | 13   | 74 | 94  | -  | 11             | 14 | 34 | 60 | 27     | 74 | 85              | 20         |
| 63   | 15.5 | 42 | 66  | 3  | 16   | 11.5 | 15.2 | 90 | 114 | -  | 13             | 16 | 36 | 67 | 32     | 83 | 96              | 20         |

#### **CN Mount Double Rod End – Rod Dimensions**

| Bore | ММ  |          |             |          |    |         | Roo            | d End   |    |          |    |    |       |     |    |     |       | nsion |
|------|-----|----------|-------------|----------|----|---------|----------------|---------|----|----------|----|----|-------|-----|----|-----|-------|-------|
| Ø    | Rod | Style 9N | <b>∕I</b> ² | Style 4I | М  | Style 9 | A <sup>2</sup> | Style 4 | 1A | Style 8  | BA |    | Style | 55M |    | Din | nensi | ons   |
|      |     | KK       | Α           | KK       | Α  | KK      | Α              | KK      | Α  | СС       | Α  | AD | AE    | AF  | AM | С   | D     | NA    |
| 25   | 14  | M10x1.5  | 12          | M10x1.25 | 16 | 3/8-24  | 12             | 3/8-24  | 16 | 1/2-20   | 18 | 12 | 4     | 8   | 13 | 6   | 12    | 13    |
| 32   | 18  | M12x1.75 | 15          | M12x1.25 | 18 | 7/16-20 | 15             | 7/16-20 | 18 | 9/16-18  | 25 | 16 | 6     | 10  | 16 | 8   | 15    | 17    |
| 40   | 22  | M16x2    | 20          | M16x1.5  | 22 | 5/8-18  | 20             | 5/8-18  | 22 | 3/4-16   | 30 | 20 | 8     | 12  | 20 | 8   | 19    | 21    |
| 50   | 28  | M20x2.5  | 24          | M20x1.5  | 28 | 3/4-16  | 24             | 3/4-16  | 28 | 7/8-14   | 35 | 24 | 10    | 16  | 25 | 9   | 24    | 27    |
| 63   | 36  | M27x3    | 30          | M27x2    | 36 | 1-14    | 30             | 1-14    | 36 | 1 1/4-12 | 45 | 28 | 12    | 22  | 33 | 11  | 32    | 35    |

#### **Rod End Dimensions Thread Style 4** Thread Style 8 **Thread Style 9** Style 55 D WRENCH AE+0.00 -0.05 D WRENCH WRENCH FLATS FLATS **FLATS** ØMM ØÅM ØMM ØMM 0 0 ø мм ØNA Ø NA Ø NA

### "Special" Thread Style 3

Special thread, extension, rod eye, blank, etc. are also available. To order, specify "Style 3" and give desired dimensions for KK, A, & WP. If otherwise special furnish dimensional sketch.



 $<sup>^{2}</sup>$  Minimum 'W + Stroke' on V notch rod side may apply. See minimum rod extension page for details.

### **EPS-C Threaded Style End-of-Stroke Switch**

Optional high pressure inductive switches provide an endof stroke signal in Series CHD cylinders. Available on both ends or one end only, EPS-C switches are low profile and can be specified on any of the four sides of the cylinder, except Styles C and CN where they are only available at port position #1.


| EPS-C Sv                         | witch Specifications  |
|----------------------------------|---|
| Switch Type:                     | Inductive Proximity   |
| Style:                           | EPS-C   |
| Code Designator:                 | J   |
| Description:                     | General Purpose, 3 wire, DC Sensor                            |
| Supply Voltage:                  | 10 to 30 VDC  |
| Load Current, max.:              | 100 mA  |
| Leak Current:                    | 100 μΑ  |
| Voltage Drop:                    | ≤ 2.5 V   |
| Operating Temperature:           | -13° F to +176°F  |
| Part Number:                     | 0961930000  |
| Connection:                      | .3m Lead with 8mm Connector                                   |
| Enclosure Rating:                | Enclosure - IP68  |
| Led Indication:                  | No  |
| <b>Short Circuit Protection:</b> | Yes   |
| Weld Field Immunity:             | Yes   |
| Output:                          | PNP   |
| Approvals/Marks:                 | CE  |
| Make/Break Location:             | 0.25" from end of stroke typical.<br>Tolerance is +0 / -0.13" |
| Wiring Instructions:             | $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$        |

#### EPS-C limit switches may be ordered as follows:

- 1) Complete the basic cylinder model number.
- 2) Place an "S" in the model number for Special Modification.
- 3) Special modifications to cylinders other than switches must be described in the item notes.
- 4) Limit Switch Code Specify letter prefix "J" for EPS-C then fill in the four blanks specifying port location, switch location and actuation point for both head and cap. If only one switch is used, place "XXXX" in the unused blanks.


Example = J13GG-XXXX denotes a switch on the Gland end only.

Example = XXXX-J42GG denotes a switch on the cap end only.




#### **EPS-C Switch Dimensions**

| Bore<br>Ø | EN   | HS   |
|-----------|------|------|
| 25        | 17   | 50.5 |
| 32        | 20   | 54   |
| 40        | 21   | 58   |
| 50        | 23.5 | 63   |
| 63        | 26.5 | 69.5 |
| 80        | 30   | 78   |

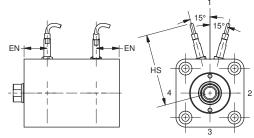

Bores 25 – 80 Position 1 only (Styles C & CN position 1 only)

Note: Switch installation at 15° angle is only required when specified at position 1 (same position as ports).

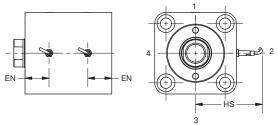

Bores 25 – 80 Positions 2 – 4 (Styles C & CN position 1 only)

#### **8mm Cordset**

| Cable Length | Threaded<br>Connector | Snap On<br>Connector |
|--------------|-----------------------|----------------------|
| 5 meters     | 086620T005            | 086620S005           |
| 2 meters     | 086620T002            | 086620S002           |

#### **Limit Switch Code**

|                  | 0040          |                 |   |               |                 |   |
|------------------|---------------|-----------------|---|---------------|-----------------|---|
|                  | Head          | d End           |   |               | Cap End         |   |
| J                | <b>1</b> ¹    | 2               | GG                                      | <b>1</b> 1    | 2               | GG                                      |
| Specify: J=EPS-C | Port Location | Switch Location | Actuation Point<br>GG= End<br>of Stroke | Port Location | Switch Location | Actuation Point<br>GG= End<br>of Stroke |

<sup>1</sup> Ports must always be specified in position 1.





#### **Series CHD**

### Suggested Machining for Mounting Series CHD Styles C & CN Cylinders

The drawings and dimensions can be used as a suggested guide for preparing the mounting interface for a mounting style C or CN cylinder. Take care to note that the keyway location varies between top threaded port and bottom manifold port types. The KA keyway location is for top ports only and should

not be used for manifold ports. And, the KM keyway location is for bottom manifold ports and should not be used for top threaded ports. Also the XS rod dimension applies only to the C mount and the XN rod dimension applies only to the CN mount.

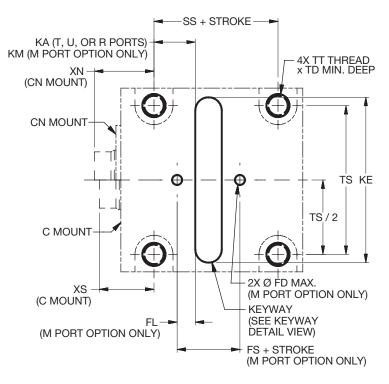



#### **Machining Interface Dimensions**

| Bore | FD <sup>2</sup> | FL <sup>2</sup> | KA <sup>1</sup> | KB                   | KE                 | $\mathbf{K}\mathbf{M}^2$ | KR        | KT       | TD | TS | TT          | <b>XN</b> <sup>3</sup> | XS <sup>3</sup> | Add S           | troke |
|------|-----------------|-----------------|-----------------|----------------------|--------------------|--------------------------|-----------|----------|----|----|-------------|------------------------|-----------------|-----------------|-------|
| Ø    |                 |                 |                 |                      |                    |                          |           |          |    |    |             |                        |                 | FS <sup>2</sup> | SS    |
| 25   | 3               | 7.8             | 8.5             | 8 -0.043             | 45 <sup>+0.5</sup> | 8.5                      | 0.16 +.09 | 4 +0.2   | 14 | 39 | M6x1-6H     | 26                     | 23              | 13.5            | 24.5  |
| 32   | 3               | 9.5             | 8               | 12 -0.043            | 63 <sup>+0.5</sup> | 8                        | 0.25 +.15 | 5 +0.2   | 16 | 56 | M8x1.25-6H  | 33                     | 30              | 14              | 24    |
| 40   | 5               | 9               | 8               | 12 -0.043            | 70 +0.5            | 8                        | 0.25 +.15 | 5 +0.2   | 20 | 62 | M10x1.5-6H  | 33                     | 30              | 17              | 23    |
| 50   | 6               | 12              | 9               | 14 <sup>-0.043</sup> | 80 +0.5            | 13                       | 0.25 +.15 | 5.5 +0.2 | 22 | 74 | M12x1.75-6H | 34                     | 31              | 18              | 27    |
| 63   | 6               | 11              | 11              | 16 <sup>-0.043</sup> | 100 +0.5           | 15.5                     | 0.25 +.15 | 6 +0.2   | 24 | 90 | M14x2-6H    | 36                     | 33              | 18              | 32    |

 $<sup>^{\</sup>rm 1}$  KA keyway location is for top ports only - do not use for 'M' manifold port option.

#### **Mounting Hardware**

| Bore<br>Ø | Nominal Key<br>Dimensions | Mounting<br>SHCS <sup>4</sup> |
|-----------|---------------------------|-------------------------------|
| 25        | 8 x 7 x 45                | M6 x 50                       |
| 32        | 12 x 8 x 63               | M8 x 60                       |
| 40        | 12 x 8 x 70               | M10 x 70                      |
| 50        | 14 x 9 x 80               | M12 x 80                      |
| 63        | 16 x 10 x 100             | M14 x 95                      |

<sup>&</sup>lt;sup>4</sup> Customer supplied (4x)



<sup>&</sup>lt;sup>2</sup> KM keyway location, FD flow hole Ø and FL / FS flow hole locations apply to 'M' manifold port option only.

<sup>&</sup>lt;sup>3</sup> XS dimension is used for C mount; XN dimension is used for CN mount.


#### **Minimum Rod Extension**

#### **Minimum Rod Extension**

Double rod cylinders with Style 9 on V notch side of cylinder

When a rod end Style 9 is specified on the V notch side of a double rod cylinder, a minimum W + Stroke dimension is required. This bore and stroke dependent value is shown in the following table.

| Bore | Minimum    | For Strokes Equal-to |
|------|------------|----------------------|
| Ø    | W + Stroke | or Less-than         |
| 20   | 18         | 10                   |
| 25   | 23         | 15                   |
| 32   | 25         | 15                   |
| 40   | 30         | 20                   |
| 50   | 31         | 20                   |
| 63   | 38         | 25                   |
| 80   | 42         | 25                   |
| 100  | 51         | 25                   |

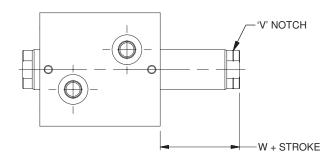

Style 3 (special) rod ends with female thread depth equal to the standard A dimension are also subject to this minimum. For deeper threads, the minimum W + Stroke will increase by the depth increase beyond the standard A dimension. No other rod end styles have this limitation.



#### **Cylinder Mounting**

Always mount Series CHE & CHD cylinders using high tensile alloy steel socket head screws and torque them to the values shown. In addition to bolts, styles C, CA & CN cylinders should be keyed to the mounting surface with a thrust key, utilizing the groove provided

in the cylinder body or mounting bracket. Bolt kits for T, TN, and TR mounts are offered and can be specified by kit part numbers on the next page. Refer to CHE or CHD mounting style pages for bore and mounting availability.

#### **Mounting Bolt Torques**

| Series   | Bore | Metric Mounting Bolts  |          |              |                        | nch Mounting Bol    | ts             |
|----------|------|------------------------|----------|--------------|------------------------|---------------------|----------------|
|          | Ø    | Mount                  | Size     | Torque (N-m) | Mount                  | Size                | Torque (lb-ft) |
|          | 20   | T, TN, TR              | M5x0.8   | 4.5 - 4.7    | T, TN, TR              | #10-32              | 3.2 - 3.4      |
| CHE      | 25   | T, TN, TR              | M5x0.8   | 4.5 - 4.7    | T, TN, TR              | #10-32              | 3.2 - 3.4      |
|          | 32   | T, TN, TR              | M6x1     | 7.5 - 7.9    | T, TN, TR              | 1/4-28              | 5.6 - 5.9      |
|          | 40   | T, TN, TR              | M8x1.25  | 18 - 19      | T, TN, TR              | 5/16-24             | 13 - 14        |
|          | 50   | T, TN, TR              | M10x1.5  | 35 - 37      | T, TN, TR              | 3/8-24              | 25 - 26        |
|          | 63   | T, TN, TR              | M12x1.75 | 60 - 63      | T, TN, TR              | 1/2-20              | 47 - 49        |
|          |      |                        |          |              |                        | 1/2-201             | 70 - 73        |
|          | 80   | T, TN, TR              | M14x2    | 100 - 105    | T, TN, TR              | 9/16-18             | 75 - 79        |
|          | 100  | T, TN, TR              | M16x2    | 150 - 158    | T, TN, TR              | 5/8-18              | 115 - 120      |
|          | 20   | T, TN, TR<br>M, MN, MR | M5x0.8   | 6.8 - 7.1    | T, TN, TR<br>A, AN, AR | #10-32              | 4.7 - 4.9      |
| ,        | 25   | T, TN, TR<br>M, MN, MR | M5x0.8   | 6.8 - 7.1    | T, TN, TR<br>A, AN, AR | #10-32              | 4.7 - 4.9      |
|          | 32   | T, TN, TR<br>M, MN, MR | M6x1     | 11 - 12      | T, TN, TR<br>A, AN, AR | 1/4-28              | 8.3 - 8.7      |
| СНД      | 40   | T, TN, TR<br>M, MN, MR | M8x1.25  | 27 - 28      | T, TN, TR<br>A, AN, AR | 5/16-24             | 20 - 21        |
|          | 50   | T, TN, TR<br>M, MN, MR | M10x1.5  | 55 - 58      | T, TN, TR<br>A, AN, AR | 3/8-24              | 38 - 40        |
|          | 63   | T, TN, TR<br>M, MN, MR | M12x1.75 | 90 - 95      | T, TN, TR<br>A, AN, AR | 1/2-20              | 70 - 73        |
|          | 80   |                        |          |              | T, TN, TR              | 1/2-20 <sup>1</sup> | 70 - 73        |
|          |      | T, TN, TR<br>M, MN, MR | M14x2    | 150 - 158    | I, IIN, In             | 9/16-18             | 110 - 115      |
|          |      | , ,                    |          |              | A, AN, AR              | 5/8-18              | 170 - 178      |
|          | 20   | J, H                   | M5x0.8   | 6.8 - 7.1    | J, H                   | #10-32              | 4.7 - 4.9      |
|          | 25   | J, H                   | M5x0.8   | 6.8 - 7.1    | J, H                   | #10-32              | 4.7 - 4.9      |
|          | 32   | J, H                   | M6x1     | 11 - 12      | J, H                   | 1/4-28              | 8.3 - 8.7      |
| CHE      | 40   | J, H                   | M10x1.5  | 55 - 58      | J, H                   | 3/8-24              | 38 - 40        |
| & CHD    | 50   | J, H                   | M12x1.75 | 90 - 95      | J, H                   | 1/2-20              | 70 - 73        |
|          | 63   | J, H                   | M14x2    | 150 - 158    | J, H                   | 9/16-18             | 110 - 115      |
|          | 80   | J, H                   | M16x2    | 230 - 240    | J, H                   | 5/8-18              | 170 - 178      |
|          | 100  | J, H                   | M20x2.5  | 450 - 475    | J, H                   | 3/4-16              | 315 - 330      |
|          | 20   | CA                     | M5x0.8   | 6.8 - 7.1    | CA                     | #10-32              | 4.7 - 4.9      |
|          | 25   | C, CN, CA              | M6x1     | 11 - 12      | C, CN, CA              | 1/4-28              | 8.3 - 8.7      |
| Ì        | 32   | C, CN, CA              | M8x1.25  | 27 - 28      | C, CN, CA              | 5/16-18             | 20 - 21        |
| CHE      | 40   | C, CN, CA              | M10x1.5  | 55 - 58      | C, CN, CA              | 3/8-18              | 38 - 40        |
| &<br>CHD | 50   | C, CN, CA              | M12x1.75 | 90 - 95      | C, CN, CA              | 1/2-20              | 70 - 73        |
|          | 63   | C, CN, CA              | M14x2    | 150 - 158    | C, CN, CA              | 9/16-18             | 110 - 115      |
|          | 80   | CA                     | M16x2    | 230 - 242    | CA                     | 5/8-18              | 170 - 178      |
| Ì        | 100  | CA                     | M20x2.5  | 450 - 475    | CA                     | 3/4-16              | 315 - 330      |


When using ½" socket head cap screws with 80mm T mount, flat washers are required; flat washer OD must be .866" ±.020 (22mm ±0.5).



### **Cylinder Mounting**

## Mounting Bolt Kits for Series CHE & CHD – Styles T, TN & TR (Kits include four bolts.)

| Bore<br>Ø | Bolt Bolt<br>Size Length |                | A Thread<br>Length <sup>1</sup> | Kit Part<br>Number   |
|-----------|--------------------------|----------------|---------------------------------|----------------------|
| 20        | M5x0.8                   | 45mm + Stroke  | 7.4mm                           | CHEB020 <sup>2</sup> |
| 25        | M5x0.8                   | 50mm + Stroke  | 10.4mm                          | CHEB025 <sup>2</sup> |
| 32        | M6x1                     | 55mm + Stroke  | 10.5mm                          | CHEB032 <sup>2</sup> |
| 40        | M8x1.25                  | 60mm + Stroke  | 13.6mm                          | CHEB040 <sup>2</sup> |
| 50        | M10x1.5                  | 65mm + Stroke  | 15.8mm                          | CHEB050 <sup>2</sup> |
| 63        | M12x1.75                 | 70mm + Stroke  | 16.0mm                          | CHEB063 <sup>2</sup> |
| 80        | M14x2                    | 85mm + Stroke  | 22.2mm                          | CHEB080 <sup>2</sup> |
| 100       | M16x2                    | 105mm + Stroke | 26.5mm                          | CHEB100 <sup>2</sup> |

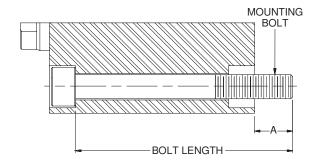


<sup>&</sup>lt;sup>1</sup> For intermediate stroke lengths the 'A' exposed thread length will be therefore increased by the difference between the actual stroke and the next longer 5mm bolt stroke length increment.

E.g. Kit number for 20mm bore, 35mm stroke – CHEB020035 Kit number for 50mm bore, 72mm stroke – CHEB050075



<sup>&</sup>lt;sup>2</sup> The last three digits of the kit part number are to be supplied as the cylinder stroke in 5mm increments. When specifying a bolt kit for intermediate stroke lengths, use the next longer 5mm stroke increment.

### **Parts Identification Drawing – Standard Piston**

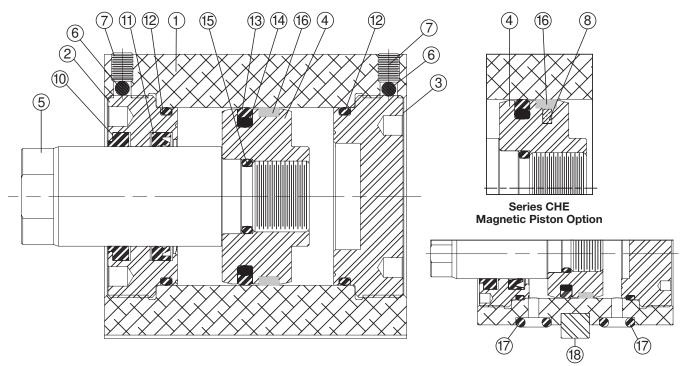

Series CHD - C & CN Mount Manifold Port Option

| Item | Description          | Material                    | Item  | Description             | Material            |                     |
|------|----------------------|-----------------------------|-------|-------------------------|---------------------|---------------------|
| No.  |                      |                             | No.   |                         | Standard            | Fluorocarbon        |
|      | Outlindor Body, CLIE | Aluminum Alloy              | 10    | Rod Wiper               | PUR                 | Fluorocarbon        |
| 1    | Cylinder Body - CHE  | (Hard Anodized)             | 11    | Rod Seal                | PUR                 | Fluorocarbon        |
|      | Cylinder Body - CHD  | Steel                       | Not   | Rod Seal Back-up        | Not                 | Virgin PTFE         |
| 2    | Gland                | Nodular Iron or Bronze      | Shown | Washer <sup>2</sup>     | Required            | VIIGITE             |
| 3    | Cap                  | Nodular Iron or Bronze      | 12    | End Seal                | PUR                 | Fluorocarbon        |
| 4    | Piston – Standard    | Nodular Iron                | 13    | Piston Seal             | PUR                 | Filled PTFE         |
| 4    | Piston – with Magnet | Aluminum Alloy              | 14    | PS Energizer            | NBR                 | Fluorocarbon        |
| 5    | Piston Rod           | Piston Bod Carbon Steel     |       | Piston-to-Rod<br>o-ring | PUR                 | Fluorocarbon        |
|      |                      | (Hard Chrome Plated)        |       |                         | Glass-              | Glass-              |
| 6    | Ball                 | Nylon                       | 16    | Piston Wear Band        | reinforced<br>nylon | reinforced<br>nylon |
| 7    | Set Screw            | Alloy Steel                 | 17    | Manifold Port Seal      | PUR                 | Fluorocarbon        |
| 8    | Magnet               | Sintered NdFeB <sup>1</sup> | 18    | C & CN Mount Key        | St                  | eel                 |

<sup>&</sup>lt;sup>1</sup> Neodymium Iron Boron

<sup>&</sup>lt;sup>2</sup>32-100mm bores only

#### **Seal Kits / Gland & Cap Spanner Holes**

#### Series CHE / CHD

#### **Seal Kits For Series CHE & CHD**

See Standard Specifications Page for fluid and temperature compatibility. Cylinder gland and cap are threaded into the cylinder body. To service rod seal, rod wiper, piston seal, or end seals the gland or cap must be removed. Spanner holes in the gland and cap are available for the purpose of removing and installing these components. Be sure to torque the gland or cap to the specifications below and replace the nylon ball and set screw to further lock them in place. Refer to CHE & CHD mounting style pages for Bore and Rod Diameter availability.

#### Rod Gland and Rod Seal Kits for Series CHE & CHD

| Rod | Rod   | I Gland (w/o pilot¹) | Kits       | Rod Seal Kits                                |            |            |  |
|-----|---|----------------------|------------|--|------------|------------|--|
| Ø   | Class 1   | Class 2              | Class 5    | Class 1                                      | Class 2    | Class 5    |  |
|     | Consists of 1 ea. of items #2, 6, 10, 112, & 12 |                      |            | Consists of 1 ea. of items #6, 10, 112, & 12 |            |            |  |
| 12  | RGCHE01201                                      | RGCHE01202           | RGCHE01205 | RKCHE01201                                   | RKCHE01202 | RKCHE01205 |  |
| 14  | RGCHE01401                                      | RGCHE01402           | RGCHE01405 | RKCHE01401                                   | RKCHE01402 | RKCHE01405 |  |
| 18  | RGCHE01801                                      | RGCHE01802           | RGCHE01805 | RKCHE01801                                   | RKCHE01802 | RKCHE01805 |  |
| 22  | RGCHE02201                                      | RGCHE02202           | RGCHE02205 | RKCHE02201                                   | RKCHE02202 | RKCHE02205 |  |
| 28  | RGCHE02801                                      | RGCHE02802           | RGCHE02805 | RKCHE02801                                   | RKCHE02802 | RKCHE02805 |  |
| 36  | RGCHE03601                                      | RGCHE03602           | RGCHE03605 | RKCHE03601                                   | RKCHE03602 | RKCHE03605 |  |
| 45  | RGCHE04501                                      | RGCHE04502           | RGCHE04505 | RKCHE04501                                   | RKCHE04502 | RKCHE04505 |  |
| 56  | RGCHE05601                                      | RGCHE05602           | RGCHE05605 | RKCHE05601                                   | RKCHE05602 | RKCHE05605 |  |

<sup>&</sup>lt;sup>1</sup>Pilot gland is required for AN, CA, CN, J, MN and TN mounting styles. For Gland Kit with pilot change 'CHEO' in kit number to 'CHEP'. E.g. RGCHEP1201.


#### Complete Seal Kits for Series CHE & CHD

| Bore | Class 1  | Class 2    | Class 5    | G             | land & Cap Torq | ue Specification | ıs              |
|------|--|------------|------------|---------------|-----------------|------------------|-----------------|
| Ø    | Consists of 1 ea. of items #10, 112, 13, 14, 16 & 2 ea. of items #6 & 12 |            |            | Serie         | s CHE           | Series           | s CHD           |
| 20   | SKCHE02001   | SKCHE02002 | SKCHE02005 | 17 - 18 N-m   | 155 - 162 lb-in | 27 - 28 N-m      | 20 - 21 lb-ft   |
| 25   | SKCHE02501   | SKCHE02502 | SKCHE02505 | 31 - 32 N-m   | 23 - 24 lb-ft   | 47 - 49 N-m      | 35 - 36 lb-ft   |
| 32   | SKCHE03201   | SKCHE03202 | SKCHE03205 | 68 - 71 N-m   | 50 - 52 lb-ft   | 98 - 102 N-m     | 72 - 75 lb-ft   |
| 40   | SKCHE04001   | SKCHE04002 | SKCHE04005 | 129 - 135 N-m | 95 - 99 lb-ft   | 169 - 177 N-m    | 125 - 131 lb-ft |
| 50   | SKCHE05001   | SKCHE05002 | SKCHE05005 | 203 - 213 N-m | 150 - 157 lb-ft | 285 - 299 N-m    | 210 - 220 lb-ft |
| 63   | SKCHE06301   | SKCHE06302 | SKCHE06305 | 305 - 320 N-m | 225 - 236 lb-ft | 488 - 512 N-m    | 360 - 378 lb-ft |
| 80   | SKCHE08001   | SKCHE08002 | SKCHE08005 | 576 - 604 N-m | 425 - 446 lb-ft | 881 - 925 N-m    | 650 - 682 lb-ft |
| 100  | SKCHE10001   | SKCHE10002 | SKCHE10005 | 881 - 925 N-m | 650 - 682 lb-ft | _                | _               |

<sup>&</sup>lt;sup>2</sup> Class 5 kits for 32-100mm bores and 18-56mm rods include a PTFE Back-up washer for the rod seal. Class 2 kits for all bores and all rods include an active rod seal back-up washer.

#### **Spanner Hole Dimensions Gland & Cap Spanners**

| Bore<br>Ø | СС    | DD    | FF<br>Ø | ТН           | TP |
|-----------|-------|-------|---------|--------------|----|
| 20        | 2.25  | 2.25  | 22      | _            | -  |
| 25        | 3.25  | 3.25  | 25      | _            | _  |
| 32        | 4.25  | 4.25  | 30      | M3x0.5 - 6H  | 6  |
| 40        | 5.25  | 5.25  | 35      | M4x0.7 - 6H  | 7  |
| 50        | 6.38  | 6.25  | 45      | M5x0.8 - 6H  | 7  |
| 63        | 8.38  | 8.25  | 55      | M6x1 - 6H    | 8  |
| 80        | 10.50 | 10.50 | 70      | M8x1.25 - 6H | 9  |
| 100       | 10.50 | 10.50 | 85      | M8x1.25 - 6H | 9  |

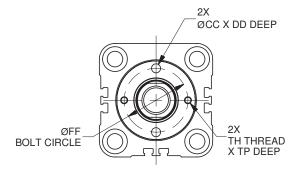



#### Safety Guide for Selecting and Using Hydraulic, Pneumatic Cylinders and Their Accessories

WARNING:  $\triangle$  FAILURE OF THE CYLINDER, ITS PARTS, ITS MOUNTING, ITS CONNECTIONS TO OTHER OBJECTS, OR ITS CONTROLS CAN RESULT IN:

- Unanticipated or uncontrolled movement of the cylinder or objects connected to it.
- Falling of the cylinder or objects held up by it.
- Fluid escaping from the cylinder, potentially at high velocity.

THESE EVENTS COULD CAUSE DEATH OR PERSONAL INJURY BY, FOR EXAMPLE, PERSONS FALLING FROM HIGH LOCATIONS, BEING CRUSHED OR STRUCK BY HEAVY OR FAST MOVING OBJECTS, BEING PUSHED INTO DANGEROUS EQUIPMENT OR SITUATIONS, OR SLIPPING ON ESCAPED FLUID.

Before selecting or using Parker Hannifin Corporation (the Company) cylinders or related accessories, it is important that you read, understand and follow the following safety information. Training is advised before selecting and using the Company's products.

#### 1.0 General Instructions

- 1.1 Scope This safety guide provides instructions for selecting and using (including assembling, installing, and maintaining) cylinder products. This safety guide is a supplement to and is to be used with the specific Company publications for the specific cylinder products that are being considered for use.
- 1.2 Fail Safe Cylinder products can and do fail without warning for many reasons. All systems and equipment should be designed in a fail-safe mode so that if the failure of a cylinder product occurs people and property won't be endangered.
- **1.3 Distribution** Provide a free copy of this safety guide to each person responsible for selecting or using cylinder products. Do not select or use the Company's cylinders without thoroughly reading and understanding this safety guide as well as the specific Company publications for the products considered or selected.
- 1.4 User Responsibility Due to very wide variety of cylinder applications and cylinder operating conditions, the Company does not warrant that any particular cylinder is suitable for any specific application. This safety guide does not analyze all technical parameters that must be considered in selecting a product. The hydraulic and pneumatic cylinders outlined in this catalog are designed to the Company's design guidelines and do not necessarily meet the design guideline of other agencies such as American Bureau of Shipping, ASME Pressure Vessel Code etc. The user, through its own

analysis and testing, is solely responsible for:

- Making the final selection of the cylinders and related accessories.
- Determining if the cylinders are required to meet specific design requirements as required by the Agency(s) or industry standards covering the design of the user's equipment.
- Assuring that the user's requirements are met, OSHA requirements are met, and safety guidelines from the applicable agencies such as but not limited to ANSI are followed and that the use presents no health or safety hazards.
- Providing all appropriate health and safety warnings on the equipment on which the cylinders are used.
- **1.5 Additional Questions** Call the appropriate Company technical service department if you have any questions or require any additional information. See the Company publication for the product being considered or used, or call 1-847-298-2400, or go to <a href="www.parker.com">www.parker.com</a>, for telephone numbers of the appropriate technical service department.

#### 2.0 Cylinder and Accessories Selection

**2.1 Seals** – Part of the process of selecting a cylinder is the selection of seal compounds. Before making this selection, consult the "seal information page(s)" of the publication for the series of cylinders of interest.

The application of cylinders may allow fluids such as cutting fluids, wash down fluids etc. to come in contact with the external area of the cylinder. These fluids may attack the piston rod wiper and or the primary seal and must be taken into account when selecting and specifying seal compounds

Dynamic seals will wear. The rate of wear will depend on many operating factors. Wear can be rapid if a cylinder is mis-aligned or if the cylinder has been improperly serviced. The user must take seal wear into consideration in the application of cylinders.

- **2.2 Piston Rods** Possible consequences of piston rod failure or separation of the piston rod from the piston include, but are not limited to are:
- · Piston rod and or attached load thrown off at high speed.
- · High velocity fluid discharge.
- Piston rod extending when pressure is applied in the piston retract mode.

Piston rods or machine members attached to the piston rod may move suddenly and without warning as a consequence of other conditions

occurring to the machine such as, but not limited to:

- · Unexpected detachment of the machine member from the piston rod.
- Failure of the pressurized fluid delivery system (hoses, fittings, valves, pumps, compressors) which maintain cylinder position.
- Catastrophic cylinder seal failure leading to sudden loss of pressurized fluid.
- · Failure of the machine control system.

Follow the recommendations of the "Piston Rod Selection Chart and Data" in the publication for the series of cylinders of interest. The suggested piston rod diameter in these charts must be followed in order to avoid piston rod buckling.

Piston rods are not normally designed to absorb bending moments or loads which are perpendicular to the axis of piston rod motion. These additional loads can cause the piston rod to fail. If these types of additional loads are expected to be imposed on the piston rod, their magnitude should be made known to our engineering department.

The cylinder user should always make sure that the piston rod is securely attached to the machine member.

On occasion cylinders are ordered with double rods (a piston rod extended from both ends of the cylinder). In some cases a stop is threaded on to one of the piston rods and used as an external stroke adjuster. On occasions spacers are attached to the machine member connected to the piston rod and also used as a stroke adjuster. In both cases the stops will create a pinch point and the user should consider appropriate use of guards. If these external stops are not perpendicular to the mating contact surface, or if debris is trapped between the contact surfaces, a bending moment will be placed on the piston rod, which can lead to piston rod failure. An external stop will also negate the effect of cushioning and will subject the piston rod to impact loading. Those two (2) conditions can cause piston rod failure. Internal stroke adjusters are available with and without cushions. The use of external stroke adjusters should be reviewed with our engineering department

The piston rod to piston and the stud to piston rod threaded connections are secured with an anaerobic adhesive. The strength of the adhesive decreases with increasing temperature. Cylinders which can be exposed to temperatures above  $+250^{\circ}F(+121^{\circ}C)$  are to be ordered with a non studded piston rod and a pinned piston to rod joint.

**2.3 Cushions** – Cushions should be considered for cylinder applications when the piston velocity is expected to be over 4 inches/second.

Cylinder cushions are normally designed to absorb the energy of a linear applied load. A rotating mass has considerably more energy than the same mass moving in a linear mode. Cushioning for a rotating mass application should be reviewed by our engineering department.

**2.4 Cylinder Mountings** – Some cylinder mounting configurations may have certain limitations such as but not limited to minimum stroke for side or foot mounting cylinders or pressure de-ratings for certain mounts. Carefully review the catalog for these types of restrictions.

Always mount cylinders using the largest possible high tensile alloy steel socket head cap screws that can fit in the cylinder mounting holes and torque them to the manufacturer's recommendations for their size.

**2.5 Port Fittings** – Hydraulic cylinders applied with meter out or deceleration circuits are subject to intensified pressure at piston rod end.

The rod end pressure is approximately equal to:

operating pressure x effective cap end area effective rod end piston area

Contact your connector supplier for the pressure rating of individual connectors.

#### 3.0 Cylinder and Accessories Installation and Mounting

#### 3.1 Installation

3.1.1 – Cleanliness is an important consideration, and cylinders are shipped with the ports plugged to protect them from contaminants entering the ports. These plugs should not be removed until the piping is to be installed. Before making the connection to the cylinder ports, piping should be thoroughly cleaned to remove all chips or burrs which might have resulted from threading or flaring operations.



### Cylinder Safety Guide

## Compact Hydraulic Cylinders Series CHE / CHD

- 3.1.2 Cylinders operating in an environment where air drying materials are present such as fast-drying chemicals, paint, or weld splatter, or other hazardous conditions such as excessive heat, should have shields installed to prevent damage to the piston rod and piston rod seals
- 3.1.3 Proper alignment of the cylinder piston rod and its mating component on the machine should be checked in both the extended and retracted positions. Improper alignment will result in excessive rod gland and/or cylinder bore wear. On fixed mounting cylinders attaching the piston rod while the rod is retracted will help in achieving proper alignment.
- 3.1.4 Sometimes it may be necessary to rotate the piston rod in order to thread the piston rod into the machine member. This operation must always be done with zero pressure being applied to either side of the piston. Failure to follow this procedure may result in loosening the piston to rod-threaded connection. In some rare cases the turning of the piston rod may rotate a threaded piston rod gland and loosen it from the

cylinder head. Confirm that this condition is not occurring. If it does, re-tighten the piston rod gland firmly against the cylinder head.

For double rod cylinders it is also important that when attaching or detaching the piston rod from the machine member that the torque be applied to the piston rod end of the cylinder that is directly attaching to the machine member with the opposite end unrestrained. If the design of the machine is such that only the rod end of the cylinder opposite to where the rod attaches to the machine member can be rotated, consult the factory for further instructions.

#### 3.2 Mounting Recommendations

- 3.2.1 Always mount cylinders using the largest possible high tensile alloy steel socket head screws that can fit in the cylinder mounting holes and torque them to the manufacturer's recommendations for their size
- **3.2.2** Side-Mounted Cylinders In addition to the mounting bolts, cylinders of this type should be equipped with thrust keys or dowel pins located so as to resist the major load.
- **3.2.3** Tie Rod Mounting Cylinders with tie rod mountings are recommended for applications where mounting space is limited. The standard tie rod extension is shown as BB in dimension tables. Longer or shorter extensions can be supplied. Nuts used for this mounting style should be torqued to the same value as the tie rods for that bore size.
- **3.2.4** Flange Mount Cylinders The controlled diameter of the rod gland extension on head end flange mount cylinders can be used as a pilot to locate the cylinders in relation to the machine. After alignment has been obtained, the flanges may be drilled for pins or dowels to prevent shifting.
- **3.2.5** Trunnion Mountings Cylinders require lubricated bearing blocks with minimum bearing clearances. Bearing blocks should be carefully aligned and rigidly mounted so the trunnions will not be subjected to bending moments. The rod end should also be pivoted with the pivot pin in line and parallel to axis of the trunnion pins.
- 3.2.6 Clevis Mountings Cylinders should be pivoted at both ends with centerline of pins parallel to each other. After cylinder is mounted, be sure to check to assure that the cylinder is free to swing through its working arc without interference from other machine parts.

#### 4.0 Cylinder and Accessories Maintenance, Troubleshooting and Replacement

- **4.1 Storage** At times cylinders are delivered before a customer is ready to install them and must be stored for a period of time. When storage is required the following procedures are recommended.
  - **4.1.1** Store the cylinders in an indoor area which has a dry, clean and noncorrosive atmosphere. Take care to protect the cylinder from both internal corrosion and external damage.
  - 4.1.2 Whenever possible cylinders should be stored in a vertical position (piston rod up). This will minimize corrosion due to possible condensation which could occur inside the cylinder. This will also minimize seal damage.
  - 4.1.3 Port protector plugs should be left in the cylinder until the time of installation.
  - **4.1.4** If a cylinder is stored full of hydraulic fluid, expansion of the fluid due to temperature changes must be considered. Installing a check valve with free flow out of the cylinder is one method.
  - 4.1.5 When cylinders are mounted on equipment that is stored outside for extended periods, exposed unpainted surfaces, e.g. piston rod, must be coated with a rust-inhibiting compound to prevent corrosion.

#### 4.2 Cylinder Trouble Shooting

#### 4.2.1 - External Leakage

**4.2.1.1** – Rod seal leakage can generally be traced to worn or damaged seals. Examine the piston rod for dents, gouges or score marks, and replace piston rod if surface is rough.

Rod seal leakage could also be traced to gland wear. If clearance is excessive, replace rod bushing and seal. Rod seal leakage can also be traced to seal deterioration. If seals are soft or gummy or brittle, check compatibility of seal material with lubricant used if air cylinder, or operating fluid if hydraulic cylinder. Replace with seal material, which is compatible with these fluids. If the seals are hard or have lost elasticity, it is usually due to exposure to temperatures in excess of 165°F. (+74°C). Shield the cylinder from the heat source to limit temperature to 350°F. (+177°C.) and replace with fluorocarbon seals.

**4.2.1.2** – Cylinder body seal leak can generally be traced to loose tie rods. Torque the tie rods to manufacturer's recommendation for that bore size.

Excessive pressure can also result in cylinder body seal leak. Determine maximum pressure to rated limits. Replace seals and retorque tie rods as in paragraph above. Excessive pressure can also result in cylinder body seal leak. Determine if the pressure rating of the cylinder has been exceeded. If so, bring the operating pressure down to the rating of the cylinder and have the tie rods replaced.

Pinched or extruded cylinder body seal will also result in a leak. Replace cylinder body seal and retorque as in paragraph above.

Cylinder body seal leakage due to loss of radial squeeze which shows up in the form of flat spots or due to wear on the O.D. or I.D. – Either of these are symptoms of normal wear due to high cycle rate or length of service. Replace seals as per paragraph above

#### 4.2.2 - Internal Leakage

- **4.2.2.1** Piston seal leak (by-pass) 1 to 3 cubic inches per minute leakage is considered normal for piston ring construction. Virtually no static leak with lipseal type seals on piston should be expected. Piston seal wear is a usual cause of piston seal leakage. Replace seals as required.
- **4.2.2.2** With lipseal type piston seals excessive back pressure due to over-adjustment of speed control valves could be a direct cause of rapid seal wear. Contamination in a hydraulic system can result in a scored cylinder bore, resulting in rapid seal wear. In either case, replace piston seals as required.
- **4.2.2.3** What appears to be piston seal leak, evidenced by the fact that the cylinder drifts, is not always traceable to the piston. To make sure, it is suggested that one side of the cylinder piston be pressurized and the fluid line at the opposite port be disconnected. Observe leakage. If none is evident, seek the cause of cylinder drift in other component parts in the circuit.

#### 4.2.3 - Cylinder Fails to Move the Load

- **4.2.3.1** Pneumatic or hydraulic pressure is too low. Check the pressure at the cylinder to make sure it is to circuit requirements.
- **4.2.3.2** Piston Seal Leak Operate the valve to cycle the cylinder and observe fluid flow at valve exhaust ports at end of cylinder stroke. Replace piston seals if flow is excessive.
- ${\bf 4.2.3.3}-{\rm Cylinder}\ {\rm is}\ {\rm undersized}\ {\rm for}\ {\rm the}\ {\rm load}-{\rm Replace}\ {\rm cylinder}$  with one of a larger bore size.

#### 4.3 Erratic or Chatter Operation

- **4.3.1** Excessive friction at rod gland or piston bearing due to load misalignment Correct cylinder-to-load alignment.
- **4.3.2** Cylinder sized too close to load requirements Reduce load or install larger cylinder.
- 4.3.3 Erratic operation could be traced to the difference between static and kinetic friction. Install speed control valves to provide a back pressure to control the stroke.
- **4.4 Cylinder Modifications, Repairs, or Failed Component** Cylinders as shipped from the factory are not to be disassembled and or modified. If cylinders require modifications, these modifications must be done at company locations or by the Company's certified facilities. The Cylinder Division Engineering Department must be notified in the event of a mechanical fracture or permanent deformation of any cylinder component (excluding seals). This includes a broken piston rod, tie rod, mounting accessory or any other cylinder component. The notification should include all operation and application details. This information will be used to provide an engineered repair that will prevent recurrence of the failure.

It is allowed to disassemble cylinders for the purpose of replacing seals or seal assemblies. However, this work must be done by strictly following all the instructions provided with the seal kits.



### **Manufacturing Locations**

#### **Regional Plants**

#### California

221 Helicopter Circle Corona, CA 92880 Tel.: (951) 280-3800

Fax: (951) 280-3808 Fax: (800) 869-9886

#### Georgia

1300 Six Flags Road Lithia Springs, GA 30122 Tel.: (770) 819-3400 Fax: (800) 437-3498

#### Indiana

Goodland Plant 715 South Iroquois Street Goodland, IN 47948 Tel.: (219) 297-3182

Fax: (800) 328-8120

#### Michigan

900 Plymouth Road Plymouth, MI 48170 Tel.: (734) 455-1700 Fax: (734) 455-1007

#### Oregon

29289 Airport Road Eugene, OR 97402-0079 Tel.: (541) 689-9111

Fax: (541) 688-6771 Fax: (800) 624-7996



#### Catalog HY08-SB1137-8/NA

#### Offer of Sale

## Compact Hydraulic Cylinders **Series CHE / CHD**

The items described in this document and other documents and descriptions provided by Parker Hannifin Corporation, its subsidiaries and its authorized distributors ("Seller") are hereby offered for sale at prices to be established by Seller. This offer and its acceptance by any customer ("Buyer") shall be governed by all of the following Terms and Conditions. Buyer's order for any item described in its document, when communicated to Seller verbally, or in writing, shall constitute acceptance of this offer. All goods, services or work described will be

- 1. Terms. All sales of Products by Seller will be governed by, and are expressly conditioned upon Buyer's assent to, these Terms. These Terms are incorporated into any Quote provided by Seller to Buyer. Buyer's order for any Products whether communicated to Seller verbally, in writing, by electronic data interface or other electronic commerce, shall constitute acceptance of these Terms. Seller objects to any contrary or additional terms or conditions of Buyer. Reference in Seller's order acknowledgement to Buyer's purchase order or purchase order number shall in no way constitute an acceptance of any of Buyer's terms or conditions of purchase. Any Quote made by Seller to Buyer shall be considered a firm and definite offer and shall not be deemed to be otherwise despite any language on the face of the Quote. Seller reserves all rights to accept or reject any purported acceptance by Buyer to Seller's Quote if such purported acceptance attempts to vary the terms of the Quote. If Seller ships Products after Buyer issues an acceptance to the Quote, any additional or different terms proposed by Buyer will not become part of the parties' business relationship unless agreed to in a writing that is signed by an authorized representative of Seller, excluding email correspondence. If the transaction proceeds without such agreement on the part of Seller, the business relationship will be governed solely by these Terms and the specific terms in Seller's Quote.
- 2. Price; Payment. The Products set forth in the Quote are offered for sale at the prices indicated in the Quote. Unless otherwise specifically stated in the Quote, prices are valid for thirty (30) days and do not include any sales, use, or other taxes or duties. Seller reserves the right to modify prices for any reason and at any time by giving ten (10) days prior written notice. Unless otherwise specified by Seller, all prices are F.C.A. Seller's facility (INCOTERMS 2020). All sales are contingent upon credit approval and full payment for all purchases is due thirty (30) days from the date of invoice (or such date as may be specified in the Quote). Under any circumstances, Buyer may not withhold or suspend payment of any amounts due and payable as a deduction, set-off or recoupment of any amount, claim or dispute with Seller. Ungaid invoices beyond the specified payment date incur interest at the rate of 1.5% per month or the maximum allowable rate under applicable law. Seller serves the right to require advance payment or provision of securities for first and subsequent deliveries if there is any doubt, in Seller's sole determination, regarding the Buyer's creditworthiness or for other business reasons. If the requested advance payment or securities are not provided to Seller's satisfaction, Seller reserves the right to suspend performance or reject the purchase order, in whole or in part, without prejudice to Seller's other rights or remedies, including the right to full compensation. Seller may revoke or shorten any payment periods previously granted in Seller's sole determination. The rights and remedies herein reserved to Seller are cumulative and in addition to any other or further rights and remedies available at law or in equity. No waiver by Seller of any breach by Buyer of any provision of these terms will constitute a waiver by Seller of any other breach of such provision.
- 3. Shipment; Delivery; Title and Risk of Loss. All delivery dates are approximate, and Seller is not responsible for damages or additional costs resulting from any delay. All deliveries are subject to our ability to procure materials from our suppliers. Regardless of the manner of shipment, delivery occurs and title and risk of loss or damage pass to Buyer, upon placement of the Products with the carrier at Seller's facility. Unless otherwise agreed prior to shipment and for domestic delivery locations only, Seller will select and arrange, at Buyer's sole expense, the carrier and means of delivery. When Seller selects and arranges the carrier and means of delivery, freight and insurance costs for shipment to the designated delivery location will be prepaid by Seller and added as a separate line item to the invoice. Buyer shall be responsible for any additional shipping charges incurred by Seller due to Buyer's acts or omissions. Buyer shall not return or repackage any Products without the prior written authorization from Seller, and any return shall be at the sole cost and expense of Buyer.
- 4. Warranty. The warranty for the Products is as follows: (i) Goods are warranted against defects in material or workmanship for a period of eighteen (18) months from the date of delivery or 2,000 hours of use, whichever occurs first; (ii) Services shall be performed in accordance with generally accepted practices and using the degree of care and skill that is ordinarily exercised and customary in the field to which the Services pertain and are warranted for a period of six (6) months from the date of compelition of the Services; and (iii) Software is only warranted to perform in accordance with applicable specifications provided by Seller to Buyer for ninety (90) days from the date of delivery or, when downloaded by a Buyer or end-user, from the date of the initial download. All prices are based upon the exclusive limited warranty stated above, and upon the following disclaimer: EXEMPTION CLAUSE; DISCLAIMER OF WARRANTY, CONDITIONS, REPRESENTATIONS: THIS WARRANTY IS THE SOLE AND ENTIRE WARRANTY, CONDITION, AND REPRESENTATIONS, WHETHER STATUTORY, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THOSE RELATING TO DESIGN, NONINFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE. SELLER DOES NOT WARRANT THAT THE SOFTWARE IS ERROR-FREE OR FAULT-TOLERANT, OR THAT BUYER'S USE THEREOF WILL BE SECURE OR UNINTERRUPTED, UNILESS OTHERWISE AUTHORIZED IN WRITING BY SELLER, THE SOFTWARE SHALL NOT BE USED IN CONNECTION WITH HAZARDOUS OR HIGH-RISK ACTIVITIES OR ENVIRONMENTS. EXCEPT AS EXPRESSLY STATED HEREIN, ALL PRODUCTS ARE PROVIDED
- 5. Claims; Commencement of Actions. Buyer shall promptly inspect all Products upon receipt. No claims for shortages will be allowed unless reported to Seller within ten (10) days of delivery. Buyer shall notify Seller of any alleged breach of warranty within thirty (30) days after the date the non-conformance is or should have been discovered by Buyer. Any claim or action against Seller based upon breach of contract or any other theory, including tort, negligence, or otherwise must be commenced within twelve (12) months from the date of the alleged breach or other alleged event, without regard to the date of discovery.
- 6. LIMITATION OF LIABILITY. IN THE EVENT OF A BREACH OF WARRANTY, SELLER WILL, AT ITS OPTION, REPAIR OR REPLACE THE NON-CONFORMING PRODUCTS, RE-PERFORM THE SERVICES, OR REFUND THE PURCHASE PRICE PAID WITHIN A REASONABLE PERIOD OF TIME. IN NO EVENT IS SELLER LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES INCLUDING ANY LOSS OF REVENUE OR PROFITS, WHETHER BASED IN CONTRACT, TORT OR OTHER LEGAL THEORY. IN NO EVENT SHALL SELLER'S LIABILITY UNDER ANY CLAIM MADE BY BUYER EXCEED THE PURCHASE PRICE PAID FOR THE PRODUCTS.
- 7. Confidential Information. Buyer acknowledges and agrees that Confidential Information has been and will be received in confidence and will remain the property of Seller. Buyer further agrees that it will not use Seller's Confidential Information for any purpose other than for the benefit of Seller and shall return all such Confidential Information to Seller within thirty (30) days upon request.
- 8. Loss to Buyer's Property. Buyer's Property will be considered obsolete and may be destroyed by Seller after two (2) consecutive years have elapsed without Buyer ordering the Products manufactured using Buyer's Property. Also, Seller shall not be responsible for any loss or damage to Buyer's Property while it is in Seller's possession or control.
- 9. Special Tooling. Seller may impose a tooling charge for any Special Tooling. Special Tooling shall be and remain Seller's property. In no event will Buyer acquire any interest in the Special Tooling, even if such Special Tooling has been specially converted or adapted for manufacture of Goods for Buyer and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller has the right to alter, discard or otherwise dispose of any Special Tooling or other property owned by Seller in its sole determination at any time.
- 10. Security Interest. To secure payment of all sums due from Buyer, Seller retains a security interest in all Products delivered to Buyer and, Buyer's acceptance of these Terms is deemed to be a Security Agreement under the Uniform Commercial Code. Buyer authorizes Seller as its attorney to execute and file on Buyer's behalf all documents Seller deems necessary to perfect Seller's security interest.
- 11. User Responsibility. Buyer, through its own analysis and testing, is solely responsible for making the final selection of the Products and assuring that all performance, endurance, maintenance, safety and warning requirements of the application of the Products are met. Buyer must analyze all aspects of the application and follow applicable industry standards, specifications, and any technical information provided with the Quote or the Products, such as Seller's instructions, guides and specifications. If Seller provides options of or for Products based upon data or specifications provided by Buyer, Buyer is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the Products. In the event Buyer is not the end-user of the Products, Buyer will ensure such end-user complies with this paragraph.
- 12. Use of Products, Indemnity by Buyer. Buyer shall comply with all instructions, guides and specifications provided by Seller with the Quote or the Products. If Buyer uses or resells the Products in any way prohibited by Seller's instructions, guides or specifications, or Buyer acknowledges that any such use, resale, or non-compliance is at Buyer's sole risk. Further, Buyer shall indemnify, defend, and hold Seller harmless from any losses, claims, liabilities, damages, lawsuits, judgments and costs (including attorney fees and defense costs), whether for personal injury, property damage, intellectual property infringement or any other claim, arising out of or in connection with: (a) improper selection, design, specification, application, or any misuse of Products; (b) any act or omission, negligent or otherwise, of Buyer; (c) Seller's use of Buyer's Property, (d)

- damage to the Products from an external cause, repair or attempted repair by anyone other than Seller, failure to follow instructions, guides and specifications provided by Seller, use with goods not provided by Seller, or opening, modifying, deconstructing, tampering with or repackaging the Products; or (e) Buyer's failure to comply with these Terms, including any legal or administrative proceedings, collection efforts, or other actions arising from or relating to such failure to comply. Seller shall not indemnify Buyer under any circumstance except as otherwise provided in these Terms.
- 13. Cancellations and Changes. Buyer may not cancel or modify, including but not limited to movement of delivery dates for the Products, any order for any reason except with Seller's written consent and upon terms that will indemnify, defend and hold Seller harmless against all direct, incidental and consequential loss or damage and any additional expense. Seller, at any time, may change features, specifications, designs and availability of Products.
- 14. Assignment. Buyer may not assign its rights or obligations without the prior written consent of Seller
- 15. Force Majeure. Seller is not liable for delay or failure to perform any of its obligations by reason of any events or circumstances beyond its reasonable control. Such circumstances include without limitation: accidents, labor disputes or stoppages, government acts or orders, acts of nature, pandemics, epidemics, other widespread illness, or public health emergency, cyber related disruptions, cyber-attacks, ransomware sabotage, delays or failures in delivery from carriers or suppliers, shortages of materials, sudden increases in the price of raw materials or components, but downs or slowdowns affecting the supply of raw materials or components, or the transportation thereof, oil shortages or oil price increases, energy crisis, energy or fuel interruption, war (whether declared or not) or the serious threat of same, riots, rebellions, acts of terrorism, embargoes, fire or any reason whether similar to the foregoing or otherwise. Seller will resume performance as soon as practicable after the event of force majeure has been removed. All delivery dates affected by an event of force majeure shall be tolled for the duration of such event of force majeure and rescheduled for mutually agreed dates as soon as practicable after the event of force majeure acts existed to in the Seller's sole discretion. An event of force majeure shall not include financial distress, insolvency, bankruptcy, or other similar conditions affecting one of the parties, affiliates and/or sub-contractors. An event of force majeure in the meaning of these Ferms means any circumstances beyond Seller's control that permanently or temporarily hinders performance, even where that circumstance was already foreseen. Buyer shall not be entitled to cancel any orders following its claim of an event of force majeure.
- 16. Waiver and Severability. Failure to enforce any provision of these Terms will not invalidate that provision, nor will any such failure prejudice either party's right to enforce that provision in the future. Invalidation of any provision of these Terms shall not invalidate any other provision herein and, the remaining provisions will remain in full force and effect.
- 17. Duration. Unless otherwise stated in the Quote, any agreement governed by or arising from these Terms shall: (a) be for an initial duration of one (1) year; and (b) shall automatically renew for successive one-year terms unless terminated by Buyer with at least 180-days written notice to Seller or if Seller terminates the agreement pursuant to Section 19 of these Terms.
- 18. Termination. Seller may, without liability to Buyer, terminate any agreement governed by or arising from these Terms for any reason and at any time by giving Buyer thirty (30) days prior written notice. Seller may immediately terminate, in writing, if Buyer (a) breaches any provision of these Terms, (b) becomes or is deemed insolvent, (c) appoints or has appointed a trustee, receiver or custodian for all or any part of Buyer's property,(d) flies a petition for relief in bankruptcy on its own behalf, or one is filed against Buyer by a third party, (e) makes an assignment for the benefit of creditors; or (f) dissolves its business or liquidates all or a majority of its assets.
- 19. Ownership of Rights. Buyer agrees that (a) Seller (and/or its affiliates) owns or is the valid licensee of Seller's IP and (b) the furnishing of information, related documents or other materials by Seller to Buyer does not grant or transfer any ownership interest or license in or to Seller's IP to Buyer, unless expressly agreed in writing. Without limiting the foregoing, Seller retains ownership of all Software supplied to Buyer. In no event shall Buyer obtain any greater right in and to the Software than a right in a license limited to the use thereof and subject to compliance with any other terms provided with the Software. Buyer further agrees that it will not, directly or through intermedianes, reverse engineer, decompile, or disassemble any Software (including firmware) comprising or contained within a Product, except and only to the extent that such activity may be expressly permitted, either by applicable law or, in the case of open source software, the applicable open source license.
- 20. Indemnity for Infringement of Intellectual Property Rights. Seller is not liable for infringement of any Intellectual Property Rights except as provided in this Section. Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on a third-party claim that one or more of the Products infringes the Intellectual Property Rights of a third party in the country of delivery of the Products by Seller to Buyer. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of any such claim, and Seller having sole control over the defense of the claim including all negotiations for settlement or compromise. If one or more Products is subject to such a claim, Seller may, at its sole expense and option, procure for Buyer the right to continue using the Products, replace or modify the Products to render them non-infringing, or offer to accept return of the Products and retund the purchase price less a reasonable allowance for depreciation. Seller has no obligation or liability for any claim of infringement: (i) arising from information provided by Buyer (including Seller's use of Buyer's Property); or (ii) directed to any Products for which the designs are specified in whole or part by Buyer, or (iii) resulting from the modification, combination or use in a system of any Products. The foregoing provisions of this Section constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for claims of infringement of intellectual Property Rights.
- 21. Governing Law. These Terms, the terms of any Quote, and the sale and delivery of all Products are deemed to have taken place in, and shall be governed and construed in accordance with, the laws of the State of Ohio, as applicable to contracts executed and wholly performed therein and without regard to conflicts of laws principles. Buyer irrevocably agrees and consents to the exclusive jurisdiction and venue of the courts of Cuyahoga County, Ohio with respect to any dispute, controversy or claim arising out of or relating to the sale and delivery of the Products.
- 22. Entire Agreement. These Terms, along with the terms set forth in the Quote, forms the entire agreement between the Buyer and Seller and constitutes the final, complete and exclusive expression of the terms of sale and purchase. In the event of a conflict between any term set forth in the Quote and these Terms, the terms set forth in the Quote shall prevail. All prior or contenneous written or oral agreements or negotiations with respect to the subject matter shall have no effect. No modification to these Terms will be binding on Seller unless agreed to in a writing that is signed by an authorized representative of Seller, excluding email correspondence, 'clickwarp' or other purported electronic assent to different or additional terms. Sections 2-25 of these Terms shall survive termination or cancellation of any agreement governed by or arising from these Terms.
- 23. No 'Wrap' Agreements/No Authority to Bind. Seller's clicking any buttons or any similar action, such as clicking 'I Agree' or 'Confirm,' to utilize Buyer's software or webpage for the placement of orders, is NOT an agreement to Buyer's Terms and Conditions. NO EMPLOYEE, AGENT OR REPRESENTATIVE OF SELLER HAS THE AUTHORITY TO BIND SELLER BY THE ACT OF CLICKING ANY BUTTON OR SIMILAR ACTION ON BUYER'S WEBSITE OR PORTAL.
- 24. Compliance with Laws. Buyer agrees to comply with all applicable laws, regulations, and industry and professional standards, including those of the United States of America, and the country or countries in which Buyer may operate, including without limitation the U.S. Foreign Corrupt Practices Act ("FCPA"), the U.S. Anti-Kickback Act ("Anti-Kickback Act"), U.S. and E.U. export control and sanctions laws ("Export Laws"), the U.S. Food Drug and Cosmetic Act ("FDCA"), and the rules and regulations promulgated by the U.S. Food and Drug Administration ("FDA"), each as currently amended. Buyer agrees to indemnify, defend, and hold harmless Seller from the consequences or any violation of such laws, regulations and standards by Buyer, its employees or agents. Buyer represents that it is familiar with all applicable provisions of the FCPA, the Anti-Kickback Act, Export Laws, the FDCA and the FDA and certifies that Buyer will adhere to the requirements thereof and not take any action that would make Seller violate such requirements. Buyer represents and agrees that Buyer will not make any payment or give anything of value, directly or indirectly, to any governmental official, foreign political party or official thereof, candidate for foreign political office, or commercial entity or person, for any improper purpose, including the purpose of influencing such person to purchase Products or otherwise benefit the business of Seller. Buyer further represents and agrees that it will not receive, use, service, transfer or ship any Products from Seller in a manner or for a purpose that violates Export Laws or would cause Seller to be in violation of Export Laws. Buyer agrees to promptly and reliably provide Seller all requested information or documents, including end-user statements and other written assurances, concerning Buyer's ongoing compliance with Export Law. 9/22









## Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need. Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 1 800 C-Parker (1 800 272 7537).



#### **AEROSPACE**

#### **Key Markets**

- Aircraft engines
- Business & general aviation
- Commercial transports
- Land-based weapons systems
- Military aircraft
- Missilés & launch vehicles
- Regional transports
- Unmanned aerial vehicles

#### **Key Products**

- · Flight control systems & components
- Fluid conveyance systems
- · Fluid metering delivery & atomization devices
- Fuel systems & components
- Hydraulic systems & components Inert nitrogen generating systems
- Pneumatic systems & components
- Wheels & brakes



#### **CLIMATE CONTROL**

#### **Key Markets**

- Agriculture
- Air conditioning
- Food, beverage & dairy
- Life sciences & medical
- Precision cooling
- Processina
- Transportation

#### **Key Products**

- CO2 controls
- Electronic controllers
- Filter driers
- Hand shut-off valves
- Hose & fittings
- Pressure regulating valves
- Refrigerant distributors
- Safety relief valves
- Solenoid valves
- Thermostatic expansion valves



#### **ELECTROMECHANICAL**

#### **Key Markets**

- Aerospace
- Factory automation
- Food & beverage
- Life science & medical
- Machine tools
- Packaging machinery
- Paper machinery
- Plastics machinery & converting
- Primary metals
- Semiconductor & electronics
- Textile
- Wire & cable

#### **Key Products**

- AC/DC drives & systems
- Electric actuators
- Controllers
- Gantry robots
- Gearheads
- Human machine interfaces
- Industrial PCs Inverters
- Linear motors, slides and stages Precision stages
- Stepper motors Servo motors, drives & controls



#### **FILTRATION**

#### **Key Markets**

- Food & beverage
- Industrial machinery
- Life sciences
- Marine
- Mobile equipment
- Oil & gas
- Power generation
- Process Transportation

#### **Key Products**

- Analytical gas generators
- Compressed air & gas filters
- Condition monitoring
- Engine air, fuel & oil filtration & systems
- Hydraulic, lubrication & coolant filters
- Process, chemical, water & microfiltration filters
- Nitrogen, hydrogen & zero air generators



#### **FLUID & GAS HANDLING**

### **Key Markets**

- Aerospace
- Agriculture
- Bulk chemical handling
- Construction machinery
- Food & beverage
- Fuel & gas delivery
- Industrial machinery
- Mobile
- Oil & gas
- Welding
- Transportation

#### **Kev Products**

- Brass fittings & valves
- Diagnostic equipment Fluid conveyance systems
- Industrial hose
- PTFE & PFA hose, tubing & plastic fittings
- Rubber & thermoplastic hose & couplings
- Tube fittings & adapters
- Quick disconnects



#### **HYDRAULICS**

#### **Key Markets**

- Aerospace
- Agriculture Construction machinery
- Forestry
- Industrial machinery Mining
- Oil & gas
- Power generation & energy
- Truck hydraulics

#### **Key Products**

- Diagnostic equipment
- Hydraulic cylinders & accumulators
- Hydraulic motors & pumps
- Hydraulic systems Hydraulic valves & controls
- Power take-offs Rubber & thermoplastic hose
- & couplings Tube fittings & adapters Quick disconnects



#### **Key Markets**

- Aerospace Conveyor & material handling
- Life science & medical
- Machine tools

- Air preparation Compact cylinders
- Grippers


- Miniature fluidics
- Rotary actuators
- Tie rod cylinders



#### **PNEUMATICS**

- Factory automation
- Food & beverage
- Packaging machinery Transportation & automotive

- Field bus valve systems
- Guided cylinders
- Manifolds
- Pneumatic accessories
- Pneumatic actuators & grippers
- Pneumatic valves and controls Rodless cylinders
- Vacuum generators, cups & sensors



#### PROCESS CONTROL

- **Key Markets**
- Chemical & refining
- Food, beverage & dairy Medical & dental
- Microelectronics
- Oil & gas Power generation

- **Key Products**
- Analytical sample conditioning products & systems Fluoropolymer chemical delivery
- fittings, valves & pumps High purity gas delivery fittings, valves & regulators
- Instrumentation fittings, valves & regulators Medium pressure fittings & valves Process control manifolds



### **SEALING & SHIELDING**

### **Key Markets**

- Aerospace
- Chemical processing Consumer
- Energy, oil & gas
- Fluid power General industrial
- Information technology Life sciences

#### Military Semiconductor Telecommunications

- Transportation
- **Key Products** Dynamic seals
- Elastomeric o-rings EMI shielding Extruded & precision-cut,
- fabricated elastomeric seals Homogeneous & inserted
- elastomeric shapes
- High temperature metal seals
- Metal & plastic retained composite seals Thermal management



07/23 / Catalog HY08-SB1137-8/NA



Parker Hannifin Corporation **Cylinder and Accumulator Division**500 South Wolf Road

Des Plaines, IL 60016 USA
phone (847) 298-2400
fax (800) 892-1008
www.parker.com/schraderbellows