



Pump & Motor Division

PGP/PGM 500 Series Gear Pumps and Motors
in Single and Multiple Configurations



ENGINEERING YOUR SUCCESS.



WARNING — User Responsibility

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the "Offer of Sale".

© Copyright 2021, Parker Hannifin Corporation, All Rights Reserved



WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov



Table of Contents
PGP/PGM502

Characteristics	1
Specifications/Dimensions	2
Performance Charts	3
Drive Shafts/Shaft Load Capacity	4
Mounting Flanges	5
Port Options/Drain Position	6
Ordering Code	7
Ordering Example	8

PGP/PGM505

Characteristics	9
Specifications/Dimensions	10
Performance Charts	11
Drive Shafts/Shaft Load Capacity	12-13
Mounting Flanges	14
Port Options/Drain Positions	15
Ordering Code	16
Ordering Example	17

PGP/PGM511

Characteristics	18
Specifications/Dimensions	19
Performance Charts	20
Operating Conditions	21
Drive Shafts/Shaft Load Capacity	22-23
Mounting Flanges	24
Port Options/Drain Positions	25
Outboard Bearings	26
Ordering Code	27
Ordering Example	28

PGP/PGM517

Characteristics	29
Specifications/Dimensions	30
Performance Charts	31
Operating Conditions	32
Drive Shafts/Shaft Load Capacity	33
Mounting Flanges	34
Port Options/Drain Positions	35
Ordering Code	36
Ordering Example	37

Pump and Motor Valve Options	38
---	-----------

Pump Valve Options	39-42
---------------------------------	--------------

Motor Valve Options	43-47
----------------------------------	--------------

Reversing Options	48
--------------------------------	-----------

Offer of Sale	50-51
----------------------------	--------------



■ **Up to 280 bar continuous operation**

High strength materials and large journal diameters provide low bearing loads for high pressure operation.

■ **High efficiency**


Pressure balanced bearing blocks assure maximum efficiency under all operating conditions.

■ **Low noise**

9 tooth gear profile and optimized flow metering provide reduced pressure pulsation and exceptionally quiet operation.

■ **Application flexibility**

International mounts and connections, and common inlet multiple pump configurations provide unmatched design and application versatility.

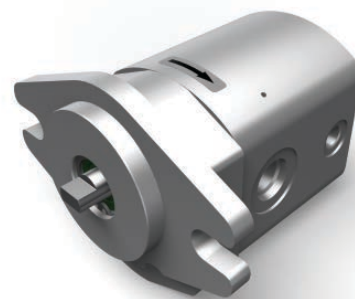

Product Features	Description
Pump Type	Pressure balanced, aluminum, external gear
Mounting	SAE, rectangular, thru-bolt standard, specials on request
Ports	SAE and metric split flanges and others
Shaft Style	Keyed, tapered, cylindrical tang drive, specials on request
Maximum Speed	500 - 5000 rpm, see Specifications
Theor. displacement	See Specifications
Drive	Drive direct with flexible coupling is recommended.
Inlet pressure	Operating range 0.8 to 2 bar abs. Min. inlet pressure 0.5 bar abs. Short time without load. Maximum suggested inlet flow velocity for pumps: 2.5 mps. Consultation is recommended.
Outlet pressure	See Specifications
Pressure rising rate	Max. 3000 bar/s
Hydraulic fluids	Hydraulic oil HLP, ISO, DIN 51524-2
Fluid viscosity	Range of operating viscosity 20 to 1000 mm ² /s. Max. permissible operating pressure dependent on viscosity. Viscosity range for cold start 1000 to 2000 mm ² /s at operating pressure $p \leq 10$ bar and speed $n \leq 1500$ rpm.




Product Features	Description
Fluid temperature	For NBR seals, range of operating temperature -40° to +80°C. For FKM seals, range of operating temperature -20° to +105°C. Max. permissible operating pressure dependent on fluid temperature. Temperature for cold start -20° to -15°C at speed ≤ 1500 rpm. Max. permissible operating pressure dependent on fluid temperature.
Filtration	According to ISO 4406 Cl. 19/17/13
Direction of rotation (looking at the drive shaft)	Clockwise or counter-clockwise. Attention! Drive pump only in indicated direction of rotation.
Multiple pump assemblies	- Available in two or three sections, limitations shown in the shaft loading rating table in this catalog. - Max. load is determined by adding the torque values for each pumping section that will be simultaneously loaded.
Separate or common inlet capability	Separate inlet configuration: - Each gear housing has individual inlet and outlet ports. Common inlet configuration: - Two gear sets share a common inlet.



WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

PGP/PGM502 Specifications

Code		0008	0012	0016	0021	0025	0033	0036	0043	0048	0058	0062	0079
Displacements	cm³/rev	0.8	1.2	1.6	2.1	2.5	3.3	3.6	4.3	4.8	5.8	6.2	7.9
	in³/rev	0.05	0.07	0.10	0.13	0.15	0.20	0.22	0.26	0.29	0.35	0.38	0.48
Continuous Pressure	bar	280	280	280	280	280	280	260	250	230	200	180	160
	psi	4061	4061	4061	4061	4061	4061	3771	3626	3336	2901	2611	2321
Minimum Speed @ Max. outlet pressure	rpm	500	500	500	500	500	500	500	500	500	500	500	500
Maximum Speed @ 0 Inlet & Max. outlet pressure	rpm	5000	5000	4500	4500	4000	4000	4000	3500	3000	3000	3000	3000
Input Power @ Max. Pressure and 1500 rpm	HP	1.10	1.48	1.88	2.28	2.68	3.35	3.49	3.49	3.22	3.75	3.89	4.02
	kW	0.82	1.1	1.4	1.7	2.0	2.5	2.6	2.6	2.4	2.8	2.9	3.0
Dimension L	mm	35.3	36.8	38.3	39.9	41.5	44.5	45.6	48.5	50.0	53.8	55.3	61.6
	in	1.39"	1.45"	1.51"	1.57"	1.63"	1.75"	1.80"	1.91"	1.97"	2.12"	2.18"	2.43"
Approximate Weight	lbs	2.43	2.43	2.43	2.43	2.65	2.65	2.65	2.87	3.09	3.09	3.31	3.53
	kg	1.10	1.10	1.10	1.10	1.20	1.20	1.20	1.30	1.40	1.40	1.50	1.60

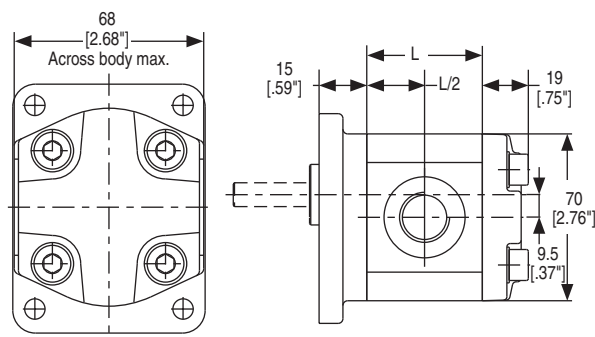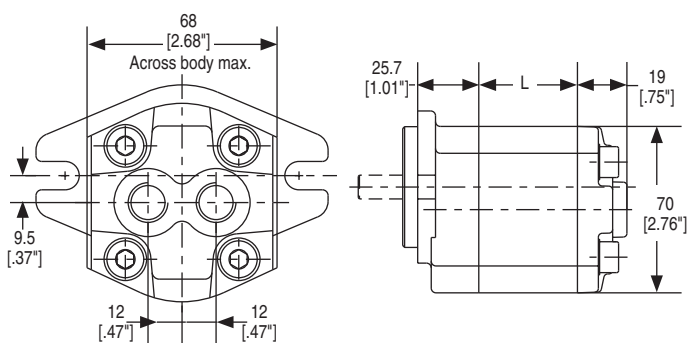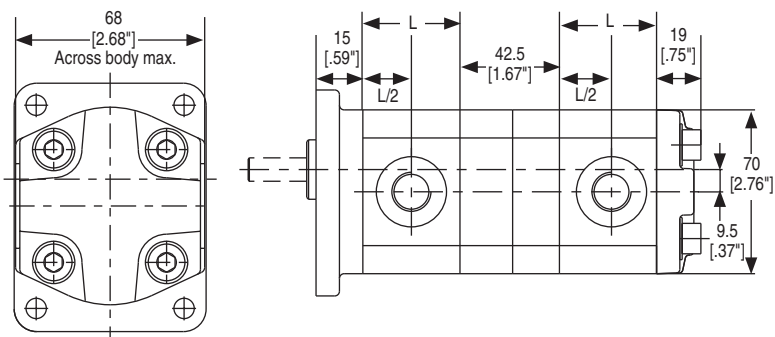PGP/PGM502 Dimensions**Single Unit****Single Unit with Rear Ports****Tandem Unit**


WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

PGP502 Performance Charts


PGP/PGM 500 Series

Single/Multiple Aluminum Pumps & Motors


0.8 CC

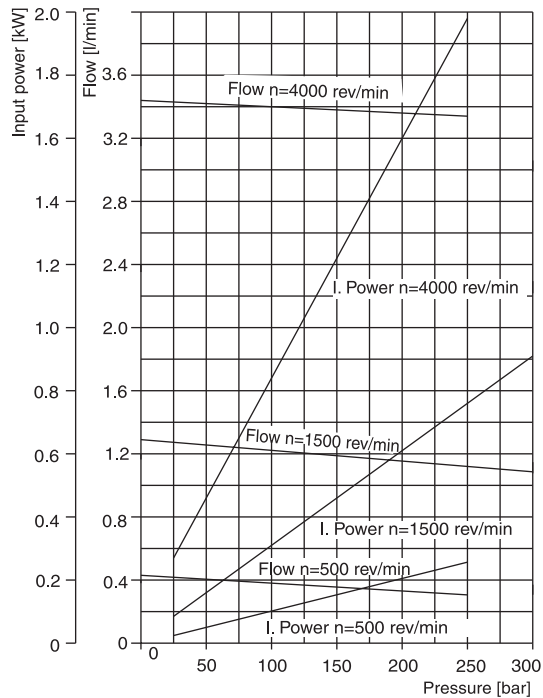


1.6 CC

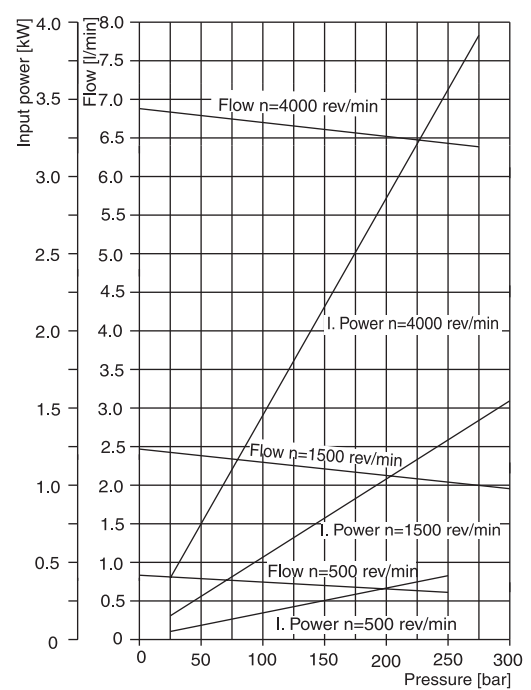

3.6 CC

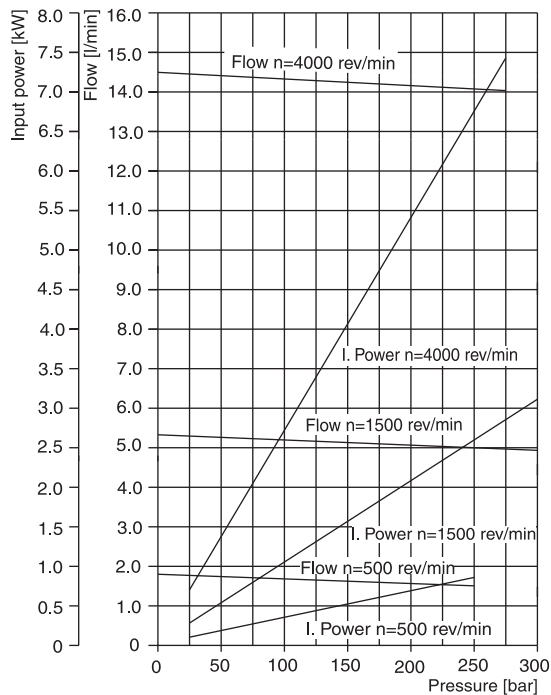

7.9 CC

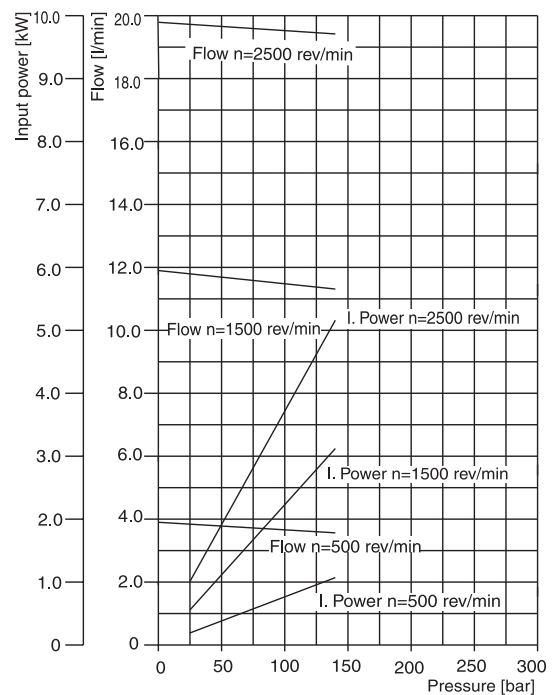


Fluid Temperature = $45 \pm 2^\circ\text{C}$
 Viscosity = $36 \text{ mm}^2/\text{s}$
 Inlet Pressure = $0.9 + 0.1 \text{ bar absolute}$



WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov



PGP/PGM502 Drive Shafts

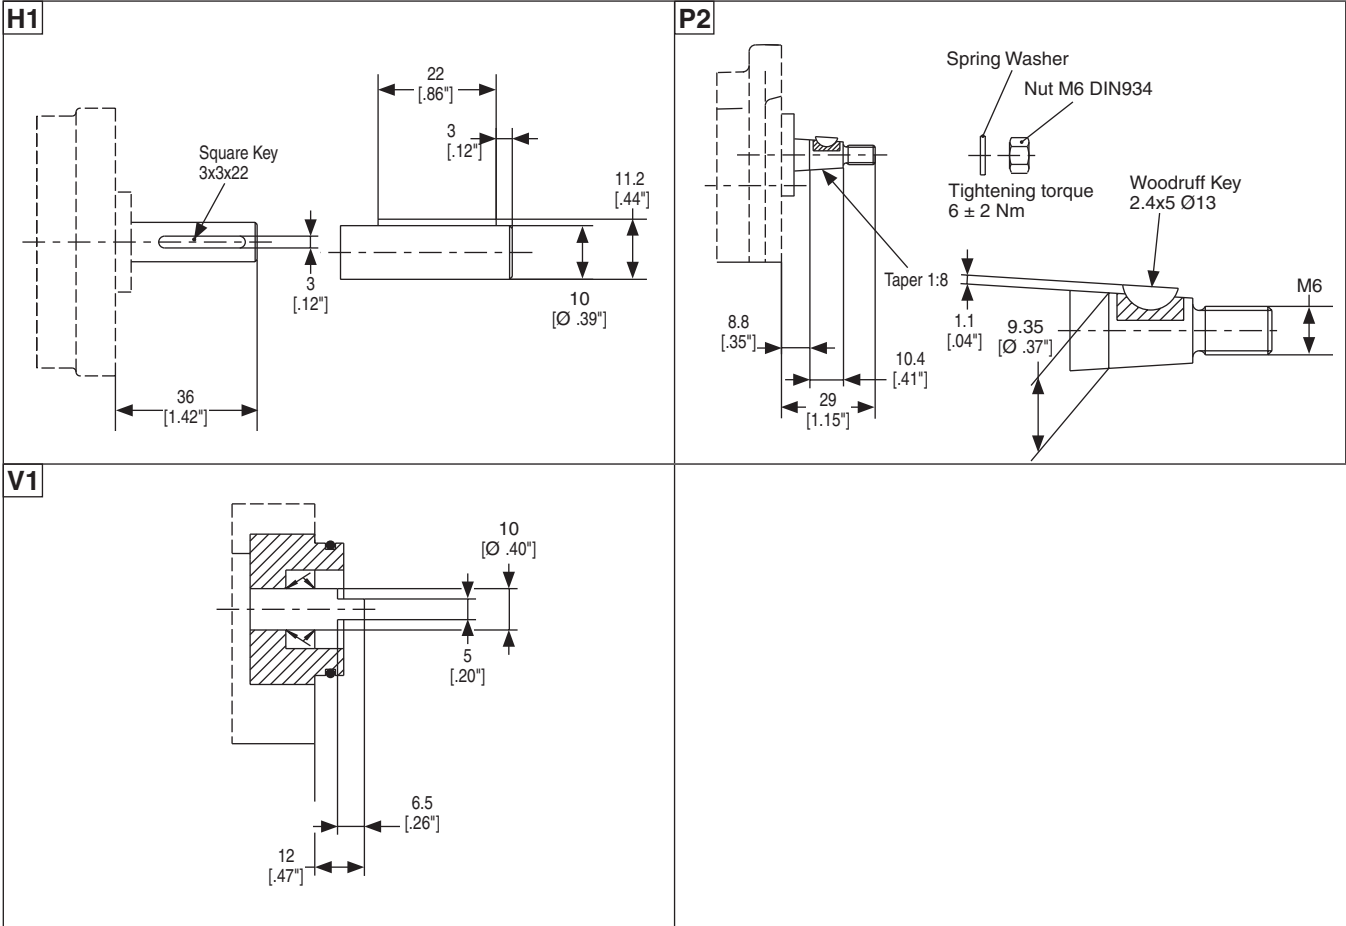


PGP/PGM502 Shaft Load Capacity

Code	Description	Torque Rating [Nm]
H1	Ø 10, 3.0 Key, no thread, 36L parallel	30
P2	Ø 9.35, 8.8L, 2.4 Key, M6 taper 1:8	30
V1	5 x 6.5 long shaft w/o coupling tang drive	20

Torque [Nm] = $\frac{\text{Displacement [cm}^3\text{/rev]} \times \text{Pressure [bar]}}{57.2}$


WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

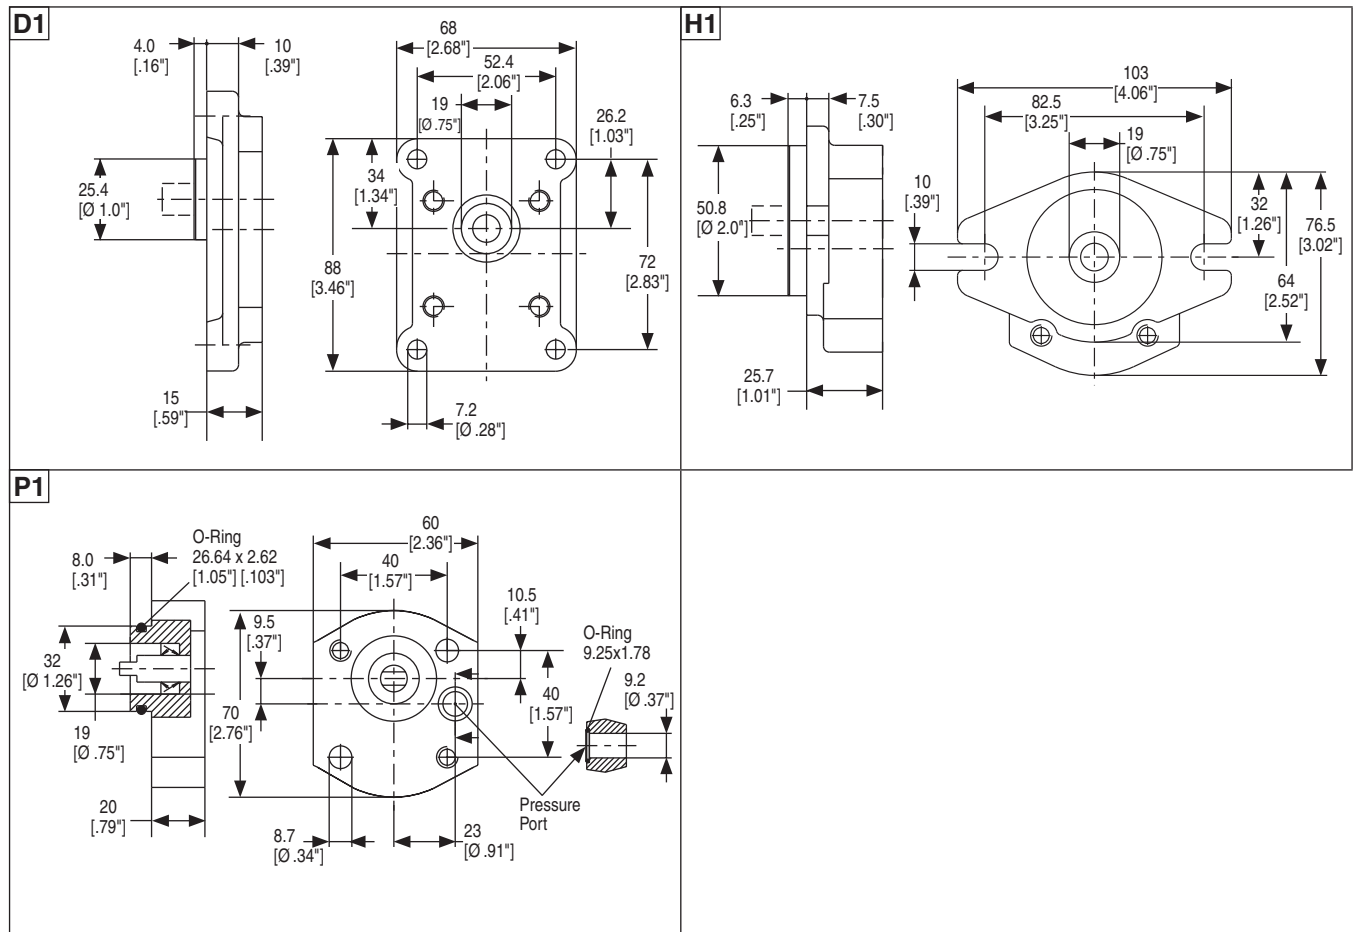

PGP/PGM502 Mounting Flanges**PGP/PGM 500 Series****Single/Multiple Aluminum Pumps & Motors**


WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

PGP/PGM502 Port Options

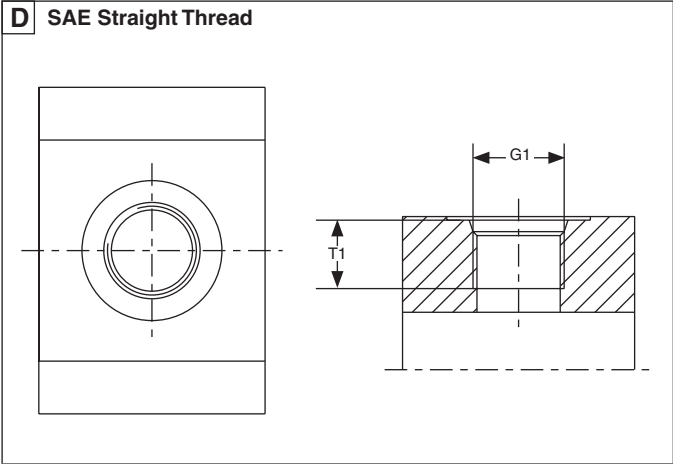

Code	SAE J1926-1 Dash Size	Nominal Tube OD	G1	T1
			Thread	Dimensions
D2	#6	3/8"	9/16" - 18 UNF	12.7 [0.50"]
D3	#8	1/2"	3/4" - 16 UNF	14.3 [0.56"]

PGP/PGM502 Drain Position

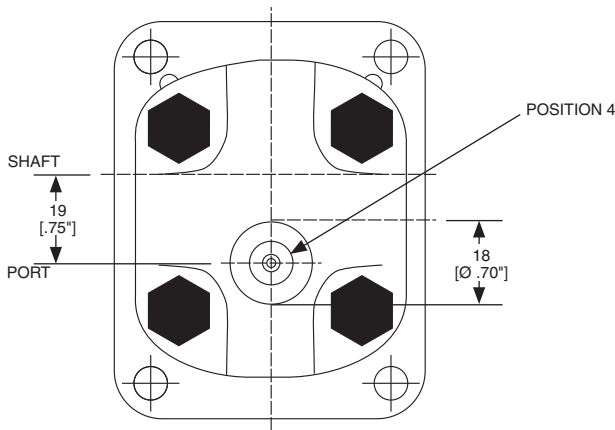

! WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

PG	1	502	2	3	4	5	6	7	8	8	8 ¹⁾	8 ¹⁾	9 ²⁾	10 ³⁾	12 ⁵⁾	502	2	3	7	8	8	11	3)	4)
----	---	-----	---	---	---	---	---	---	---	---	-----------------	-----------------	-----------------	------------------	------------------	-----	---	---	---	---	---	----	----	----

Code	1 – Type
P	Pump
M	Motor

Code	2 – Unit	
	Pump	Motor
A	Single unit	Standard Motor without checks
B	Multiple unit	Standard Motor with two checks
C	—	Standard Motor w/ one anti-cavitation check (ACC)
Option C MUST NOT HAVE A DRAIN		

3 – Displacement	
Code	ccm
0008	0.8
0012	1.2
0016	1.6
0021	2.1
0025	2.5
0033	3.3
0036	3.6
0043	4.3
0048	4.8
0058	5.8
0062	6.2
0079	7.9

Code	4 – Rotation
C	Clockwise
A	Counter-clockwise
B	Bi-directional

Code	5 – Shaft
H1	Ø 10, 3.0 Key, no thread, 36L, parallel
P2	Ø 9.35, 8.8L, 2.4 Key, M6, taper 1:8
V1	5 x 6.5 long shaft w/o coupling tang drive

Code	6 – Flange	Material
D1	52.2 x 72.0 - Ø 25.4 rectangular	Aluminum
H1	82.5 - Ø 50.8 SAE A-A 2-Bolt	Aluminum
P1	40.0 x 40.0 - Ø 32.0 w/ seal ported, thru bolt	Aluminum

Code	7 – Shaft Seal
X	No seal
N	NBR
V	FPM, FKM
Standard motor seals are rated for max 75 PSI	

Code	8 – Port Options
B1	No ports
D2	9/16" - 18 UNF thread
D3	3/4" - 16 UNF thread

Code	9 – Motor Drain Option
B1	No drain
P	M10X1 Metric-Thread

Code	10 – Drain Port Position
4	Rear drain

Code	11 – Section Connection
S	Separate inlets
C	Common inlets
No code for single unit	

Code	12 – Corrosion Protection
Z	Zinc coated (5)
P1	Black paint 100 hour salt spray
P4	Black paint 400 hour salt spray
No code for no protection	

Not all variances of ordering codes can be offered. Please check available part numbers first. For not yet implemented part numbers or special requests please contact Parker Hannifin.

- 1) Only coded for the last section.
- 2) Only for motors.
- 3) For further unit repeat displacement, shaft seal between section, side suction port, side pressure port, rear suction port, rear pressure port.
- 4) For adding built-in valves enter valve description at the end of the model code. Valve options described on pages 38-48.
- 5) Mounting flange and rear cover are in aluminum; Zinc coating for fasteners only.



WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov



PGP/PGM502 Ordering Example**PGP/PGM 500 Series****Single/Multiple Aluminum Pumps & Motors**

PGP	502	B	0062	C	P2	D1	N	D3	D2	S	502	A	0036	X	D3	D2	B1	B1
PGP	Gear Design / Type		Parker Gear Pump															
502	Series First Section																	
B	Unit		Tandem Unit															
0062	Displacement		6.2 cc/rev															
C	Rotation Direction		Clockwise															
P2	Drive Shaft		Taper 1:8															
D1	Mounting Flange Type		52.2 x 72.0 Rectangular															
N	Shaft Seal		NBR															
D3	Side Suction Port		3/4" - 16 UNF Thread															
D2	Side Pressure Port		9/16" - 18 UNF Thread															
S	Section Connection		Separate Inlets															
502	Series Second Section																	
A	Unit		Single Unit															
0036	Displacement		3.6 cc/rev															
X	Shaft Seal		No Shaft Seal															
D3	Side Suction Port		3/4" - 16 UNF Thread															
D2	Side Pressure Port		9/16" - 18 UNF Thread															
B1	Rear Suction Port		No Port															
B1	Rear Pressure Port		No Port															



WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov



■ **Up to 275 bar continuous operation**

High strength materials and large journal diameters provide low bearing loads for high pressure operation.

■ **High efficiency**


Pressure balanced bearing blocks assure maximum efficiency under all operating conditions.

■ **Low noise**

13 tooth gear profile and optimized flow metering provide reduced pressure pulsation and exceptionally quiet operation.

■ **Application flexibility**

International mounts and connections, integrated valve capabilities and common inlet multiple pump configurations provide unmatched design and application versatility.

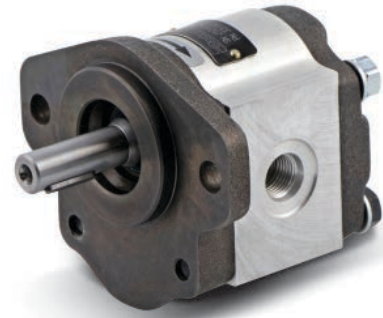

Product Features	Description
Pump Type	Pressure balanced, aluminum, external gear
Mounting	SAE, rectangular, thru-bolt standard specials on request
Ports	SAE and metric split flanges and others
Shaft Style	SAE splined, keyed, tapered, cylindrical tang drive, specials on request
Maximum Speed	500 - 4000 rpm, see Specifications
Theor. displacement	See Specifications
Drive	Drive direct with flexible coupling is recommended.
Axial / Radial load	Consult with product service for allowable loading.
Inlet pressure	Operating range 0.8 to 2 bar abs. Min. inlet pressure 0.5 bar abs. Short time without load. Maximum suggested inlet flow velocity for pumps: 2.5 mps. Consultation is recommended.
Outlet pressure	See Specifications
Pressure rising rate	Max. 3000 bar/s
Hydraulic fluids	Hydraulic oil HLP, ISO, DIN 51524-2
Fluid viscosity	Range of operating viscosity 20 to 1000 mm ² /s. Max. permissible operating pressure dependent on viscosity. Viscosity range for cold start 1000 to 2000 mm ² /s at operating pressure $p \leq 10$ bar and speed $n \leq 1500$ rpm.

Product Features	Description
Fluid temperature	For NBR seals, range of operating temperature -40° to +80°C. For FKM seals, range of operating temperature -20° to +105°C. Max. permissible operating pressure dependent on fluid temperature. Temperature for cold start -20° to -15°C at speed ≤ 1500 rpm. Max. permissible operating pressure dependent on fluid temperature.
Filtration	According to ISO 4406 Cl. 19/17/13
Direction of rotation (looking at the drive shaft)	Clockwise, counter-clockwise or double. Attention! Drive pump only in indicated direction of rotation.
Multiple pump assemblies	- Available in two or three sections; limitations shown in the shaft loading rating table in this catalogue. - Max. load is determined by adding the torque values for each pumping section that will be simultaneously loaded.
Separate or common inlet capability	Separate inlet configuration: - Each gear housing has individual inlet and outlet ports. Common inlet configuration: - Two gear sets share a common inlet.





WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

PGP/PGM505 Specifications



Code		0020	0030	0040	0050	0060	0070	0080	0090	0100	0110	0120
Displacements	cm ³ /rev	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0
	in ³ /rev	0.12	0.18	0.24	0.31	0.37	0.43	0.49	0.55	0.61	0.67	0.73
Continuous Pressure	bar	275	275	275	275	275	275	275	250	250	250	220
	psi	3988	3988	3988	3988	3988	3988	3988	3625	3625	3625	3190
Minimum Speed @ Max. outlet pressure	rpm	500	500	500	500	500	500	500	500	500	500	500
Maximum Speed @ 0 Inlet & Max. outlet pressure	rpm	4000	4000	4000	4000	3600	3300	3000	2800	2800	2400	2400
Input Power @ Max. Pressure and 1500 rpm	HP	2.15	3.08	4.02	5.10	6.03	7.11	8.05	8.45	9.25	10.19	10.06
	kW	1.6	2.3	3.0	3.8	4.5	5.3	6.0	6.3	6.9	7.6	7.5
Dimension L	mm	38.5	41.1	43.8	46.5	49.1	51.8	54.5	57.2	59.8	62.5	65.2
	in	1.52"	1.62"	1.72"	1.83"	1.93"	2.04"	2.15"	2.25"	2.35"	2.46"	2.57"
Approximate Weight	lbs	4.76	4.89	5.00	5.11	5.25	5.36	5.47	5.60	5.69	5.80	5.91
	kg	2.16	2.22	2.27	2.32	2.38	2.43	2.48	2.54	2.58	2.63	2.68

PGP/PGM505 Dimensions

Single Unit

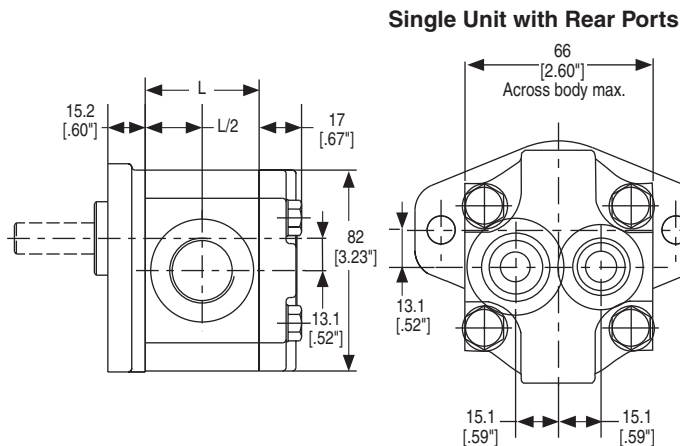

Tandem Unit

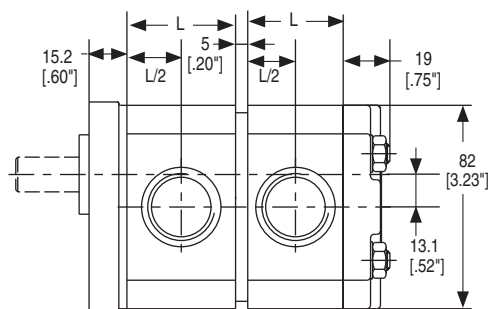

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov




PGP505 Performance Charts


PGP/PGM 500 Series

Single/Multiple Aluminum Pumps & Motors


3.0 CC

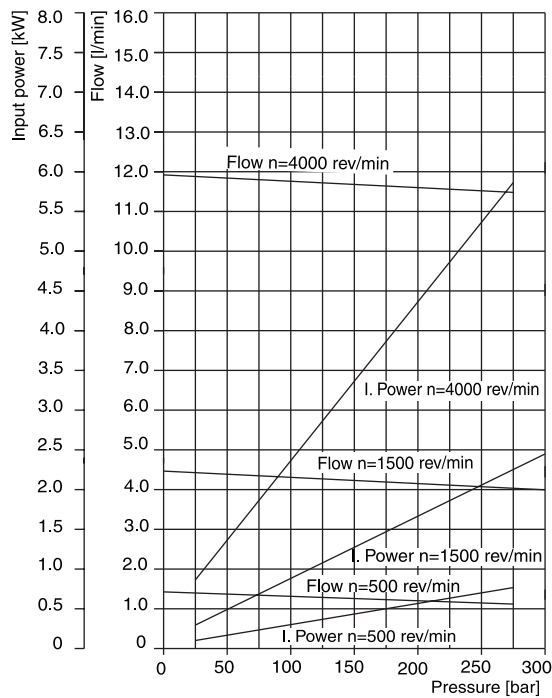


6.0 CC

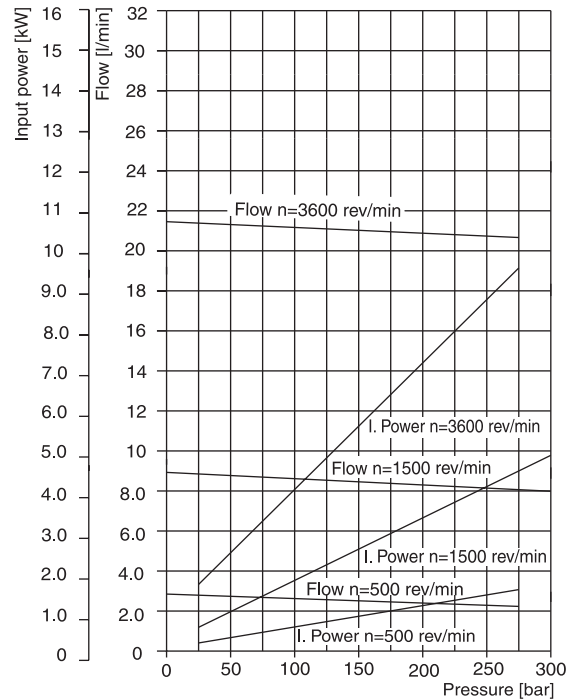

10.0 CC

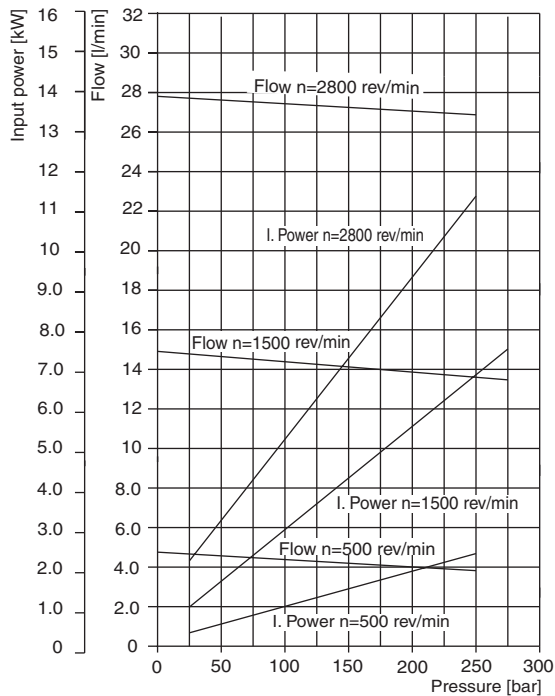

12.0 CC

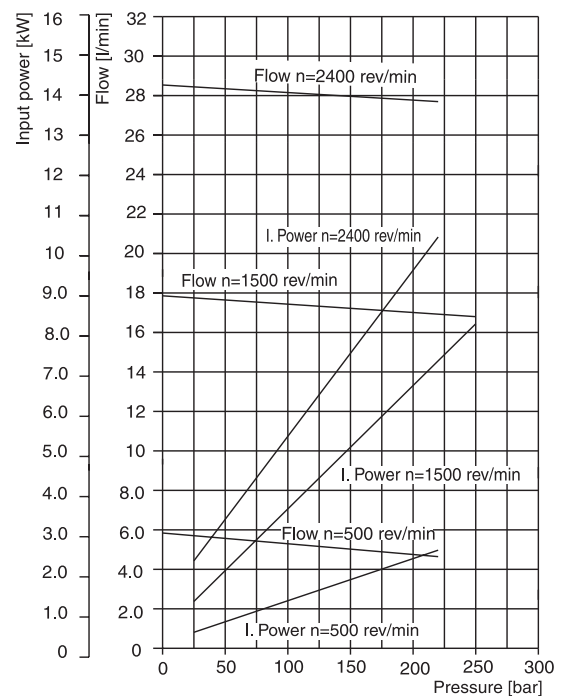


Fluid Temperature = $45 \pm 2^\circ\text{C}$
 Viscosity = $36 \text{ mm}^2/\text{s}$
 Inlet Pressure = $0.9 + 0.1 \text{ bar absolute}$




WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov



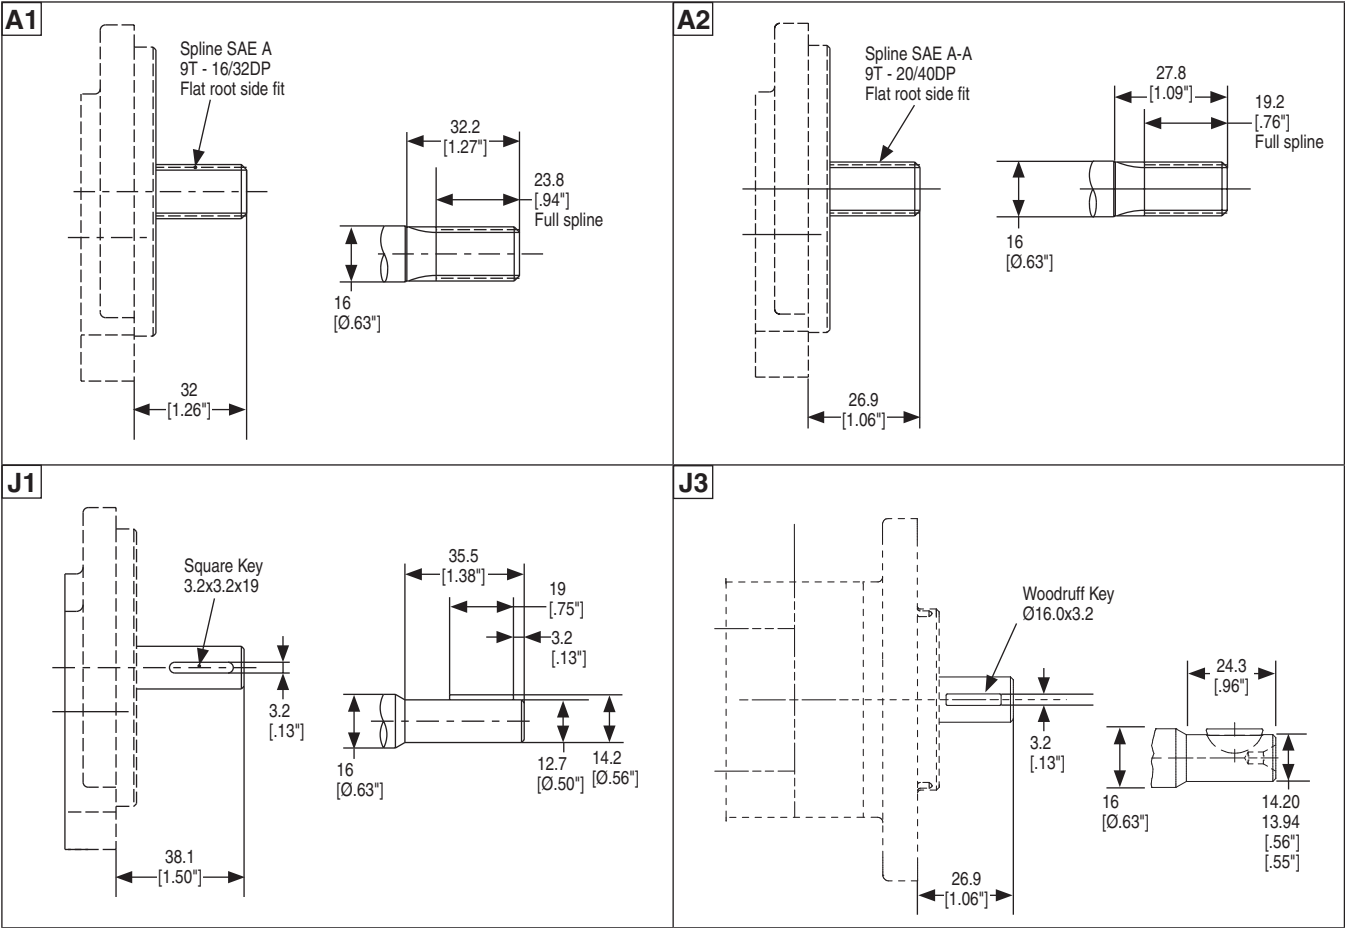

Continued on next page

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

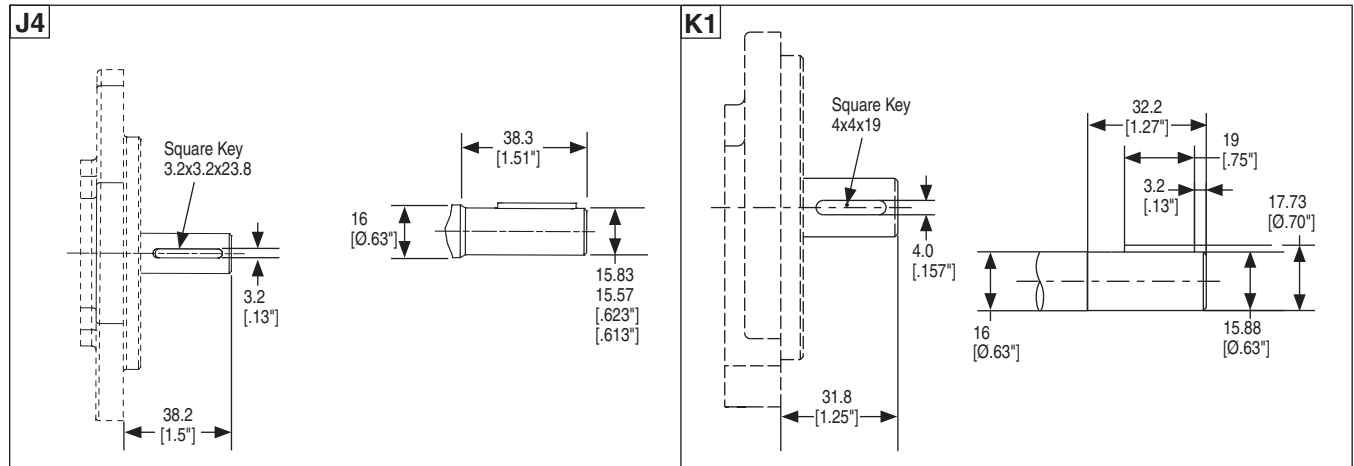PGP/PGM505 Drive Shafts (Continued)


$$\text{Torque [Nm]} = \frac{\text{Displacement [cm}^3\text{/rev]} \times \text{Pressure [bar]}}{57.2}$$

PGP/PGM505 Shaft Load Capacity

Code	Description		Torque Rating [Nm]
A1	9T, 16/32DP, 32L, SAE A	spline	108
A2	9T, 20/40DP, 26.9L, SAE AA	spline	108
J1	Ø 12.7, 3.2 Key, no thread, 38L	parallel	43
J3	Ø 12.7, 3.2 Key, no thread, 26.9L	parallel	43
J4	Ø 14.26, 3.2 Key, no thread, 38.1L	parallel	43
K1	Ø 15.88, 4.0 Key, no thread, 32L, SAE A	parallel	85
	Multiple pump connection shaft		36




WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

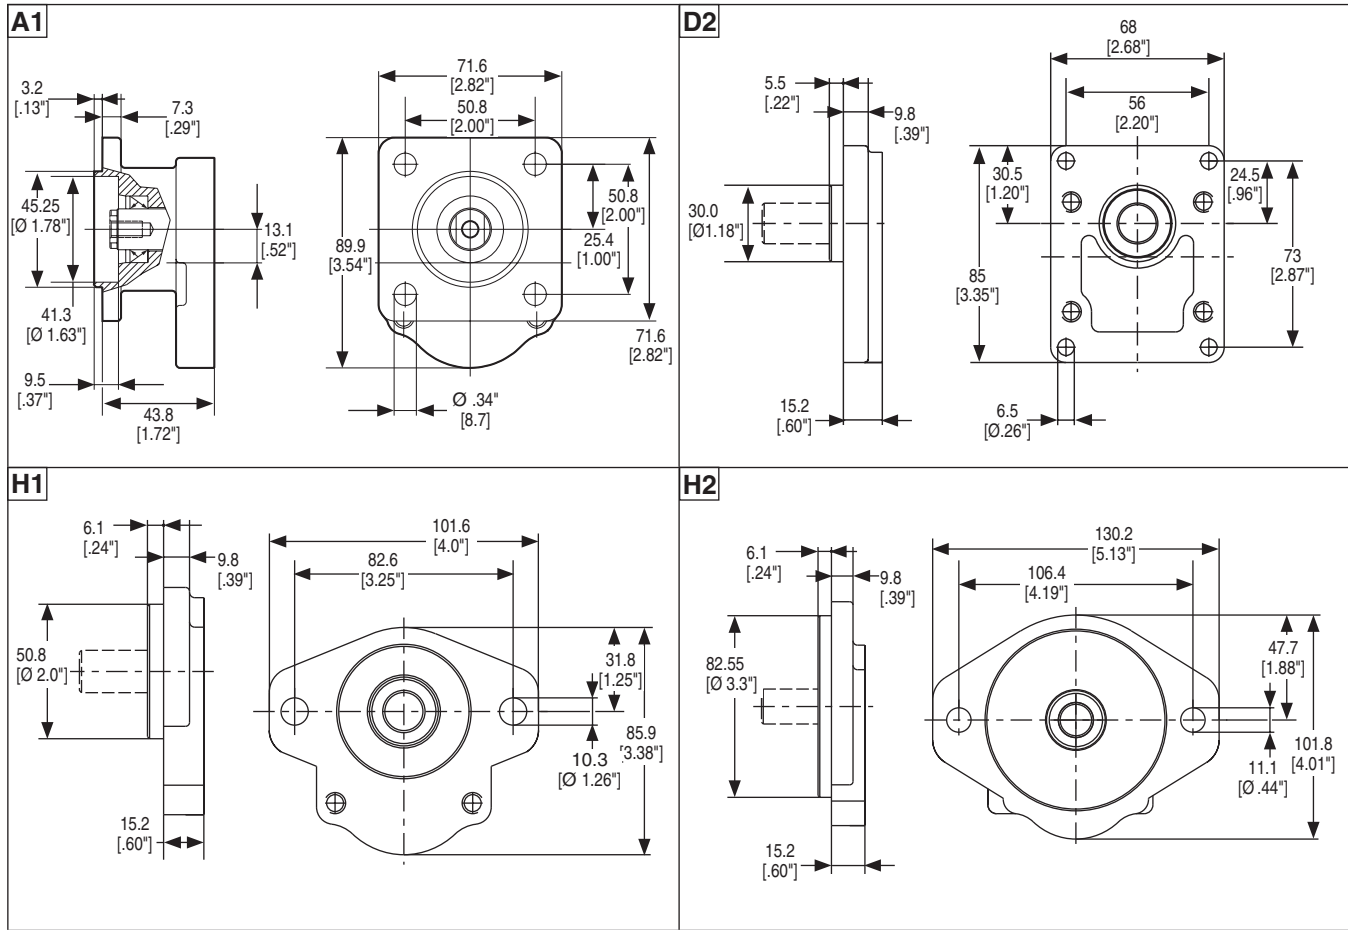PGP/PGM505 Mounting Flanges**PGP/PGM 500 Series****Single/Multiple Aluminum Pumps & Motors**

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov


PGP/PGM505 Port Options

D SAE Straight Thread



Code	SAE J1926-1 Dash Size	Nominal Tube OD	G1	T1
			Thread	Dimensions
D2	#6	3/8"	9/16" - 18 UNF	12.7 [0.50"]
D3	#8	1/2"	3/4" - 16 UNF	14.3 [0.56"]
D4	#10	5/8"	7/8" - 14 UNF	16.7 [0.66"]
D5	#12	3/4"	1-1/16" - 12 UN	19.0 [0.75"]

PGP/PGM505 Drain Positions

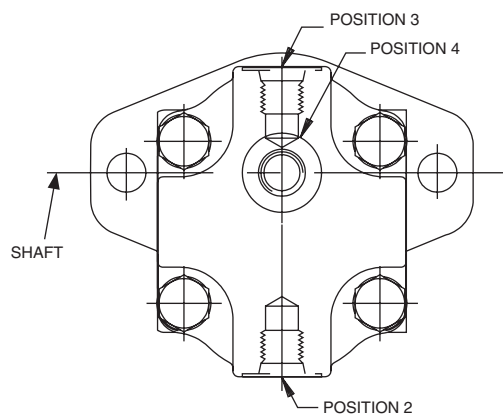

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

PGP/PGM505 Ordering Code

PGP/PGM 500 Series

Single/Multiple Aluminum Pumps & Motors

PG	1	505	2	3	4	5	6	7	8	8	8 ¹⁾	8 ¹⁾	9 ²⁾	10 ²⁾	12 ⁵⁾	505	2	3	7	8	8	11	3)	4)
----	---	-----	---	---	---	---	---	---	---	---	-----------------	-----------------	-----------------	------------------	------------------	-----	---	---	---	---	---	----	----	----

Code	1 – Type
P	Pump
M	Motor

Code	2 – Unit	
	Pump	Motor
A	Single unit	Standard motor without checks
B	Multiple unit	Standard motor with two checks
C	—	Standard Motor w/ one anti-cavitation check (ACC)
M	Single distributor unit	
Option C MUST NOT HAVE A DRAIN		

3 – Displacement	
Code	ccm
0020	2.0
0030	3.0
0040	4.0
0050	5.0
0060	6.0
0070	7.0
0080	8.0
0090	9.0
0100	10.0
0110	11.0
0120	12.0

Code	4 – Rotation
C	Clockwise
A	Counter-clockwise
B	Bi-directional

Code	5 – Shaft
A1	9T, 16/32DP, 32L, SAE A spline
A2	9T, 20/40DP, 26.9L, SAE AA spline
J1	Ø 12.7, 3.2 Key, no thread, 38L, parallel
J3	Ø 12.7, 3.2 Key, no thread, 26.9L, parallel
J4	Ø 14.26, 3.2 Key, no thread, 38.1L, parallel
K1	Ø 15.88, 4.0 Key, no thread, 32L, SAE A, parallel

Code	6 – Flange	Material
A1	50.8 x 50.8 - Ø 45.25 4-Bolt square	Cast Iron
D2	56.0 x 73.0 - Ø 30.0 rectangular	Cast Iron
H1	82.5 - Ø 50.8 SAE A-A 2-Bolt	Cast Iron
H2	106.4 - Ø 82.55 SAE A 2-Bolt	Cast Iron

Code	7 – Shaft Seal
X	No seal
N	NBR
M	Double NBR
W	Double FPM
V	FPM, FKM
Standard motor seals are rated for max 75 PSI. For special higher pressure shaft seal solutions please contact Parker.	

Code	8 – Port Options
B1	No ports
D2	9/16" - 18 UNF thread
D3	3/4" - 16 UNF thread
D4	7/8" - 14 UNF thread
D5	1-1/16" - 12 UN thread

Code	9 – Motor Drain Option
B1	No drain
A	7/16" - 20 UNF thread
C	9/16" - 18 UNF thread

Code	10 – Drain Port Position
2	Drain on bottom
3	Drain on top
4	Rear drain

Code	11 – Section Connection
S	Separate inlets
C	Common inlets
No code for single unit	

Code	12 – Corrosion Protection
Z	Zinc coated (5)
P1	Black paint 100 hour salt spray
P4	Black paint 400 hour salt spray
No code for no protection	

Not all variances of ordering codes can be offered. Please check available part numbers first. For not yet implemented part numbers or special requests please contact Parker Hannifin.

- 1) Only coded for the last section.
- 2) Only for motors.
- 3) For further unit repeat displacement, shaft seal between sections, side suction port, side pressure port, rear suction port, rear pressure port.
- 4) For adding built-in valves enter valve description at the end of the model code. Valve options described on [pages 38-48](#).
- 5) Mounting flange and rear cover are in cast iron; Zinc coating for covers and fasteners.



WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov



PGP	505	B	0100	C	A1	H2	V	D5	D3	C	505	A	0040	X	B1	D2	B1	B1
PGP	Gear Design / Type		Parker Gear Pump															
505	Series First Section																	
B	Unit		Tandem Unit															
0100	Displacement		10.0 cc/rev															
C	Rotation Direction		Clockwise															
A1	Drive Shaft		9T Spline SAE A, 32L															
H2	Mounting Flange Type		SAE A 2-Bolt															
V	Shaft Seal		Viton															
D5	Side Suction Port		1-1/16" - 12 UN Thread															
D3	Side Pressure Port		3/4" - 16 UNF Thread															
C	Section Connection		Common Inlets															
505	Series Second Section																	
A	Unit		Single Unit															
0040	Displacement		4.0 cc/rev															
X	Shaft Seal		No Shaft Seal															
B1	Side Suction Port		No Port															
D2	Side Pressure Port		9/16" - 18 UNF Thread															
B1	Rear Suction Port		No Port															
B1	Rear Pressure Port		No Port															



WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

■ **Up to 250 bar continuous operation**

High strength materials and large journal diameters provide low bearing loads for high pressure operation.

■ **High efficiency**

Pressure balanced bearing blocks assure maximum efficiency under all operating conditions.

■ **Application flexibility**

International mounts and connections, integrated valve capabilities and common inlet multiple pump configurations provide unmatched design and application versatility.

■ **Low noise**

12 tooth gear profile and optimized flow metering provide reduced pressure pulsation and quiet operation.

■ **Large range of integrated valves**






Product Features	Description
Pump Type	Pressure balanced, aluminum, external gear
Mounting	SAE, rectangular, thru-bolt standard, specials on request
Ports	SAE and metric split flanges and others
Shaft Style	SAE splined, keyed, cylindrical tang drive, specials on request
Maximum Speed	500 - 3500 rpm, see Specifications
Theor. displacement	See Specifications
Drive	Drive direct with flexible coupling is recommended.
Axial / Radial load	Consult with product service for allowable loading.
Inlet pressure	Operating range 0.8 to 2 bar abs. Min. inlet pressure 0.5 bar abs. Short time without load. Maximum suggested inlet flow velocity for pumps: 2.5 mps. Consultation is recommended.
Outlet pressure	See Specifications
Pressure rising rate	Max. 3000 bar/s
Hydraulic fluids	Hydraulic oil HLP, ISO, DIN 51524-2
Fluid viscosity	Range of operating viscosity 8 to 1000 mm ² /s. Max. permissible operating pressure dependent on viscosity. Viscosity range for cold start 1000 to 2000 mm ² /s at operating pressure $p \leq 10$ bar and speed $n \leq 1500$ rpm.

Product Features	Description
Fluid temperature	For NBR seals, range of operating temperature -40° to +80°C. For FKM seals, range of operating temperature -20° to +105°C. Max. permissible operating pressure dependent on fluid temperature. Temperature for cold start -20° to -15°C at speed ≤ 1500 rpm. Max. permissible operating pressure dependent on fluid temperature.
Filtration	According to ISO 4406 Cl. 19/17/13
Direction of rotation (looking at the drive shaft)	Clockwise, counter-clockwise or double. Attention! Drive pump only in indicated direction of rotation.
Multiple pump assemblies	- Available in two or three sections; limitations shown in the shaft loading rating table in this catalog. - Max. load is determined by adding the torque values for each pumping section that will be simultaneously loaded.
Separate or common inlet capability	Separate inlet configuration: - Each gear housing has individual inlet and outlet ports. Common inlet configuration: - Two gear sets share a common inlet.

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov





PGP/PGM511 Specifications

Code		0040	0050	0060	0070	0080	0100	0110	0120	0140	0160	0180	0190	0210	0230	0250	0270	0280	0310	0330
Displacements	cm ³ /rev	4	5	6	7	8	10	11	12	14	16	18	19	21	23	25	27	28	31	33
	in ³ /rev	0.24	0.31	0.37	0.43	0.49	0.61	0.67	0.73	0.85	0.98	1.10	1.16	1.28	1.40	1.53	1.65	1.71	1.89	2.01
Continuous Pressure	bar	250	250	250	250	250	250	250	250	250	250	250	250	235	225	210	190	185	165	155
	psi	3625	3625	3625	3625	3625	3625	3625	3625	3625	3625	3625	3625	3410	3265	3045	2755	2685	2395	2248
Intermittent Pressure	bar	275	275	275	275	275	275	275	275	275	275	275	275	240	235	220	200	190	170	160
	psi	3988	3988	3988	3988	3988	3988	3988	3988	3988	3988	3988	3988	3480	3408	3190	2900	2755	2465	2320
Min. Speed @ Max. Outlet Pressure	rpm	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500
Max. Speed @ 0 Inlet & Max. Outlet Pressure	rpm	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3250	3250	2800	2750	2500	2350	2350	2350	2000
Pump Input Power @ Max. Pressure and 1500 rpm	HP	4.02	5.03	6.03	7.04	8.05	10.06	11.13	12.07	14.08	16.09	18.10	19.18	19.31	19.71	19.98	20.12	21.19	22.40	23.20
	kW	3.0	3.8	4.5	5.3	6.0	7.5	8.3	9.0	10.5	12.0	13.5	14.3	14.4	14.7	14.9	15.0	15.8	16.7	17.3
Dimension L	mm	47.0	48.6	50.1	51.7	53.3	56.5	58.0	59.6	62.8	65.9	69.0	70.6	73.7	76.9	80.0	83.2	84.8	89.5	92.6
	in	1.85"	1.91"	1.97"	2.04"	2.10"	2.22"	2.28"	2.35"	2.47"	2.59"	2.72"	2.78"	2.90"	3.03"	3.15"	3.28"	3.34"	3.52"	3.65"
Approximate Weight	lbs	7.1	7.3	7.5	7.7	7.7	7.8	7.9	8.2	8.2	8.4	8.6	8.6	8.8	9.0	9.3	9.3	9.5	9.7	9.9
	kg	3.2	3.3	3.4	3.5	3.5	3.6	3.6	3.7	3.7	3.8	3.9	3.9	4.0	4.1	4.2	4.2	4.3	4.4	4.5

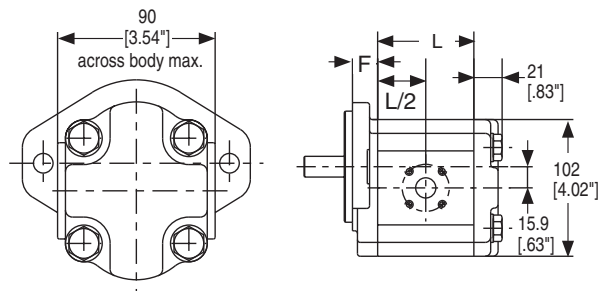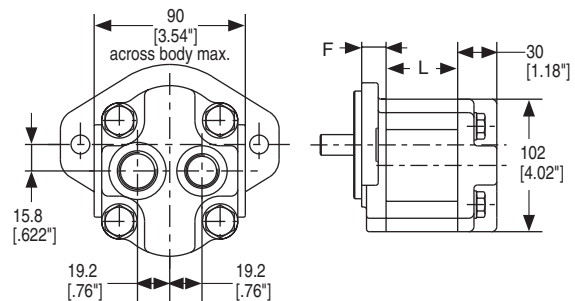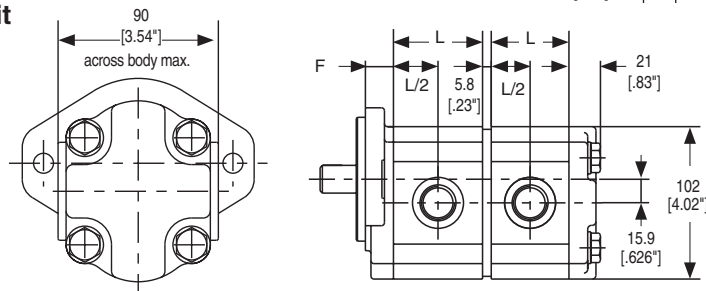PGP/PGM511 Dimensions**Single Unit****Single Unit with Rear Ports****Tandem Unit**

Dimension F:
See Flanges on [page 24](#)



WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

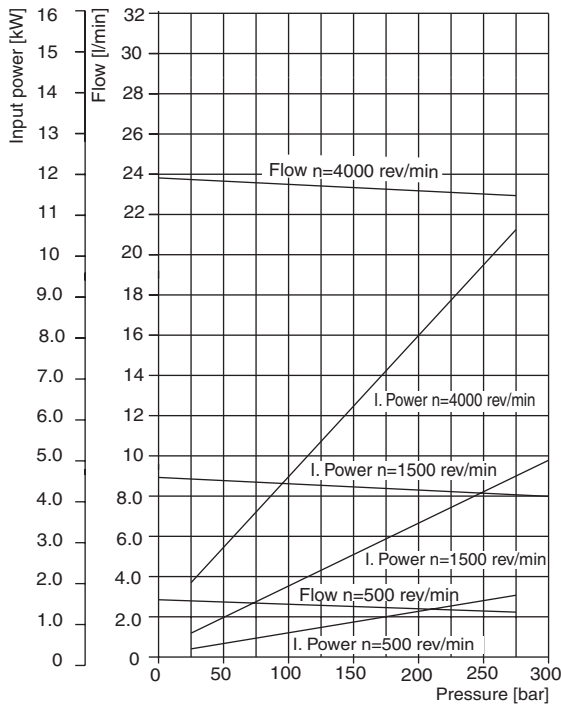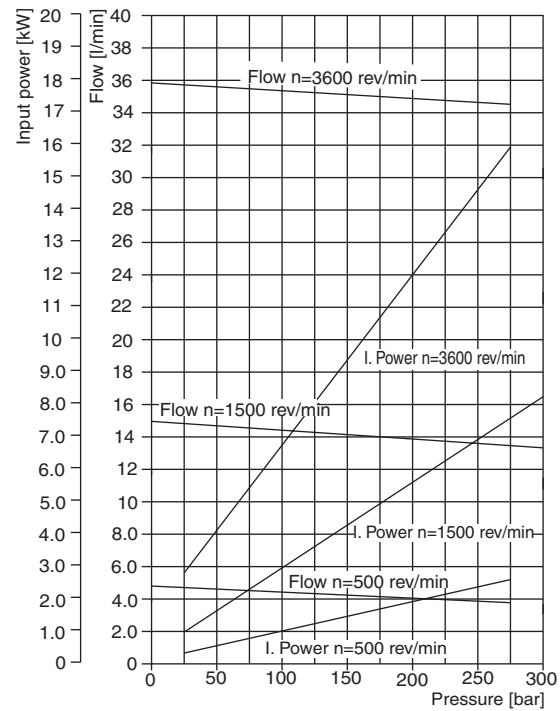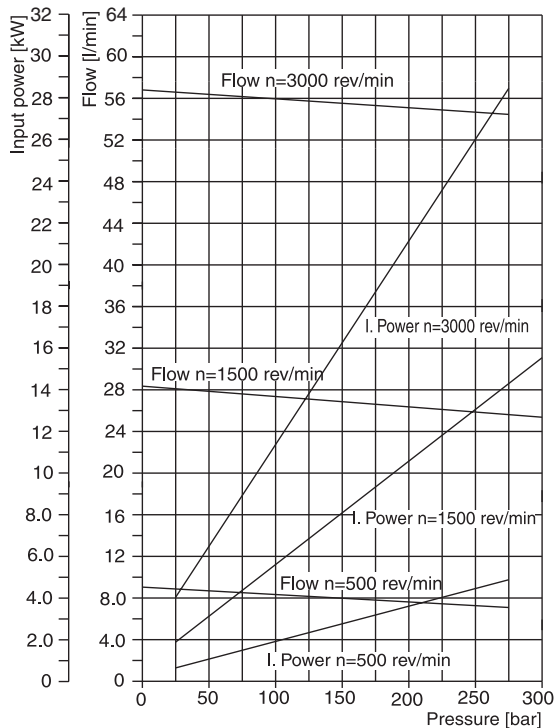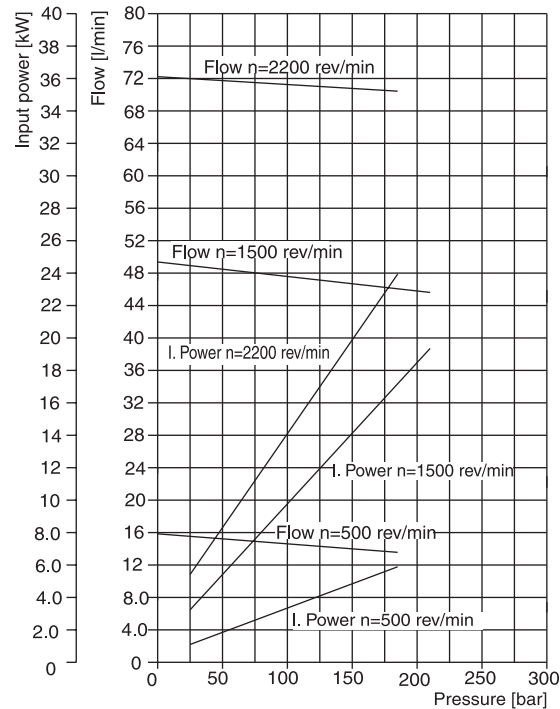PGP511 Performance Charts**PGP/PGM 500 Series****Single/Multiple Aluminum Pumps & Motors****6.0 CC****10.0 CC****19.0 CC****33.0 CC**


Fluid Temperature = $45 \pm 2^\circ\text{C}$
 Viscosity = $36 \text{ mm}^2/\text{s}$
 Inlet Pressure = $0.9 \pm 0.1 \text{ bar absolute}$

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

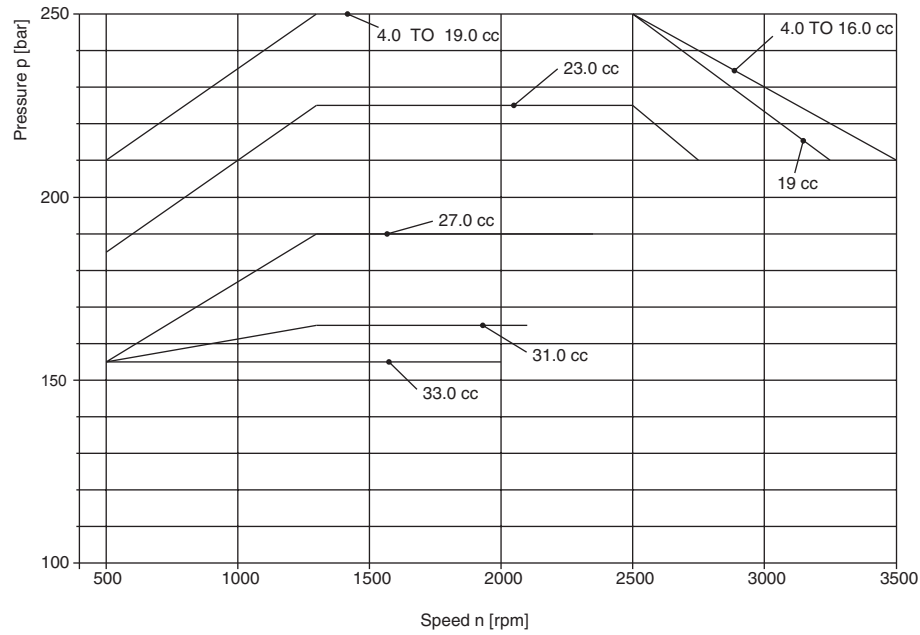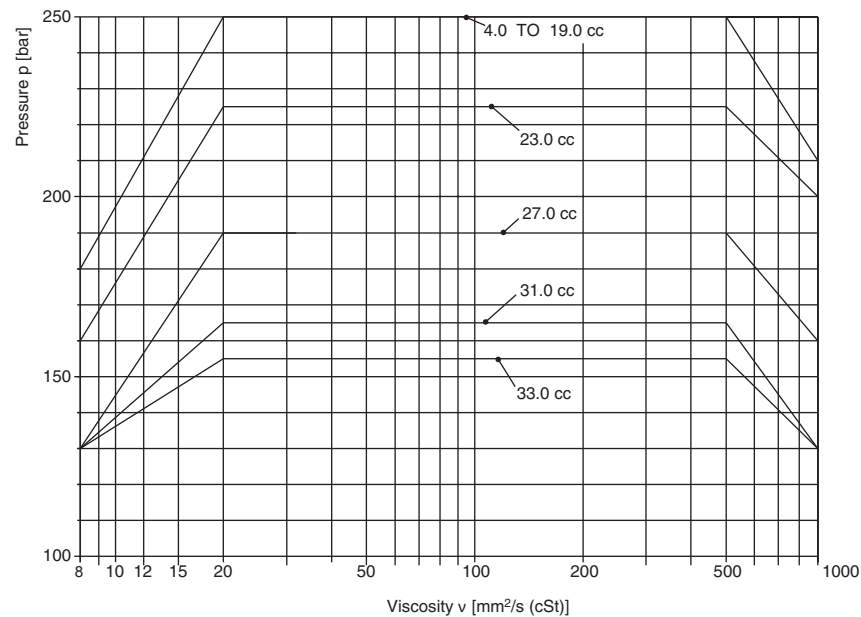


Pressure depending on speed**Pressure depending on viscosity**

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

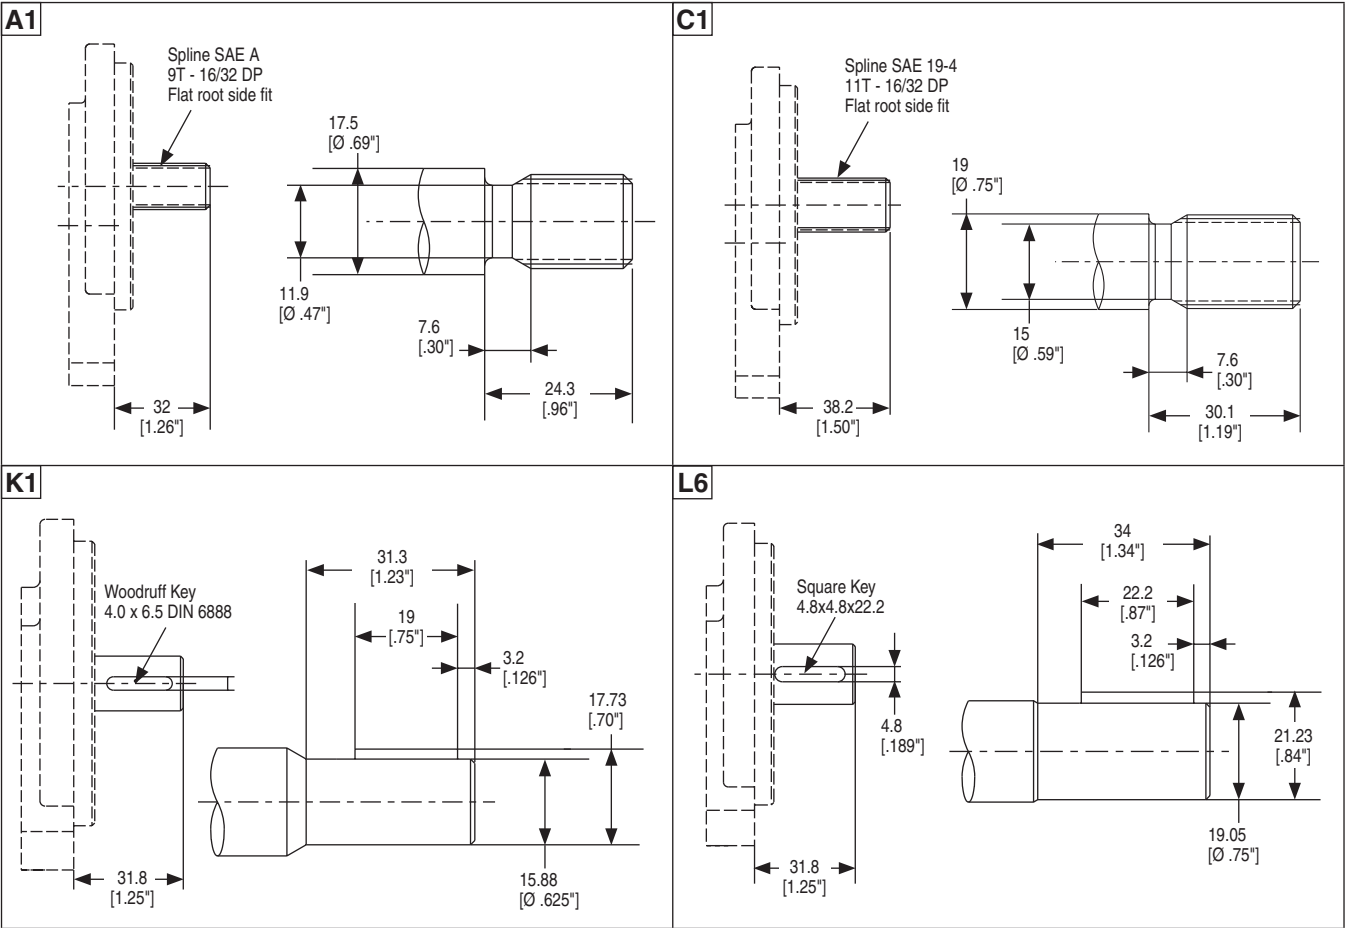

Continued on next page

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

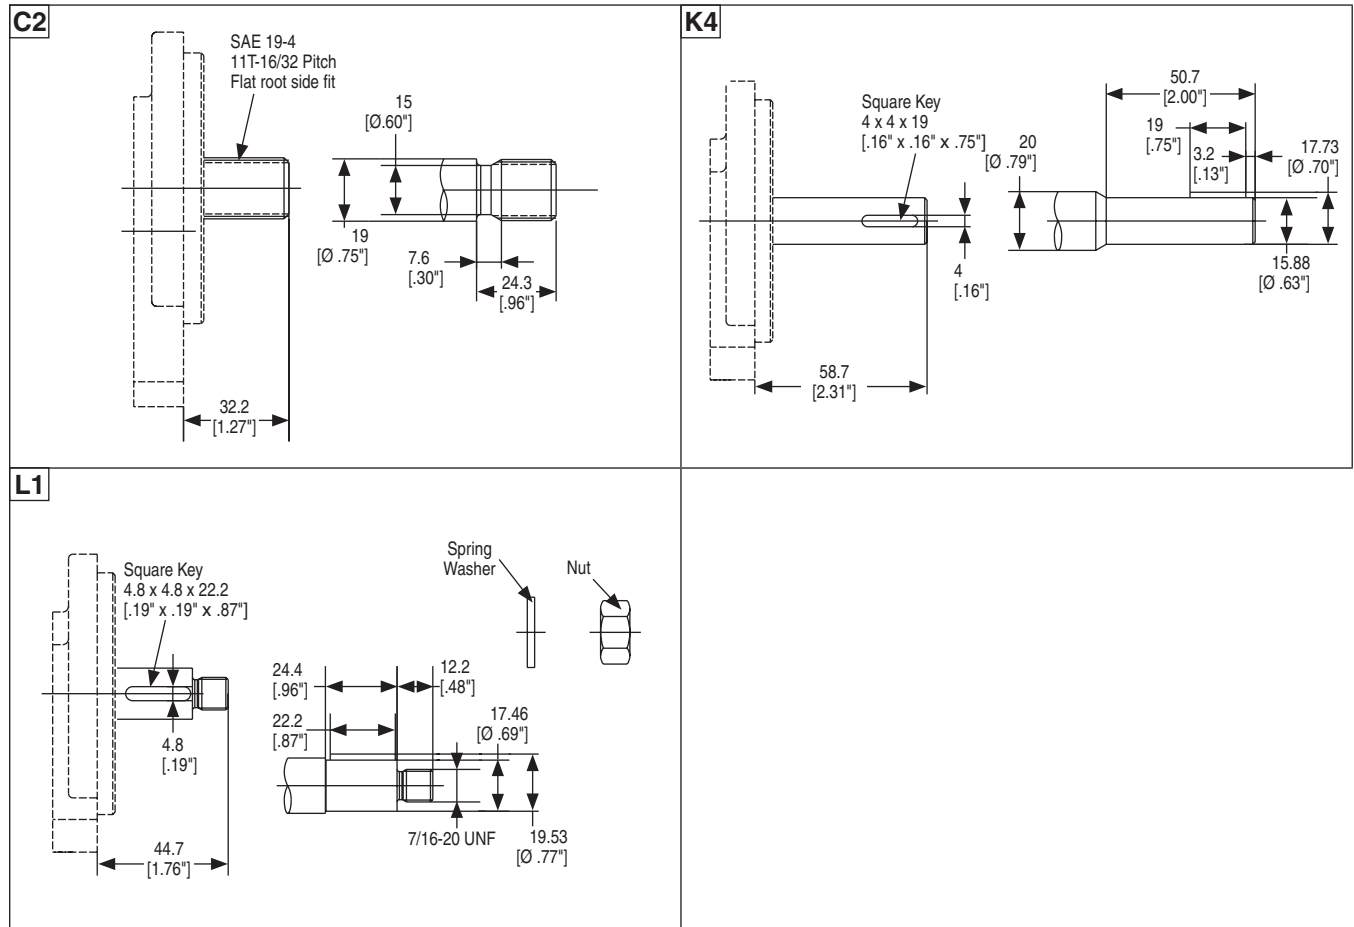
PGP/PGM511 Drive Shafts (Continued)**PGP/PGM511 Shaft Load Capacity**

Code	Description		Torque Rating [Nm]
A1	9T, 16/32DP, 32L, SAE A	spline	86
C1	11T, 16/32DP, 38.2L, SAE 19-4	spline	184
C2	11T, 16/32DP, 32.2L, SAE 19-4	spline	184
K1	Ø 15.88, 4.0 Key, no thread, 32L, SAE A	parallel	75
K4	Ø 15.88, 3.95 Key, no thread, 58.7L	parallel	75
L1	Ø 17.46, 4.8 Key, 7/16" UNF ext., 44.2L	parallel	112
L6	Ø 19.05, 4.8 Key, no thread, 32L, SAE 19-1	parallel	145
	Tandem pump connection shaft	spline	110

$$\text{Torque [Nm]} = \frac{\text{Displacement [cm}^3\text{/rev]} \times \text{Pressure [bar]}}{57.2}$$




WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

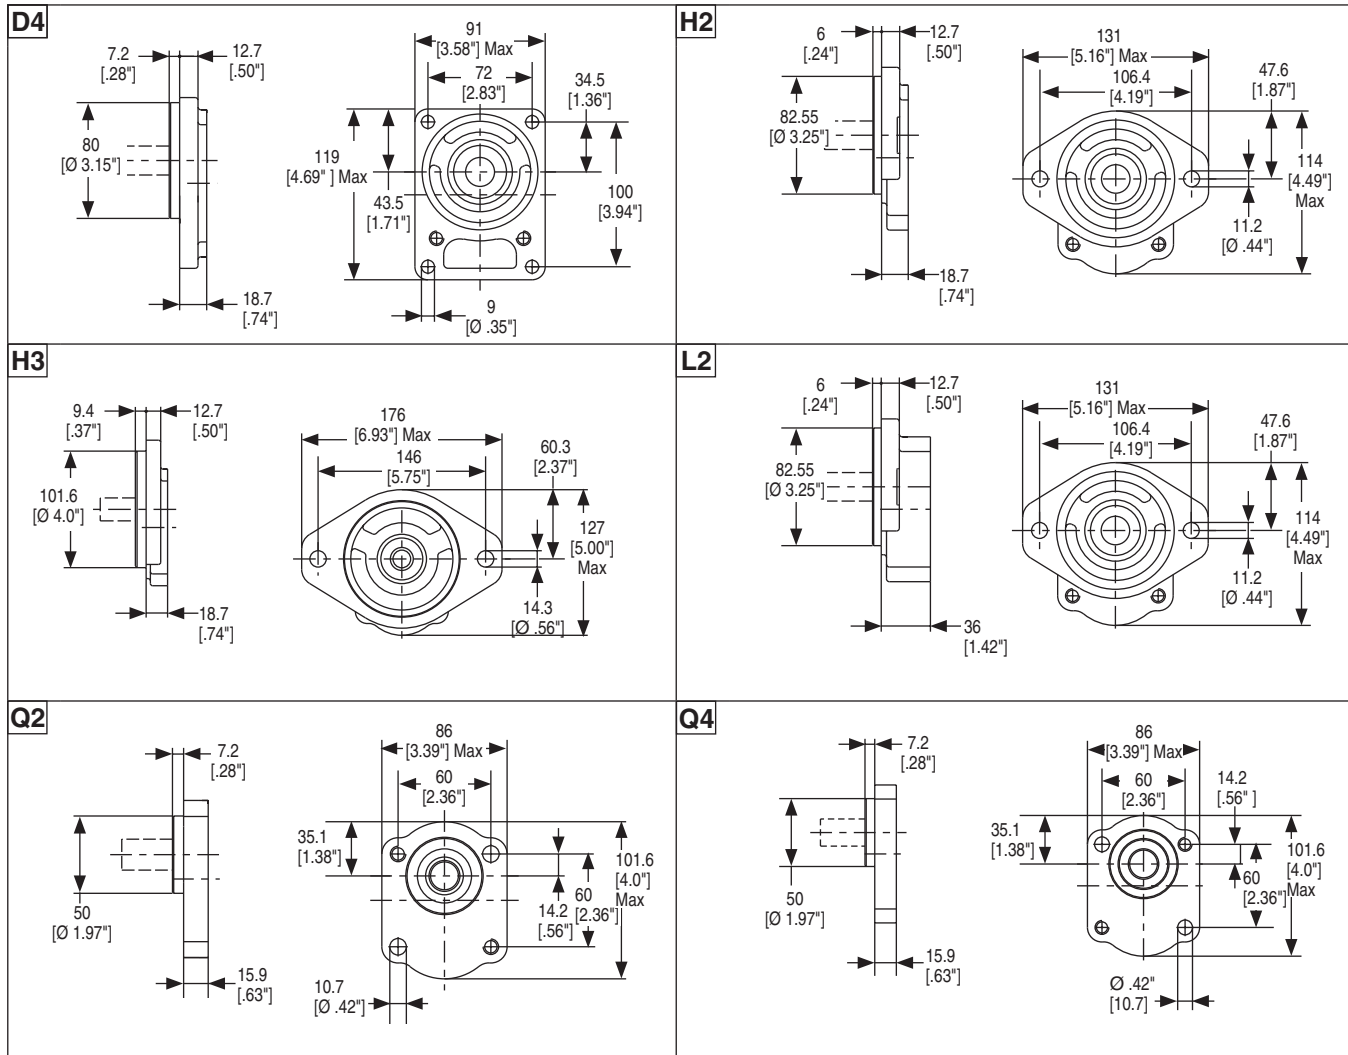PGP/PGM511 Mounting Flanges**PGP/PGM 500 Series****Single/Multiple Aluminum Pumps & Motors**

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov


PGP/PGM511 Port Options

D SAE Straight Thread

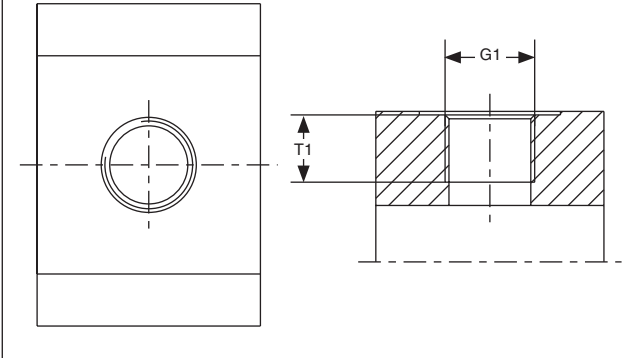

Code	SAE J1926-1 Dash Size	Nominal Tube OD	G1	T1
			Thread	Dimensions
D2	#6	3/8"	9/16" - 18 UNF	0.50" [12.7]
D3	#8	1/2"	3/4" - 16 UNF	0.56" [14.3]
D4	#10	5/8"	7/8" - 14 UNF	0.66" [16.7]
D5	#12	3/4"	1-1/16" - 12 UN	0.75" [19.0]
D6	#16	1"	1-5/16" - 12 UN	0.75" [19.0]
D7	#20	1-1/4"	1-5/8" - 12 UN	0.75" [19.0]
D8	#24	1-1/2"	1-7/8" - 12 UN	0.75" [19.0]



PGP/PGM511 Drain Positions

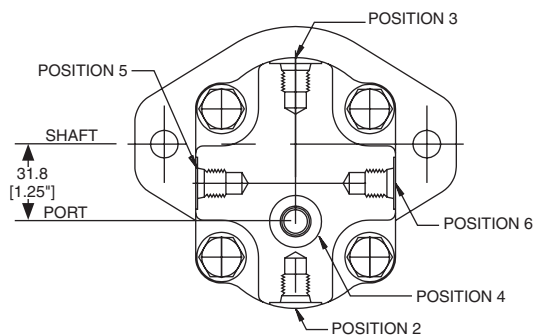

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

Bearing loads for code L2

Units subject to axial or radial loads, for instance drive with V-belts or gear wheels, must be specified with an outboard bearing. The diagrams below show the maximum axial or radial loads that can be tolerated referred to a bearing life of $L_H = 1000$ h. F_r is reduced by $0,7 F_a$ when axial loading is applied.

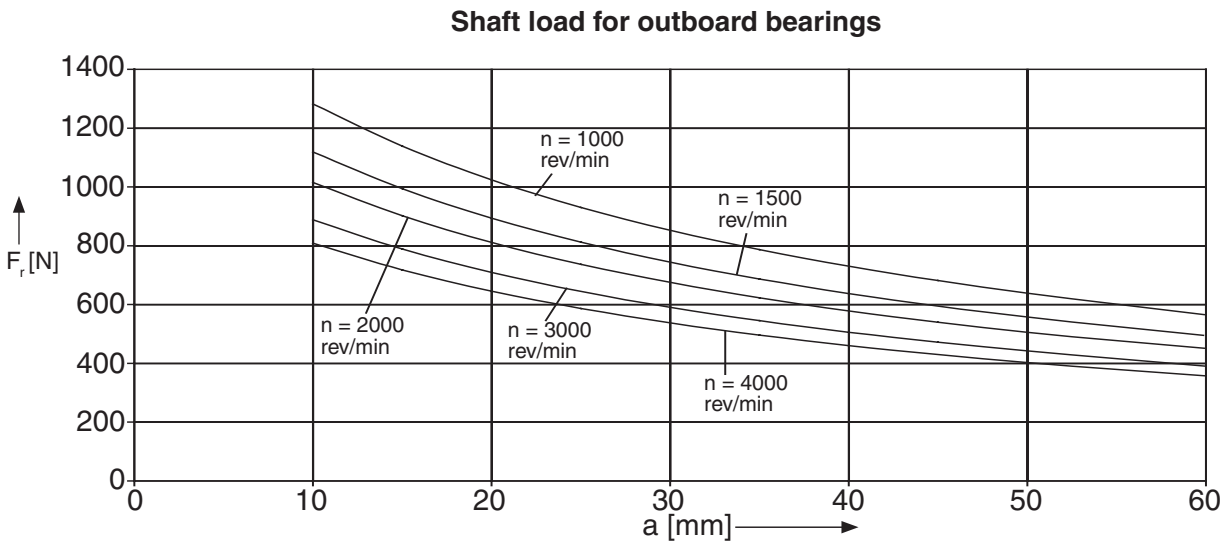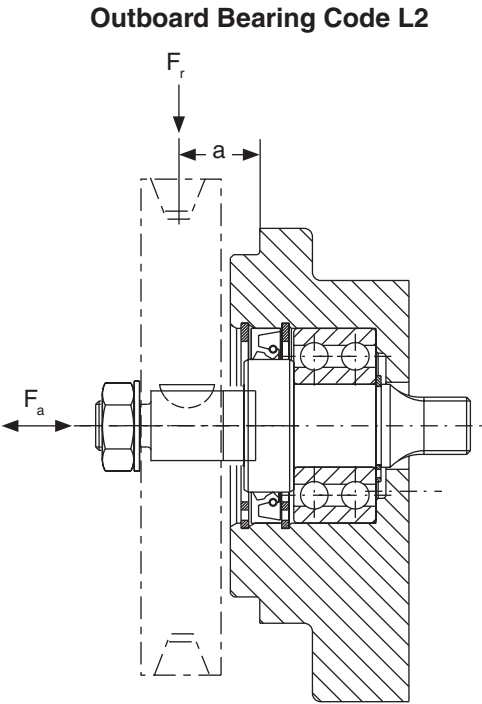

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

PG	1	511	2	3	4	5	6	7	8	8	8 ¹⁾	8 ¹⁾	9 ²⁾	10 ³⁾	12 ⁵⁾	511	2	3	7	8	8	11	3)	4)
----	---	-----	---	---	---	---	---	---	---	---	-----------------	-----------------	-----------------	------------------	------------------	-----	---	---	---	---	---	----	----	----

Code	1 – Type
P	Pump
M	Motor

Code	2 – Unit	
	Pump	Motor
A	Single unit	Standard Motor without checks
B	Multiple unit	Standard Motor with two checks
C	—	Standard Motor w/ one anti-cavitation check (ACC)
D	—	Standard Motor w/ one ACC + restrictor
M	Single distributor unit	—

Option C MUST NOT HAVE A DRAIN

Option D MUST HAVE A DRAIN

3 – Displacement*	
Code	ccm
0040	4.0
0050	5.0
0060	6.0
0070	7.0
0080	8.0
0100	10.0
0110	11.0
0120	12.0
0140	14.0
0160	16.0
0180	18.0
0190	19.0
0210	21.0
0230	23.0
0250	25.0
0270	27.0
0280	28.0
0310	31.0
0330	33.0

* Others on request

Code	4 – Rotation
C	Clockwise
A	Counter-clockwise
B	Bi-directional

Code	5 – Shaft
A1	9T, 16/32DP, 32L, SAE A spline
C1	11T, 16/32DP, 38.2L, SAE 19-4 spline
C2	11T, 16/32DP, 32.2L, SAE 19-4 spline
K1	Ø15.88, 4.0 Key, no thread, 32L, SAE A, parallel
K4	Ø15.88, 4.0 Key, no thread, 58.7L, parallel
L1	Ø17.46, 4.8 Key, 7/16" UNF ext., 44.7L, parallel
L6	Ø19.05, 4.8 Key, no thread, 32L, SAE 19-1, parallel

Code	6 – Flange	Material
D4	72.0 x 100.0 - Ø80 rectangular	Aluminum
H2	106.4 - Ø82.55 SAE A 2-Bolt	Aluminum
H3	146.1 - Ø101.6 SAE B 2-Bolt	Aluminum
Q2	60.0 x 60.0 - Ø50.0 w/ seal, O thru bolt	Aluminum
Q4	60.0 x 60.0 - Ø50.0 w/ seal, O thru bolt	Aluminum
L2	106.4 - Ø82.55 SAE A 2-Bolt, w/ OBB and cont. drive shaft	Cast Iron

Code	7 – Shaft Seal
X	No seal
N	NBR
V	FPM, FKM
M	Double NBR
W	Double FPM

Standard motor seals are rated for max 75 PSI. For special higher pressure shaft seal solutions please contact Parker.

Code	8 – Port Options
B1	No ports
D2	9/16" - 18 UNF thread
D3	3/4" - 16 UNF thread
D4	7/8" - 14 UNF thread
D5	1-1/16" - 12 UN thread
D6	1-5/16" - 12 UN thread
D7	1-5/8" - 12 UN thread
D8	1-7/8" - 12 UN thread

Code	9 – Motor Drain Option
B1	No drain
A	7/16" - 20 UNF thread
C	9/16" - 18 UNF thread

Code	10 – Drain Position
2	Drain on bottom
3	Drain on top
4	Rear drain
5	Drain right view on drive shaft
6	Drain left view on drive shaft

Code	11 – Section Connection
S	Separate inlets
C	Common inlets
No code for single unit	

Code	12 – Corrosion Protection
Z	Zinc coated (5)
P1	Black paint 100 hour salt spray
P4	Black paint 400 hour salt spray
No code for no protection	

Not all variances of ordering codes can be offered. Please check available part numbers first.

For not yet implemented part numbers or special requests please contact Parker Hannifin.

1) Only coded for the last section.

2) Only for motors.

3) For further unit repeat displacement, shaft seal between sections, side suction port, side pressure port, rear suction port, rear pressure port.

4) For adding built-in valves enter valve description at the end of the model code. Valve options described on [pages 38-48](#).

5) Rear cover is in cast iron; Zinc coating for rear cover and fasteners, and for mounting flange code L2.

**WARNING:** This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

PGP/PGM511 Ordering Example**PGP/PGM 500 Series****Single/Multiple Aluminum Pumps & Motors**

PGP	511	B	0100	A	C1	H2	N	D6	D5	S	511	A	0110	X	D6	D5	B1	B1	P
PGP	Gear Design / Type		Parker Gear Pump																
511	Series																		
B	Unit		Tandem Unit																
0100	Displacement		10.0 cm ³ /rev.																
A	Rotation Direction		Counter-Clockwise																
C1	Drive shaft		SAE 19-4 Spline 11T, 16/32 DP																
H2	Flange		Mounting Flange SAE 2-Bolt A																
N	Shaft Seal		Shaft Seal NBR																
D6	Side Suction Port		1-5/16" - 12 UN Thread																
D5	Side Pressure Port		1-1/16" - 12 UN Thread																
S	Section Connection		Separate Inlets																
511	Series Second Section																		
A	Unit		Single Unit																
110	Displacement		11.0 cm ³ /rev.																
X	Shaft Seal		No Seal																
D6	Side Suction Port		1-5/16" - 12 UN Thread																
D5	Side Pressure Port		1-1/16" - 12 UN Thread																
B1	Rear Suction Port		No Port																
B1	Rear Pressure Port		No Port																
P1	Corrosion Protection		Black Paint 100 Hour Salt Spray																



WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov



■ **Up to 250 bar continuous operation**

High strength materials and large journal diameters provide low bearing loads for high pressure operation.

■ **High efficiency**

Pressure balanced bearing blocks assure maximum efficiency under all operating conditions.

■ **Low noise**

13 tooth gear profile and optimized flow metering provide reduced pressure pulsation and exceptionally quiet operation.

■ **Application flexibility**

International mounts and connections, integrated valve capabilities and common inlet multiple pump configurations provide unmatched design and application versatility.

■ **Large range of integrated valves**



Product Features	Description
Pump Type	Pressure balanced, aluminum, external gear
Mounting	SAE, rectangular, thru-bolt standard specials on request
Ports	SAE and metric split flanges and others
Shaft Style	SAE splined, keyed, tapered, cylindrical tang drive, specials on request
Maximum Speed	500 - 3400 rpm, see Specifications
Theor. displacement	See Specifications
Drive	Drive direct with flexible coupling is recommended.
Axial / Radial load	Consult with product service for allowable loading.
Inlet pressure	Operating range 0.8 to 2 bar abs. Min. inlet pressure 0.5 bar abs. Short time without load. Maximum suggested inlet flow velocity for pumps: 2.5 mps. Consultation is recommended.
Outlet pressure	See Specifications
Pressure rising rate	Max. 3000 bar/s
Hydraulic fluids	Hydraulic oil HLP, ISO, DIN 51524-2
Fluid viscosity	Range of operating viscosity 8 to 1000 mm ² /s. Max. permissible operating pressure dependent on viscosity. Viscosity range for cold start 1000 to 2000 mm ² /s at operating pressure $p \leq 10$ bar and speed $n \leq 1500$ rpm.

Product Features	Description
Fluid temperature	For NBR seals, range of operating temperature -40° to +80°C. For FKM seals, range of operating temperature -20° to +105°C. Max. permissible operating pressure dependent on fluid temperature. Temperature for cold start -20° to -15°C at speed ≤ 1500 rpm. Max. permissible operating pressure dependent on fluid temperature.
Filtration	According to ISO 4406 Cl. 19/17/13
Direction of rotation (looking at the drive shaft)	Clockwise, counter-clockwise. Attention! Drive pump only in indicated direction of rotation.
Multiple pump assemblies	- Available in two or three sections, limitations shown in the shaft loading rating table in this catalog. - Max. load is determined by adding the torque values for each pumping section that will be simultaneously loaded.
Separate or common inlet capability	Separate inlet configuration: - Each gear housing has individual inlet and outlet ports. Common inlet configuration: - Two gear sets share a common inlet.




WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

PGP/PGM517 Specifications


Code		0140	0160	0190	0230	0250	0280	0330	0360	0380	0440	0520	0580	0700
Displacements	cm ³ /rev	14.0	16.0	19.0	23.0	25.0	28.0	33.0	36.0	38.0	44.0	52.0	58.0	70.0
	in ³ /rev	0.85	0.98	1.16	1.40	1.53	1.71	2.01	2.20	2.32	2.69	3.17	3.54	3.05
Continuous Pressure	bar	250	250	250	250	250	250	250	250	250	220	200	180	160
	psi	3625	3625	3625	3625	3625	3625	3625	3625	3625	3190	2900	2610	2320
Intermittent Pressure	bar	275	275	275	275	275	275	275	275	275	240	220	200	180
	psi	3988	3988	3988	3988	3988	3988	3988	3988	3988	3480	3190	2900	2610
Min. Speed @ Max. Outlet Pressure	rpm	500	500	500	500	500	500	500	500	500	500	500	500	500
Max. Speed @ 0 Inlet & Max. Outlet Pressure	rpm	3400	3400	3300	3300	3100	3100	3000	3000	3000	2800	2700	2600	2400
Pump Input Power @ Max. Pressure and 1500 rpm	HP	12.87	14.75	17.57	21.19	23.03	25.88	30.44	33.16	35.00	36.21	38.35	40.23	41.84
	kW	9.6	11.0	13.1	15.8	17.2	19.3	22.7	24.7	26.1	27.0	28.6	30.0	31.2
Dimension L	mm	68.3	70.3	73.3	77.4	79.4	82.4	87.5	90.5	92.5	98.6	106.7	112.8	124.9
	in	2.69"	2.77"	2.89"	3.05"	3.13"	3.24"	3.44"	3.56"	3.64"	3.88"	4.20"	4.44"	4.92"
Approximate Weight	lbs	17.4	17.6	17.9	18.3	18.5	18.7	19.2	19.4	19.6	20.2	20.9	21.5	22.6
	kg	7.9	8.0	8.1	8.3	8.4	8.5	8.7	8.8	8.9	9.2	9.5	9.8	10.2

PGP/PGM517 Dimensions


Single Unit



Single Unit with Rear Ports

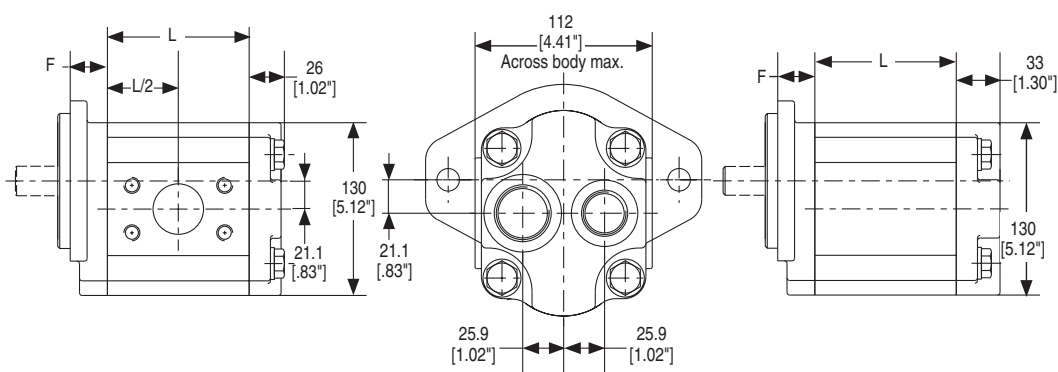

Tandem Unit

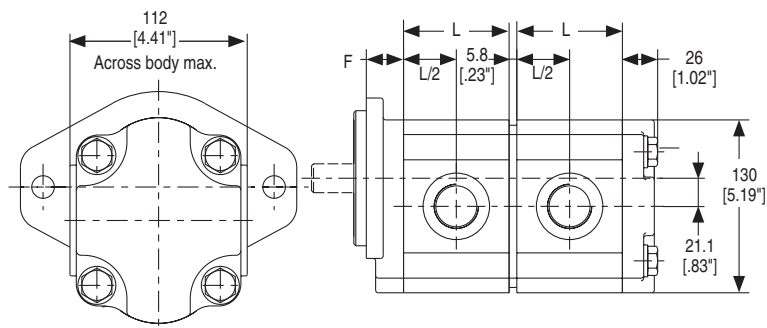

Dimension F:
See Flanges on [page 34](#)


WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

PGP517 Performance Charts


PGP/PGM 500 Series

Single/Multiple Aluminum Pumps & Motors


16.0 CC

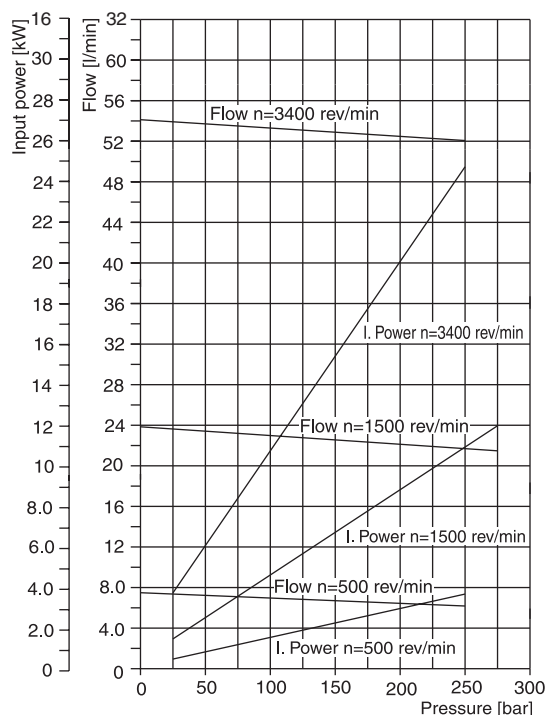


28.0 CC

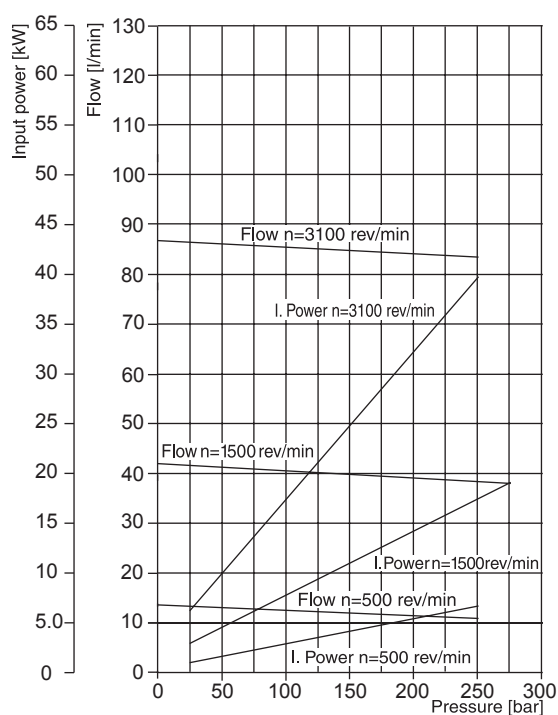

44.0 CC

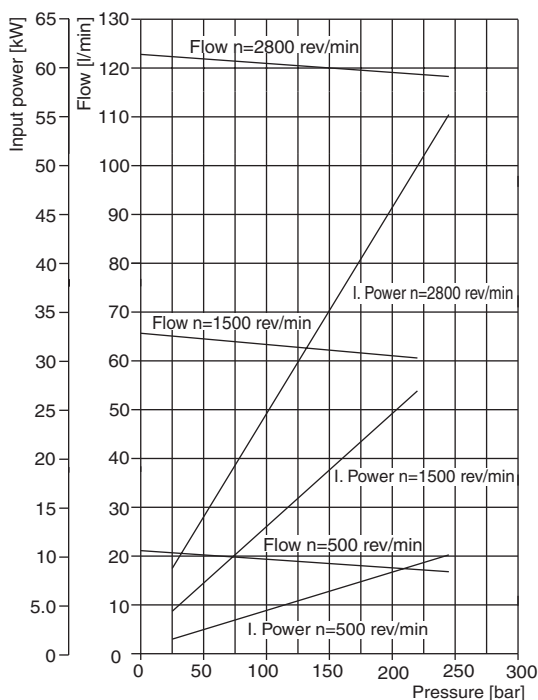

52.0 CC

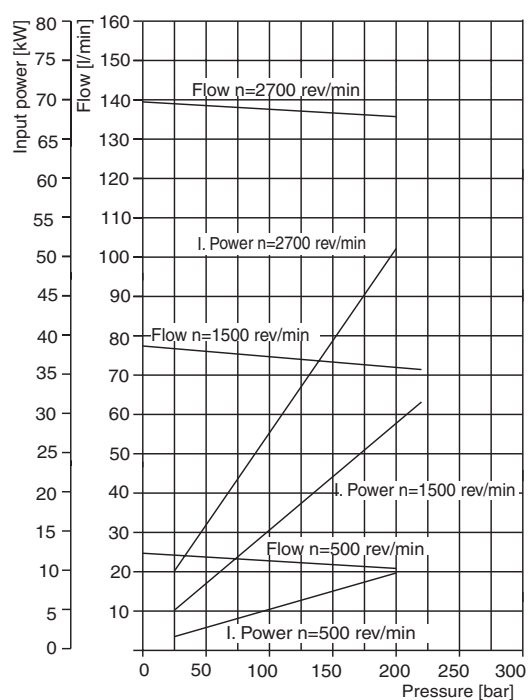


Fluid Temperature = $45 \pm 2^\circ\text{C}$
 Viscosity = $36 \text{ mm}^2/\text{s}$
 Inlet Pressure = $0.9 + 0.1 \text{ bar absolute}$




WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

Pressure depending on speed

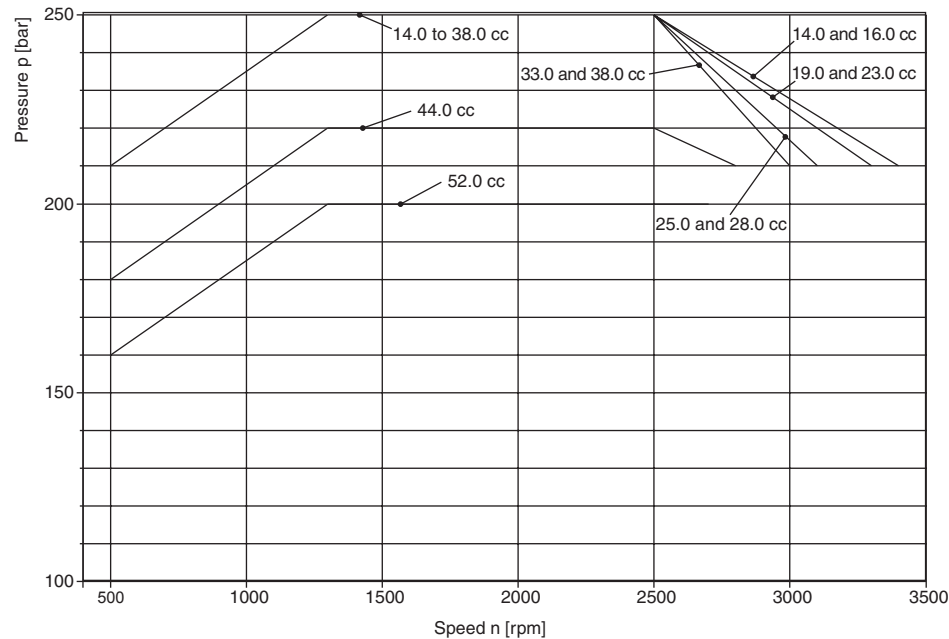


Pressure depending on viscosity

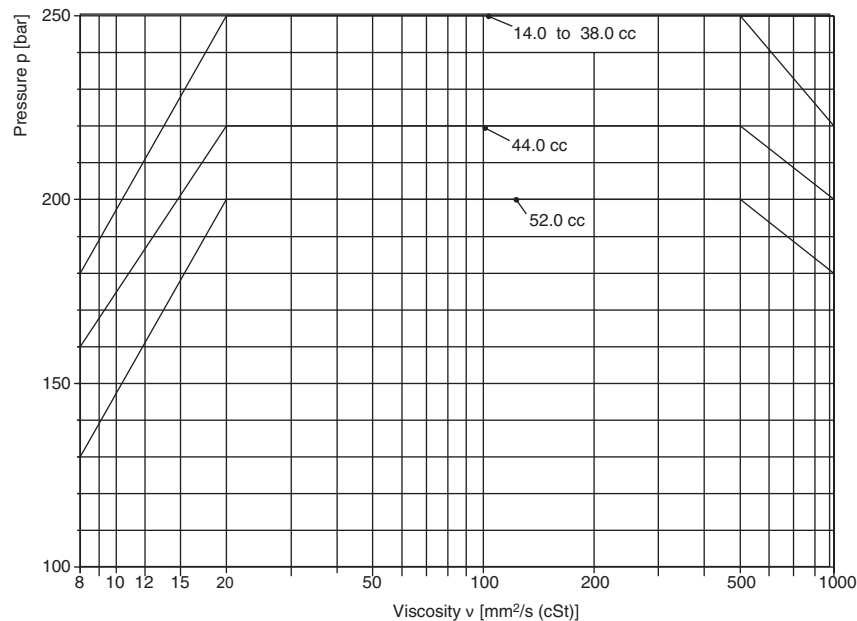

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

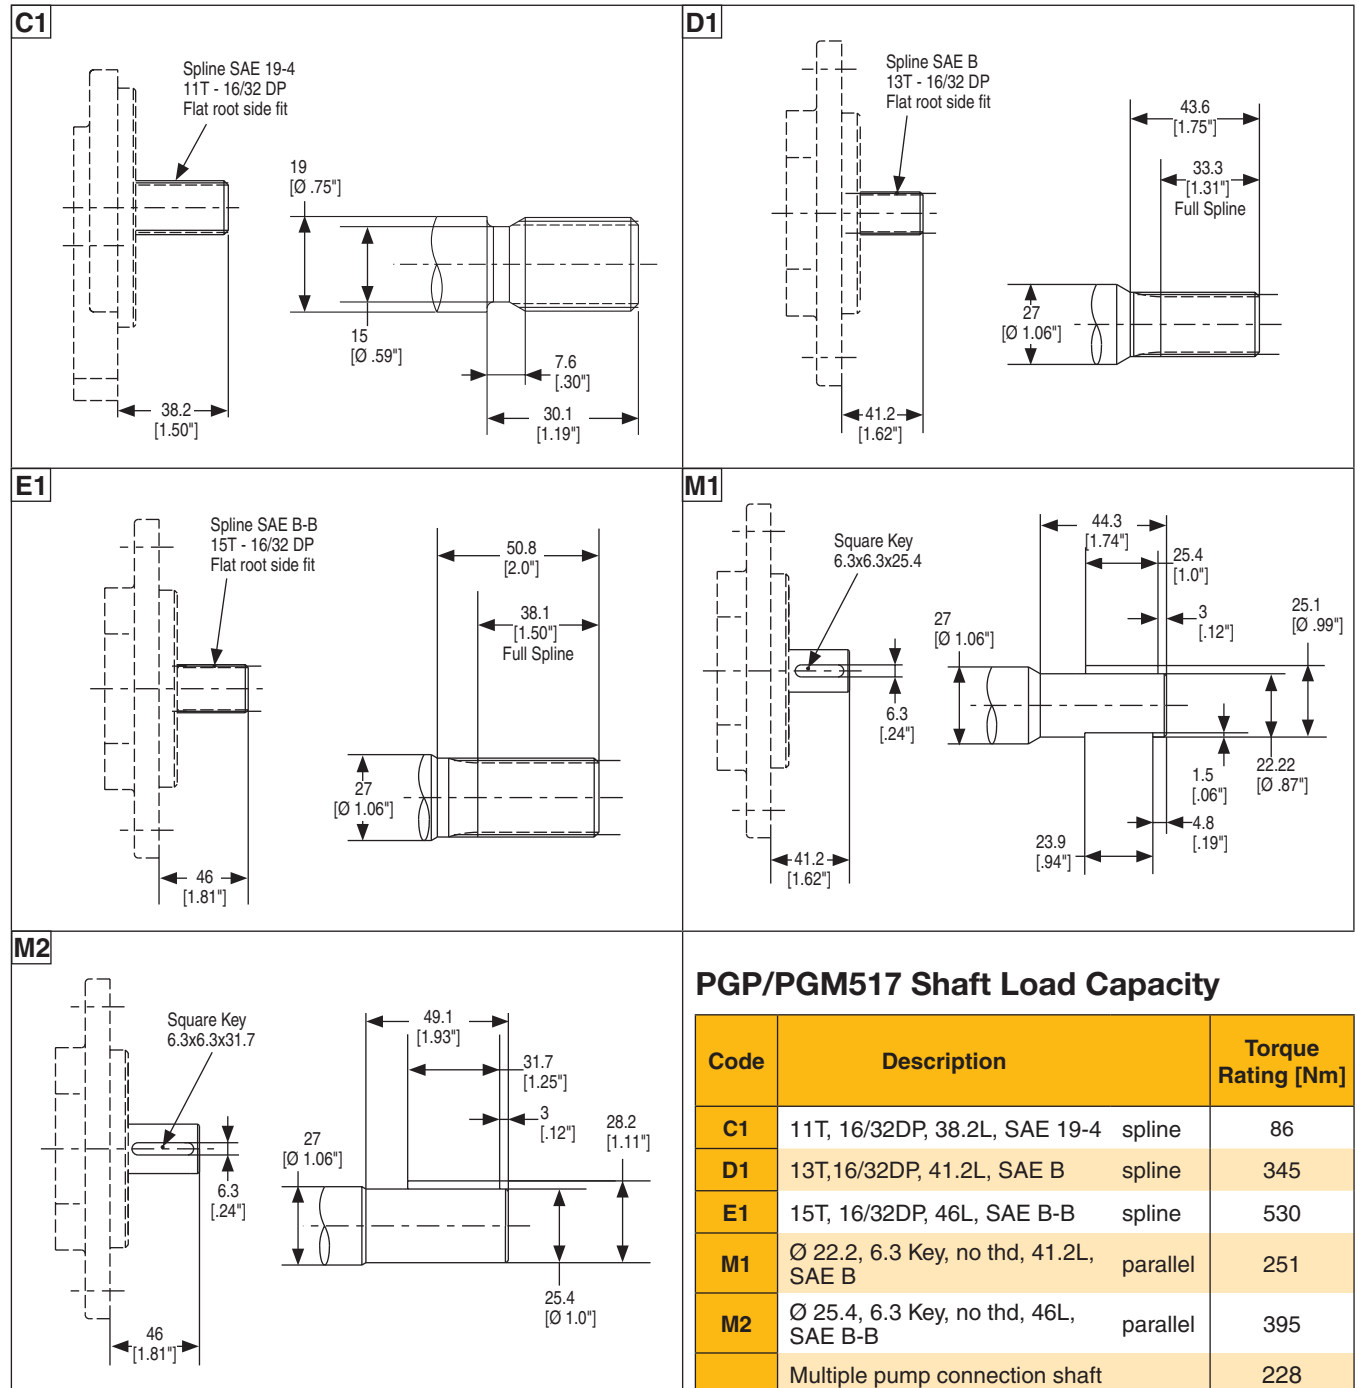

PGP/PGM517 Drive Shafts**PGP/PGM517 Shaft Load Capacity**

Code	Description	Torque Rating [Nm]
C1	11T, 16/32DP, 38.2L, SAE 19-4 spline	86
D1	13T, 16/32DP, 41.2L, SAE B spline	345
E1	15T, 16/32DP, 46L, SAE B-B spline	530
M1	Ø 22.2, 6.3 Key, no thd, 41.2L, SAE B parallel	251
M2	Ø 25.4, 6.3 Key, no thd, 46L, SAE B-B parallel	395
	Multiple pump connection shaft	228


$$\text{Torque [Nm]} = \frac{\text{Displacement [cm}^3\text{/rev]} \times \text{Pressure [bar]}}{57.2}$$



WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

PGP/PGM517 Mounting Flanges

PGP/PGM 500 Series
Single/Multiple Aluminum Pumps & Motors

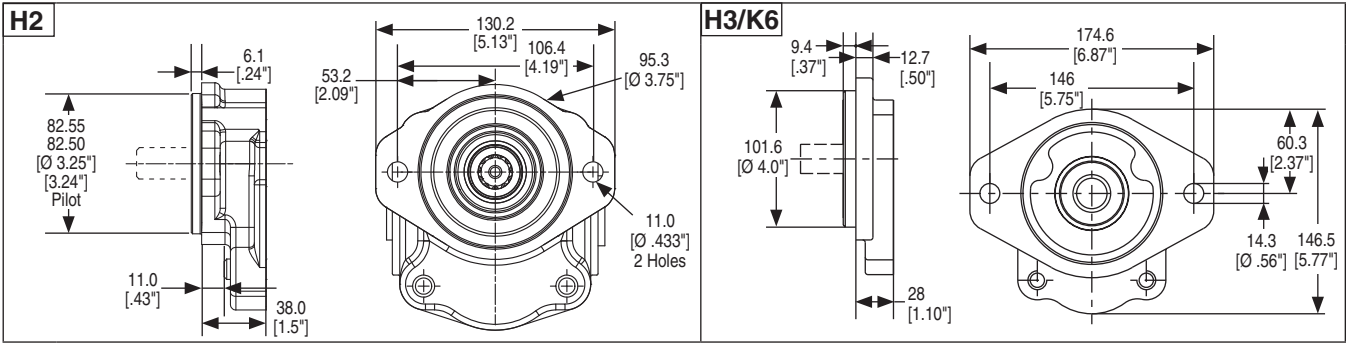


H2 = Cast Iron
H3 = Cast Iron
K6 = Aluminum

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov




PGP/PGM517 Port Options

D SAE Straight Thread

Code	SAE J1926-1 Dash Size	Nominal Tube OD	G1	T1
			Thread	Dimensions
D2	#6	3/8"	9/16" - 18 UNF	12.7 [0.50"]
D3	#8	1/2"	3/4" - 16 UNF	14.3 [0.56"]
D4	#10	5/8"	7/8" - 14 UNF	16.7 [0.66"]
D5	#12	3/4"	1-1/16" - 12 UN	19.0 [0.75"]
D6	#16	1"	1-5/16" - 12 UN	19.0 [0.75"]
D7	#20	1-1/4"	1-5/8" - 12 UN	19.0 [0.75"]
D8	#24	1-1/2"	1-7/8" - 12 UN	19.0 [0.75"]

PGP/PGM517 Drain Positions

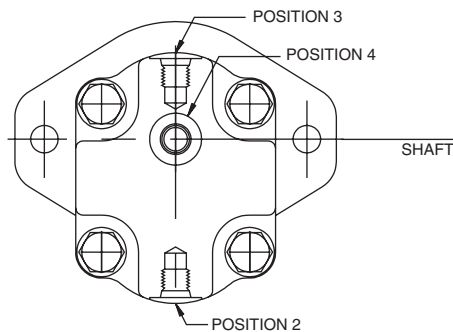

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

PGP/PGM517 Ordering Code

PGP/PGM 500 Series

Single/Multiple Aluminum Pumps & Motors

PG	1	517	2	3	4	5	6	7	8	8	8 ¹⁾	8 ¹⁾	9 ²⁾	10 ²⁾	12 ⁵⁾	517	2	3	7	8	8	11	3)	4)
----	---	-----	---	---	---	---	---	---	---	---	-----------------	-----------------	-----------------	------------------	------------------	-----	---	---	---	---	---	----	----	----

Code	1 – Type
P	Pump
M	Motor

Code	2 – Unit	
	Pump	Motor
A	Single unit	Standard Motor without checks
B	Multiple unit	Standard Motor with two checks
C	—	Standard Motor w/ one anti-cavitation check (ACC)
D	—	Standard Motor w/ one ACC + restrictor
M	Single distributor unit	—
Option C MUST NOT HAVE A DRAIN		
Option D MUST HAVE A DRAIN		

3 – Displacement*	
Code	ccm
0140	14
0160	16
0190	19
0230	23
0250	25
0280	28
0330	33
0360	36
0380	38
0440	44
0520	52
0580	58
0700	70
* Others on request	

Code	4 – Rotation
C	Clockwise
A	Counter-clockwise
B	Bi-directional

Code	5 – Shaft
C1	11T, 16/32DP, 38.2L, SAE 19-4 spline
D1	13T, 16/32DP, 41.2L, SAE B spline
E1	15T, 16/32DP, 46L, SAE B-B spline
M1	Ø 22.2, 6.3 Key, no thread, 41.2L, SAE B, parallel
M2	Ø 25.4, 6.3 Key, no thread, 46L, SAE B-B, parallel

Code	6 – Flange	Material
H2	106.4 - Ø 82.55 SAE A 2-Bolt	Cast Iron
H3	146.1 - Ø 101.6 SAE B 2-Bolt	Cast Iron
K6	146.1 - Ø 101.6 SAE B 2-Bolt	Aluminum

Code	7 – Shaft Seal
X	No seal
N	NBR
V	FPM, FKM
M	Double NBR
W	Double FPM
Standard motor seals are rated for max 75 PSI. For special higher pressure shaft seal solutions please contact Parker.	

Code	8 – Port Options
B1	No ports
D3	3/4" - 16 UNF thread
D4	7/8" - 14 UNF thread
D5	1-1/16" - 12 UN thread
D6	1-5/16" - 12 UN thread
D7	1-5/8" - 12 UN thread
D8	1-7/8" - 12 UN thread

Code	9 – Motor Drain Option
B1	No drain
A	7/16" - 20 UNF thread
C	9/16" - 18 UNF thread

Code	10 – Drain Port Position
2	Drain on bottom
3	Drain on top
4	Rear drain

Code	11 – Section Connection
S	Separate inlets
C	Common inlets
No code for single unit	

Code	12 – Corrosion Protection
Z	Zinc coated (5)
P	Black primer paint
No code for no protection	

Not all variances of ordering codes can be offered. Please check available part numbers first. For not yet implemented part numbers or special requests please contact Parker Hannifin.

- 1) Only coded for the last section.
- 2) Only for motors.
- 3) For further unit repeat displacement, shaft seal between sections, side suction port, side pressure port, rear suction port, rear pressure port.
- 4) For adding built-in valves enter valve description at the end of the model code. Valve options described at [pages 38-48](#).
- 5) Rear cover is in cast iron; Zinc coating for rear cover, fasteners, and for mounting flange code H2 and H3.

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov



PGP	517	A	0230	A	D1	H3	N	D6	D5	B1	B1	Z
PGP	Gear Design / Type		Parker Gear Pump									
517	Series											
A	Unit		Single Unit									
0230	Displacement		23.0 cm ³ /rev.									
A	Rotation Direction		Counter-Clockwise									
D1	Shaft		SAE B Spline 13T, 16/32 DP									
H3	Flange		Mounting Flange SAE 2-Bolt B									
N	Shaft Seal		Shaft Seal NBR									
D6	Side Suction Port		1-5/16" - 12 UN Thread									
D5	Side Pressure Port		1-1/16" - 12 UN Thread									
B1	Rear Suction Port		No Port									
B1	Rear Pressure Port		No Port									
Z	Corrosion Protection		Zinc Coated									



WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov


Valve Type	PGP502	PGP505	PGP511	PGP517
Pressure-Relief Valve - Adjustable - External Vent	x	x	x	x
Pressure-Relief Valve - Non Adjustable - External Vent	x	x	x	x
Two Stage Pump	x	x	x	x
Priority Flow Divider Valve			x	x
Load Sensing Priority Valve			x	x

Valve Type	PGM502	PGM505	PGM511	PGM517
Single Pressure-Relief Valve	x	x	x	x
Single Pressure-Relief Valve with Anti-cav	x	x	x	x
Cross Port Pressure-Relief Valves		x	x	
Cross Port Pressure-Relief Valves with Anti-cav		x	x	
Cross Port Pressure-Relief Valves with Anti-cav plus Check Valves		x	x	
Solenoid Proportional Pressure-Relief Valve		x	x	x
Speed Sensor	x	x	x	x


 **WARNING:** This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

Pressure-Relief Valves – PGP502, PGP505, PGP511 and PGP517

Non adjustable, external tank port

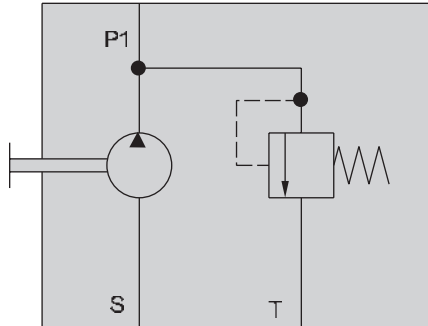


Adjustable, external tank port

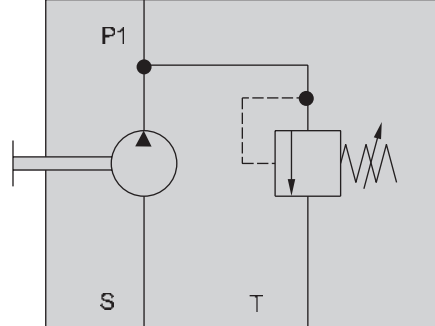


Two - Stage Pump – PGP505, PGP511 and PGP517

With External Tank Port (recommended)

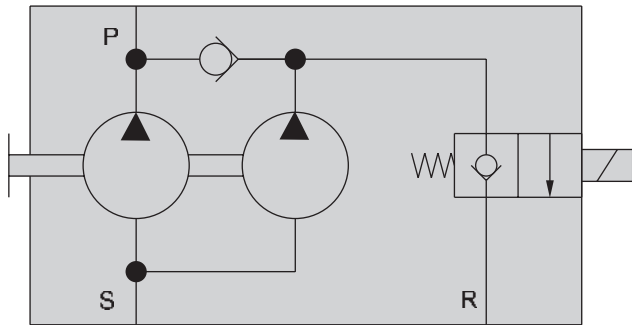

With Internal Vent to Pump Inlet

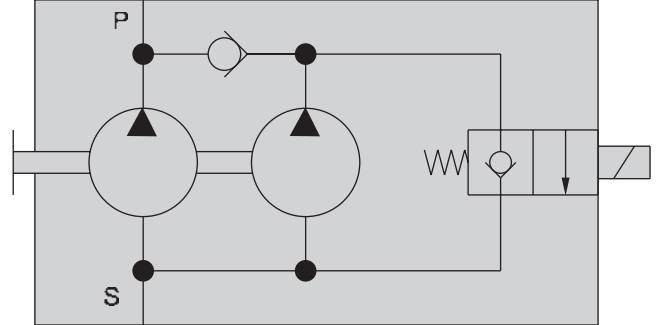

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

Priority Flow Divider




Port Configuration
End Priority, End Excess
Side Priority, Side Excess
End Priority, Side Excess
Side Priority, End Excess
Double Side Ported

Port Orientation
Priority Port on Pump Inlet Side
Priority Port on Pump Outlet Side

Function
Priority Flow Divider
PFD with Full Flow R/V
PFD with Pilot R/V

Priority Flow
8 lpm
11 lpm
15 lpm
19 lpm
23 lpm
30 lpm
38 lpm
others on request

R/V Setting
No Relief Valve
Adjustable 40 - 120 bar
Adjustable 130 - 250 bar
50 bar
80 bar
100 bar
110 bar
120 bar
130 bar
140 bar
150 bar
160 bar
170 bar
180 bar
200 bar
others on request

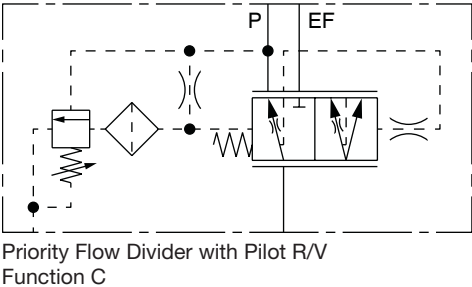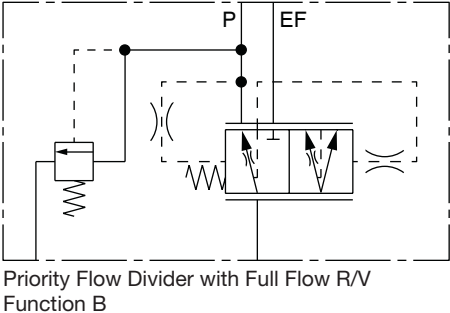

! WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov


Priority Flow Divider

Pressure Range	
P-port Maximum	230 bar
EF-port Maximum	250 bar


Maximum Flows	
for PGP511	
P-port	32 lpm
EF-port	70 lpm
max. input flow	70 lpm
for PGP517	
P-port	45 lpm
EF-port	100 lpm
max. input flow	100 lpm



Port Configuration A
Port Orientation B

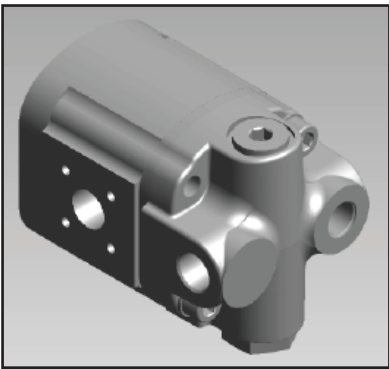

Port Configuration D
Port Orientation A

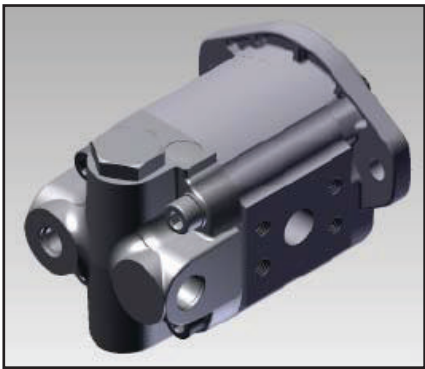

Port Configuration C
Port Orientation B

Comments:
The Priority Flow Divider provides a constant and specified flow for power steering or other priority functions. The balance of flow produced by the pump is available from the EF port for additional functions such as open center directional control valves, fan drives, etc. It can also be fitted with a pressure-relief valve.


Variations for PGP511/PGP517
without priority relief valve (Function A)
with full flow priority relief valve (Function B)
with pilot priority relief valve (Function C)

 **WARNING:** This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov


Load Sensing Priority Valve

Pressure Range	
P-port Maximum	230 bar
EF-port Maximum	equal to max. rating of pump


Maximum Flows	
for PGP511	
P-port	32 lpm
EF-port	70 lpm
max. input flow	70 lpm
for PGP517	
P-port	45 lpm
EF-port	100 lpm
max. input flow	100 lpm

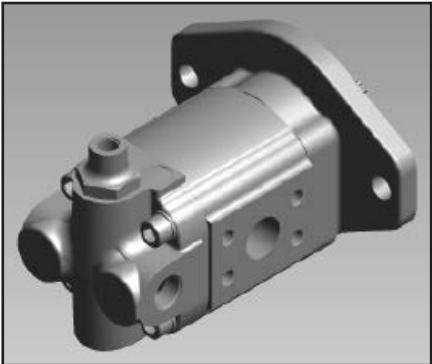


Port Configuration B
Port Orientation A

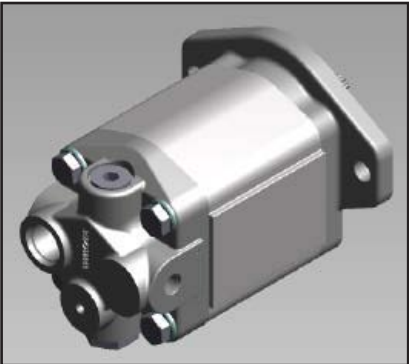

Port Configuration D
Port Orientation B

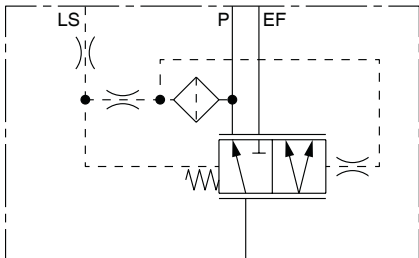

Load Sensing Priority Valve
with Dynamic Load Sensing Signal
Function F

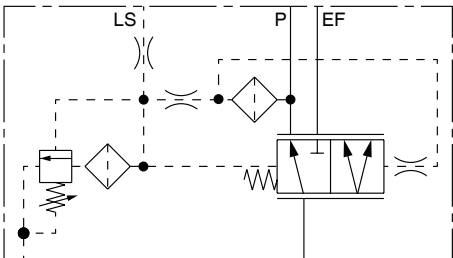

Load Sensing Priority Valve
with Dynamic Load Sensing Signal
Function G

Comments:
The Load Sense Priority Valve provides priority flow on demand, typically for LS power steering: The balance of the flow produced by the pump is available from the EF port for additional functions such as open center directional control valves, fan drives, etc. When the power steering is idle, full pump flow is available for these functions.
The selection of pilot relief and static or dynamic signal is dependent on the characteristics of the selected steering unit.



- Variations for PGP511/PGP517**
without pilot relief
dynamic LS signal (Function G) / with pilot relief
dynamic LS signal (Function F) / without pilot relief
static LS signal / with pilot relief
static LS signal

! WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov



Single Pressure-Relief Valve

Motor Range PGM511	
Maximum Flow	75 lpm
Pressure Range	25-250 bar

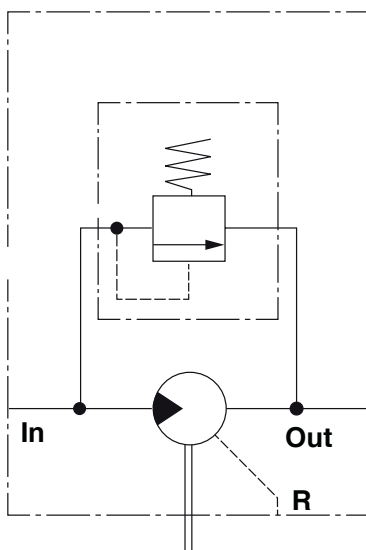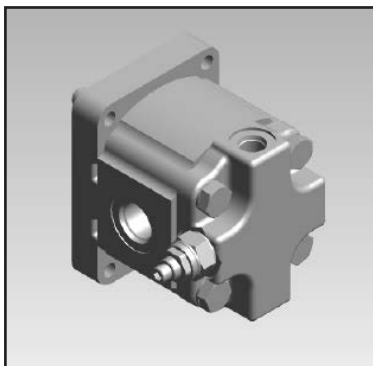

Comments:

Integral relief valve to protect the motor.

Motors with this valve may be applied in series with relief valve providing a limit to the pressure differential, and hence, the output torque.

Variations for PGM511

adjustable / with internal or external drain



Applications

Fan Drives, Mower Blade Drives, Compressor Drives and Water Pump Drives

 **WARNING:** This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

Single Pressure-Relief Valve with Anti-Cavitation

Motor Range PGM511	
Maximum Flow	100 lpm
Pressure Range	35-250 bar

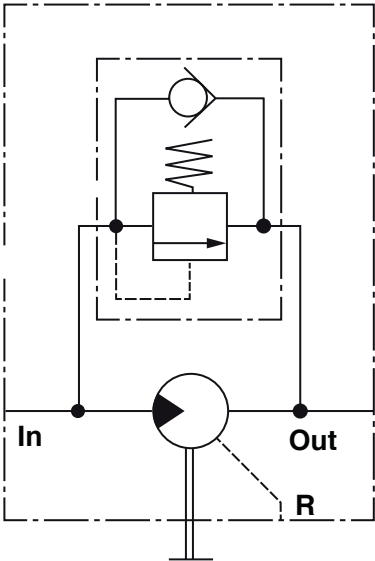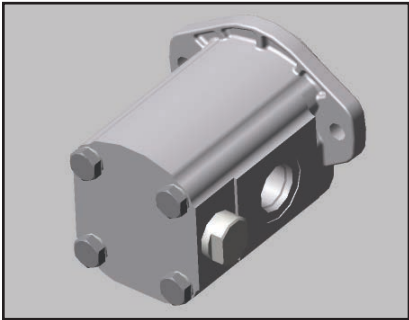

Comments:
Motors fitted with this relief valve may be applied in series with relief valve providing a limit to the pressure differential, and hence, the output torque.
The check valve allows the motor and driven load to “spool down” when the fluid supply is shut off or reduced due to engine speed fluctuations.
In series operation, the check valve permits the motor to come to a controlled stop should the outlet flow be suddenly blocked.
This valve reduces the risk of damaging the motor or blowing a hydraulic line.
Motors fitted with this valve are available with side or rear facing ports.


Variations for PGM511
Non-adjustable / with reverse flow check with internal or external drain

Applications
Fan Drives, Mower Blade Drives, Compressor Drives and Water Pump Drives

 **WARNING:** This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

Cross Port Pressure-Relief Valves

Motor Range PGM511	
Maximum Flow	75 lpm
Pressure Range	25-250 bar

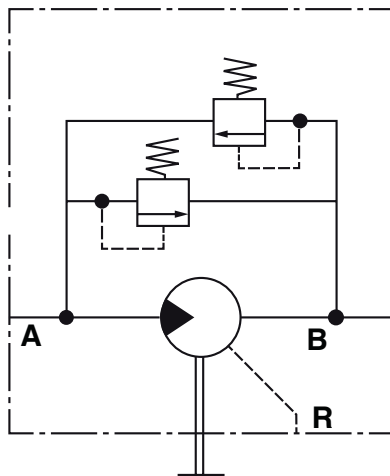**Comments:**

Integral cross port relief to protect motor and to limit torque in both directions of rotation.

Motors fitted with this relief valve cover may be operated in series with other motors downstream when using external case drain.

Limited change to the factory set is possible.

Side ports are standard in order to minimize overall length.

Variations for PGM511

adjustable / with internal and external drain

Applications


Fan Drives, Mower Reel Drives, and all low-medium power reversible drives



WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

Cross Port Pressure-Relief Valves with Anti-Cavitation

Motor Range PGM511	
Maximum Flow	100 lpm
Pressure Range	35-250 bar

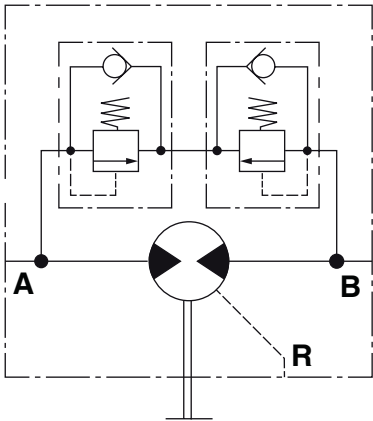

Comments:

Motors fitted this relief valve may be applied in series or in hydraulic transmission with relief valve providing a limit to the pressure differential, and hence, the output torque.
The check valves allow flow to return to the inlet of the motor to prevent cavitation.
Motor available with side ports, rear ports or combination of side and rear ports.

Variations for PGM511

non-adjustable / with internal or external drain


Applications

Fan Drives, Mower Blade Drives, Water Pump Drives and reversible hydrostatic transmissions


 **WARNING:** This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

Solenoid Proportional Pressure-Relief Valve

Motor Range PGM511	
Maximum Flow	95 lpm

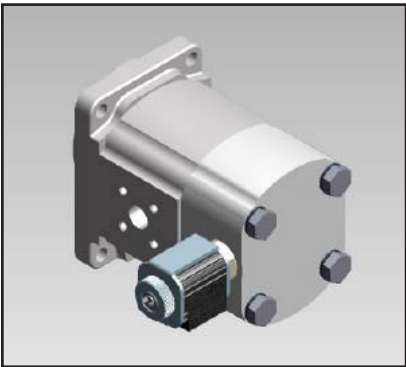

Pressure Range	
Pressure Range	standby pressure differential: 5 bar max.: equal to the max. pressure rating of the motor
Standard Pressure-Relief Settings	100 / 210 / 350 bar others on request
Termination	on request

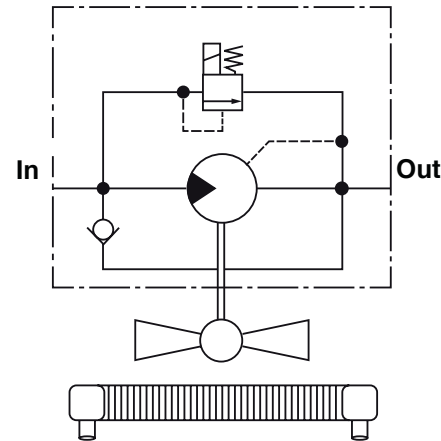

Comments:
In a fan drive circuit fan speed is adjusted by providing a varying Pulse Width Modulated electrical current signal to the proportional relief valve which controls the flow to the fan motor. The proportional valve is typically a normal closed type to assure failsafe full fan speed in case of a lost signal.
The anti-cavitation check valve allows the motor to spin freely when the fan is powered down.

Variations for PGM511
normally open valves / increasing pressure with increasing current
normally closed valves / decreasing pressure with increasing current with internal or tank return


Applications
Fan Drives

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

Speed Sensor

This rugged, weather resistant sensor uses proven reliable technology and was developed to meet the demanding needs of mobile applications.

- Tough stainless steel housing
- Sealed electrical connectors
- Easy installation
- Protected against shock, vibration and electromagnetic interference
- Excellent stability
- Wide range of operating conditions (IP67)

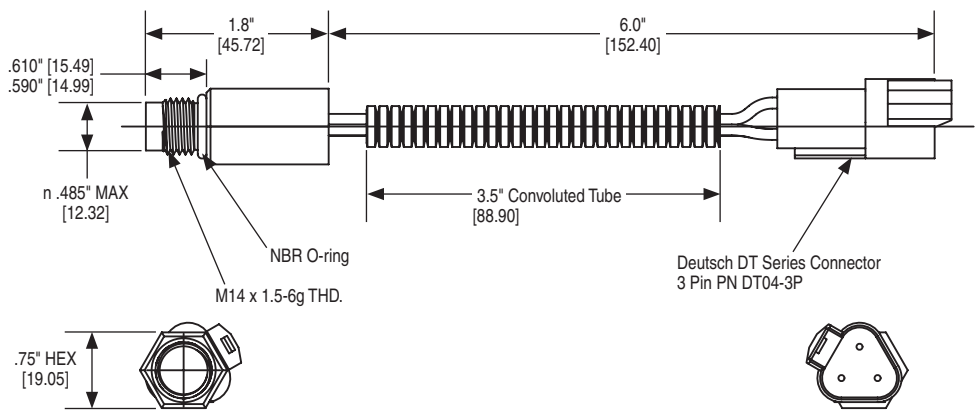

Speed Sensor Data	
Supply Voltage	5-30 VDC
Operational Voltage	5-27 VDC
Supply Current	13.5 mA MAX
Reverse Polarity Protection Switching Frequency	0 to 15 kHz
Output	Open collector no internal pull-up resistor 470 OHM series output resistor
Sensor Output	15 pulses/rev

PIN CONNECTIONS		
A	Red	Supply
B	Black	Ground
C	White	Signal

WARNING: This product can expose you to chemicals including lead or DEHP which are known to the state of California to cause cancer, birth defects, and other reproductive harm. www.p65warnings.ca.gov

[illegible]

PARKER-HANNIFIN CORPORATION
OFFER OF SALE

1. Definitions. As used herein, the following terms have the meanings indicated.

"Buyer" means any customer receiving a Quote for Products.

"Buyer's Property" means any tools, patterns, plans, drawings, designs, specifications materials, equipment, or information furnished by Buyer, or which are or become Buyer's property.

"Confidential Information" means any technical, commercial, or other proprietary information of Seller, including, without limitation, pricing, technical drawings or prints and/or part lists, which has been or will be disclosed, delivered, or made available, whether directly or indirectly, to Buyer.

"Goods" means any tangible part, system or component to be supplied by Seller.

"Intellectual Property Rights" means any patents, trademarks, copyrights, trade dress, trade secrets or similar rights.

"Products" means the Goods, Services and/or Software as described in a Quote.

"Quote" means the offer or proposal made by Seller to Buyer for the supply of Products.

"Seller" means Parker-Hannifin Corporation, including all divisions, subsidiaries and businesses selling Products under these Terms.

"Seller's IP" means patents, trademarks, copyrights, or other intellectual property rights relating to the Products, including without limitation, names, designs, images, drawings, models, software, templates, information, any improvements or creations or other intellectual property developed prior to or during the relationship contemplated herein.

"Services" means any services to be provided by Seller.

"Software" means any software related to the Goods, whether embedded or separately downloaded.

"Special Tooling" means equipment acquired by Seller or otherwise owned by Seller necessary to manufacture Goods, including but not limited to tools, jigs, and fixtures.

"Terms" means the terms and conditions of this Offer of Sale.

2. Terms. All sales of Products by Seller will be governed by, and are expressly conditioned upon Buyer's assent to, these Terms. These Terms are incorporated into any Quote provided by Seller to Buyer. Buyer's order for any Products whether communicated to Seller verbally, in writing, by electronic data interface or other electronic commerce, shall constitute acceptance of these Terms. Seller objects to any contrary or additional terms or conditions of Buyer. Reference in Seller's order acknowledgement to Buyer's purchase order or purchase order number shall in no way constitute an acceptance of any of Buyer's terms or conditions of purchase. Any Quote made by Seller to Buyer shall be considered a firm and definite offer and shall not be deemed to be otherwise despite any language on the face of the Quote. Seller reserves all rights to accept or reject any purported acceptance by Buyer to Seller's Quote if such purported acceptance attempts to vary the terms of the Quote. If Seller ships Products after Buyer issues an acceptance to the Quote, any additional or different terms proposed by Buyer will not become part of the parties' business relationship unless agreed to in a writing that is signed by an authorized representative of Seller, excluding email correspondence. If the transaction proceeds without such agreement on the part of Seller, the business relationship will be governed solely by these Terms and the specific terms in Seller's Quote.

3. Price; Payment. The Products set forth in the Quote are offered for sale at the prices indicated in the Quote. Unless otherwise specifically stated in the Quote, prices are valid for thirty (30) days and do not include any sales, use, or other taxes or duties. Seller reserves the right to modify prices for any reason and at any time by giving ten (10) days prior written notice. Unless otherwise specified by Seller, all prices are F.C.A. Seller's facility (INCOTERMS 2020). All sales are contingent upon credit approval and full payment for all purchases is due thirty (30) days from the date of invoice (or such date as may be specified in the Quote). Under any circumstances, Buyer may not withhold or suspend payment of any amounts due and payable as a deduction, set-off or recoupment of any amount, claim or dispute with Seller. Unpaid invoices beyond the specified payment date incur interest at the rate of 1.5% per month or the maximum allowable rate under applicable law. Seller reserves the right to require advance payment or provision of securities for first and subsequent deliveries if there is any doubt, in Seller's sole determination, regarding the Buyer's creditworthiness or for other business reasons. If the requested advance payment or securities are not provided to Seller's satisfaction, Seller reserves the right to suspend performance or reject the purchase order, in whole or in part, without prejudice to Seller's other rights or remedies, including the right to full compensation. Seller may revoke or shorten any payment periods previously granted in Seller's sole determination. The rights and remedies herein reserved to Seller are cumulative and in

addition to any other or further rights and remedies available at law or in equity. No waiver by Seller of any breach by Buyer of any provision of these terms will constitute a waiver by Seller of any other breach of such provision.

4. Shipment; Delivery; Title and Risk of Loss. All delivery dates are approximate, and Seller is not responsible for damages or additional costs resulting from any delay. All deliveries are subject to our ability to procure materials from our suppliers. Regardless of the manner of shipment, delivery occurs and title and risk of loss or damage pass to Buyer, upon placement of the Products with the carrier at Seller's facility. Unless otherwise agreed prior to shipment and for domestic delivery locations only, Seller will select and arrange, at Buyer's sole expense, the carrier and means of delivery. When Seller selects and arranges the carrier and means of delivery, freight and insurance costs for shipment to the designated delivery location will be prepaid by Seller and added as a separate line item to the invoice. Buyer shall be responsible for any additional shipping charges incurred by Seller due to Buyer's acts or omissions. Buyer shall not return or repackage any Products without the prior written authorization from Seller, and any return shall be at the sole cost and expense of Buyer.

5. Warranty. The warranty for the Products is as follows:

(i) Goods are warranted against defects in material or workmanship for a period of twelve (12) months from the date of delivery or 2,000 hours of use, whichever occurs first; (ii) Services shall be performed in accordance with generally accepted practices and using the degree of care and skill that is ordinarily exercised and customary in the field to which the Services pertain and are warranted for a period of six (6) months from the date of completion of the Services; and (iii) Software is only warranted to perform in accordance with applicable specifications provided by Seller to Buyer for ninety (90) days from the date of delivery or, when downloaded by a Buyer or end-user, from the date of the initial download. All prices are based upon the exclusive limited warranty stated above, and upon the following disclaimer: **EXEMPTION CLAUSE; DISCLAIMER OF WARRANTY, CONDITIONS, REPRESENTATIONS: THIS WARRANTY IS THE SOLE AND ENTIRE WARRANTY, CONDITION, AND REPRESENTATION, PERTAINING TO PRODUCTS. SELLER DISCLAIMS ALL OTHER WARRANTIES, CONDITIONS, AND REPRESENTATIONS, WHETHER STATUTORY, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THOSE RELATING TO DESIGN, NONINFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE. SELLER DOES NOT WARRANT THAT THE SOFTWARE IS ERROR-FREE OR FAULT-TOLERANT, OR THAT BUYER'S USE THEREOF WILL BE SECURE OR UNINTERRUPTED, UNLESS OTHERWISE AUTHORIZED IN WRITING BY SELLER, THE SOFTWARE SHALL NOT BE USED IN CONNECTION WITH HAZARDOUS OR HIGH-RISK ACTIVITIES OR ENVIRONMENTS. EXCEPT AS EXPRESSLY STATED HEREIN, ALL PRODUCTS ARE PROVIDED "AS IS".**

6. Claims; Commencement of Actions. Buyer shall promptly inspect all Products upon receipt. No claims for shortages will be allowed unless reported to Seller within ten (10) days of delivery. Buyer shall notify Seller of any alleged breach of warranty within thirty (30) days after the date the non-conformance is or should have been discovered by Buyer. Any claim or action against Seller based upon breach of contract or any other theory, including tort, negligence, or otherwise must be commenced within twelve (12) months from the date of the alleged breach or other alleged event, without regard to the date of discovery.

7. LIMITATION OF LIABILITY. IN THE EVENT OF A BREACH OF WARRANTY, SELLER WILL, AT ITS OPTION, REPAIR OR REPLACE THE NON-CONFORMING PRODUCTS, RE-PERFORM THE SERVICES, OR REFUND THE PURCHASE PRICE PAID WITHIN A REASONABLE PERIOD OF TIME. IN NO EVENT IS SELLER LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES INCLUDING ANY LOSS OF REVENUE OR PROFITS, WHETHER BASED IN CONTRACT, TORT OR OTHER LEGAL THEORY. IN NO EVENT SHALL SELLER'S LIABILITY UNDER ANY CLAIM MADE BY BUYER EXCEED THE PURCHASE PRICE PAID FOR THE PRODUCTS.

8. Confidential Information. Buyer acknowledges and agrees that Confidential Information has been and will be received in confidence and will remain the property of Seller. Buyer further agrees that it will not use Seller's Confidential Information for any purpose other than for the benefit of Seller and shall return all such Confidential Information to Seller within thirty (30) days upon request.

9. Loss to Buyer's Property. Buyer's Property will be considered obsolete and may be destroyed by Seller after two (2) consecutive years have elapsed without Buyer ordering the Products manufactured using Buyer's Property.

Also, Seller shall not be responsible for any loss or damage to Buyer's Property while it is in Seller's possession or control.

10. Special Tooling. Seller may impose a tooling charge for any Special Tooling. Special Tooling shall be and remain Seller's property. In no event will Buyer acquire any interest in the Special Tooling, even if such Special Tooling has been specially converted or adapted for manufacture of Goods for Buyer and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller has the right to alter, discard or otherwise dispose of any Special Tooling or other property owned by Seller in its sole determination at any time.

11. Security Interest. To secure payment of all sums due from Buyer, Seller retains a security interest in all Products delivered to Buyer and, Buyer's acceptance of these Terms is deemed to be a Security Agreement under the Uniform Commercial Code. Buyer authorizes Seller as its attorney to execute and file on Buyer's behalf all documents Seller deems necessary to perfect Seller's security interest.

12. User Responsibility. Buyer, through its own analysis and testing, is solely responsible for making the final selection of the Products and assuring that all performance, endurance, maintenance, safety and warning requirements of the application of the Products are met. Buyer must analyze all aspects of the application and follow applicable industry standards, specifications, and any technical information provided with the Quote or the Products, such as Seller's instructions, guides and specifications. If Seller provides options of or for Products based upon data or specifications provided by Buyer, Buyer is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the Products. In the event Buyer is not the end-user of the Products, Buyer will ensure such end-user complies with this paragraph.

13. Use of Products, Indemnity by Buyer. Buyer shall comply with all instructions, guides and specifications provided by Seller with the Quote or the Products. If Buyer uses or resells the Products in any way prohibited by Seller's instructions, guides or specifications, or Buyer otherwise fails to comply with Seller's instructions, guides and specifications, Buyer acknowledges that any such use, resale, or non-compliance is at Buyer's sole risk. Further, Buyer shall indemnify, defend, and hold Seller harmless from any losses, claims, liabilities, damages, lawsuits, judgments and costs (including attorney fees and defense costs), whether for personal injury, property damage, intellectual property infringement or any other claim, arising out of or in connection with: (a) improper selection, design, specification, application, or any misuse of Products; (b) any act or omission, negligent or otherwise, of Buyer; (c) Seller's use of Buyer's Property; (d) damage to the Products from an external cause, repair or attempted repair by anyone other than Seller, failure to follow instructions, guides and specifications provided by Seller, use with goods not provided by Seller, or opening, modifying, deconstructing, tampering with or repackaging the Products; or (e) Buyer's failure to comply with these Terms, including any legal or administrative proceedings, collection efforts, or other actions arising from or relating to such failure to comply. Seller shall not indemnify Buyer under any circumstance except as otherwise provided in these Terms.

14. Cancellations and Changes. Buyer may not cancel or modify, including but not limited to movement of delivery dates for the Products, any order for any reason except with Seller's written consent and upon terms that will indemnify, defend and hold Seller harmless against all direct, incidental and consequential loss or damage and any additional expense. Seller, at any time, may change features, specifications, designs and availability of Products.

15. Assignment. Buyer may not assign its rights or obligations without the prior written consent of Seller.

16. Force Majeure. Seller is not liable for delay or failure to perform any of its obligations by reason of any events or circumstances beyond its reasonable control. Such circumstances include without limitation: accidents, labor disputes or stoppages, government acts or orders, acts of nature, pandemics, epidemics, other widespread illness, or public health emergency, cyber related disruptions, cyber-attacks, ransomware sabotage, delays or failures in delivery from carriers or suppliers, shortages of materials, sudden increases in the price of raw material or components, shutdowns or slowdowns affecting the supply of raw materials or components, or the transportation thereof, oil shortages or oil price increases, energy crisis, energy or fuel interruption, war (whether declared or not) or the serious threat of same, riots, rebellions, acts of terrorism, embargoes, fire or any reason whether similar to the foregoing or otherwise. Seller will resume performance as soon as practicable after the event of force majeure has been removed. All delivery dates affected by an event of force majeure shall be tolled for the duration of such event of force majeure and rescheduled for mutually agreed dates as soon as practicable after the event of force majeure ceases to exist. The right to allocate capacity is in the Seller's sole discretion. An event of force majeure shall not include

financial distress, insolvency, bankruptcy, or other similar conditions affecting one of the parties, affiliates and/or subcontractors. An event of force majeure in the meaning of these Terms means any circumstances beyond Seller's control that permanently or temporarily hinders performance, even where that circumstance was already foreseen. Buyer shall not be entitled to cancel any orders following its claim of an event of force majeure.

17. Waiver and Severability. Failure to enforce any provision of these Terms will not invalidate that provision; nor will any such failure prejudice either party's right to enforce that provision in the future. Invalidity of any provision of these Terms shall not invalidate any other provision herein and, the remaining provisions will remain in full force and effect.

18. Duration. Unless otherwise stated in the Quote, any agreement governed by or arising from these Terms shall: (a) be for an initial duration of one (1) year; and (b) shall automatically renew for successive one-year terms unless terminated by Buyer with at least 180-days written notice to Seller or if Seller terminates the agreement pursuant to Section 19 of these Terms.

19. Termination. Seller may, without liability to Buyer, terminate any agreement governed by or arising from these Terms for any reason and at any time by giving Buyer thirty (30) days prior written notice. Seller may immediately terminate, in writing, if Buyer: (a) breaches any provision of these Terms, (b) becomes or is deemed insolvent, (c) appoints or has appointed a trustee, receiver or custodian for all or any part of Buyer's property, (d) files a petition for relief in bankruptcy on its own behalf, or one is filed against Buyer by a third party, (e) makes an assignment for the benefit of creditors; or (f) dissolves its business or liquidates all or a majority of its assets.

20. Ownership of Rights. Buyer agrees that (a) Seller (and/or its affiliates) owns or is the valid licensee of Seller's IP and (b) the furnishing of information, related documents or other materials by Seller to Buyer does not grant or transfer any ownership interest or license in or to Seller's IP to Buyer, unless expressly agreed in writing. Without limiting the foregoing, Seller retains ownership of all Software supplied to Buyer. In no event shall Buyer obtain any greater right in and to the Software than a right in a license limited to the use thereof and subject to compliance with any other terms provided with the Software. Buyer further agrees that it will not, directly or through intermediaries, reverse engineer, decompile, or disassemble any Software (including firmware) comprising or contained within a Product, except and only to the extent that such activity may be expressly permitted, either by applicable law or, in the case of open source software, the applicable open source license.

21. Indemnity for Infringement of Intellectual Property Rights. Seller is not liable for infringement of any Intellectual Property Rights except as provided in this Section. Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on a third-party claim that one or more of the Products infringes the Intellectual Property Rights of a third party in the country of delivery of the Products by Seller to Buyer. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of any such claim, and Seller having sole control over the defense of the claim including all negotiations for settlement or compromise. If one or more Products is subject to such a claim, Seller may, at its sole expense and option, procure for Buyer the right to continue using the Products, replace or modify the Products to render them non-infringing, or offer to accept return of the Products and refund the purchase price less a reasonable allowance for depreciation. Seller has no obligation or liability for any claim of infringement: (i) arising from information provided by Buyer (including Seller's use of Buyer's Property); or (ii) directed to any Products for which the designs are specified in whole or part by Buyer; or (iii) resulting from the modification, combination or use in a system of any Products. The foregoing provisions of this Section constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for claims of infringement of Intellectual Property Rights.

22. Governing Law. These Terms, the terms of any Quote, and the sale and delivery of all Products are deemed to have taken place in, and shall be governed and construed in accordance with, the laws of the State of Ohio, as applicable to contracts executed and wholly performed therein and without regard to conflicts of laws principles. Buyer irrevocably agrees and consents to the exclusive jurisdiction and venue of the courts of Cuyahoga County, Ohio with respect to any dispute, controversy or claim arising out of or relating to the sale and delivery of the Products.

23. Entire Agreement. These Terms, along with the terms set forth in the Quote, forms the entire agreement between the Buyer and Seller and constitutes the final, complete and exclusive expression of the terms of sale and purchase. In the event of a conflict between any term set forth in the Quote and these Terms, the terms set forth in the Quote shall prevail. All prior or contemporaneous written or oral agreements or negotiations with

respect to the subject matter shall have no effect. No modification to these Terms will be binding on Seller unless agreed to in a writing that is signed by an authorized representative of Seller, excluding email correspondence, 'clickwrap' or other purported electronic assent to different or additional terms. Sections 2-25 of these Terms shall survive termination or cancellation of any agreement governed by or arising from these Terms.

24. No 'Wrap' Agreements/No Authority to Bind. Seller's clicking any buttons or any similar action, such as clicking "I Agree" or "Confirm," to utilize Buyer's software or webpage for the placement of orders, is NOT an agreement to Buyer's Terms and Conditions. **NO EMPLOYEE, AGENT OR REPRESENTATIVE OF SELLER HAS THE AUTHORITY TO BIND SELLER BY THE ACT OF CLICKING ANY BUTTON OR SIMILAR ACTION ON BUYER'S WEBSITE OR PORTAL.**

25. Compliance with Laws. Buyer agrees to comply with all applicable laws, regulations, and industry and professional standards, including those of the United States of America, and the country or countries in which Buyer may operate, including without limitation the U.S. Foreign Corrupt Practices Act ("FCPA"), the U.S. Anti-Kickback Act ("Anti-Kickback Act"), U.S. and E.U. export control and sanctions laws ("Export Laws"), the U.S. Food Drug and Cosmetic Act ("FDCA"), and the rules and regulations promulgated by the U.S. Food and Drug Administration ("FDA"), each as currently amended. Buyer agrees to indemnify, defend, and hold harmless Seller from the consequences of any violation of such laws, regulations and standards by Buyer, its employees or agents. Buyer represents that it is familiar with all applicable provisions of the FCPA, the Anti-Kickback Act, Export Laws, the FDCA and the FDA and certifies that Buyer will adhere to the requirements thereof and not take any action that would make Seller violate such requirements. Buyer represents and agrees that Buyer will not make any payment or give anything of value, directly or indirectly, to any governmental official, foreign political party or official thereof, candidate for foreign political office, or commercial entity or person, for any improper purpose, including the purpose of influencing such person to purchase Products or otherwise benefit the business of Seller. Buyer further represents and agrees that it will not receive, use, service, transfer or ship any Products from Seller in a manner or for a purpose that violates Export Laws or would cause Seller to be in violation of Export Laws. Buyer agrees to promptly and reliably provide Seller all requested information or documents, including end-user statements and other written assurances, concerning Buyer's ongoing compliance with Export Law.

Supersedes: HY13-PMD500/US June 2020 Effective: HY13-PMD500/US April 2021

Parker Hannifin Corporation
Pump & Motor Division
101 Canterbury Road
Kings Mountain, NC 28086
Phone: (704) 730-2000
Fax: (704) 730-7411
www.parker.com/pmd

Your Local Authorized Parker Distributor

